



Universiteit
Leiden
The Netherlands

Materials and energy : a story of linkages

Kleijn, E.G.M.

Citation

Kleijn, E. G. M. (2012, September 5). *Materials and energy : a story of linkages*. Retrieved from <https://hdl.handle.net/1887/19740>

Version: Not Applicable (or Unknown)

License: [Licence agreement concerning inclusion of doctoral thesis in the Institutional Repository of the University of Leiden](#)

Downloaded from: <https://hdl.handle.net/1887/19740>

Note: To cite this publication please use the final published version (if applicable).

Cover Page



Universiteit Leiden



The handle <http://hdl.handle.net/1887/19740> holds various files of this Leiden University dissertation.

Author: Kleijn, René

Title: Materials and energy : a story of linkages

Date: 2012-09-05

Chapter 4

Metal requirements of low-carbon power generation

Abstract

Today, almost 70% of the electricity is produced from fossil fuels and power generation accounts for over 40% of global CO₂ emissions. If the targets to reduce climate change are to be met, substantial reductions in emissions are necessary. Compared to other sectors emission reductions in the power sector are relatively easy to achieve because of it consists mainly of point-sources. Carbon capture and storage (CCS) and the use of low-carbon alternative energy sources are the two categories of options to reduce CO₂ emissions. However, for both options additional infrastructure and equipment is needed. This article compares CO₂ emissions and metal requirements of different low-carbon power generation technologies on the basis of Life Cycle Assessment. We analyze the most critical output (CO₂) and the most critical input (metals) in the same methodological framework. CO₂ emissions and metal requirements are compared with annual global emissions and annual production for different metals. It was found that all technologies are very effective in reducing CO₂ emissions. However, CCS and especially non-fossil technologies are substantially more metal intensive than existing power generation. A transition to a low-carbon based power generation would require a substantial upscaling of current mining of several metals.

Published as: Kleijn, R., E. van der Voet, G. J. Kramer, L. van Oers, and C. van der Giesen. 2011. Metal requirements of low-carbon power generation. Energy 36(9): 5640-5648.

4.1 Introduction

The demand for electricity has been rising steadily ever since its introduction in the late 19th century (Fouquet 2008). Since 1980 the average annual growth in demand has been over 3% and this growth is projected to continue in the future (International Energy Agency 2009a). The expected introduction of new technologies such as electric vehicles and heat pumps may even accelerate this demand growth in the future. In 2007 the installed capacity for power generation was over 4,000 GW and the world electricity production in that year was almost 20,000 TWh (International Energy Agency 2009a). Almost 70% of this electricity is produced from fossil fuels (International Energy Agency 2009b) mainly coal (41%) and natural gas (21%). Power generation accounts for over 40% of global CO₂ emissions with an annual emission of 29 Gt in 2007 (International Energy Agency 2009c). Hence, power generation is one of the major contributors to climate change.

If the targets to reduce climate change are to be met, the share of electricity in the energy sector should increase while the emissions from this sector should be substantially reduced. According to the IPCC, emissions need to be reduced by 50 to

85% below 2000 levels by 2050, in order to stabilize atmospheric CO₂ concentrations at 450-490 ppm (Metz et al. 2007). This is estimated to correspond with a temperature increase of 2 °C to 2.4 °C. More than half of this decrease can be achieved by efficiency improvements, the remainder would have to come from Carbon Capture and Storage (CCS) and non-fossil alternatives (International Energy Agency 2009a).

4.1.1 Material requirements of power generation

In this paper we explore how and to what extent material requirements may constrain the scale-up of low-carbon power generation technologies. In an earlier study we found that for some specific technologies the use of minor metals may prevent them from growing to a significant global scale (Kleijn and van der Voet 2010a). The requirements of minor metals will not be discussed here. Next to these minor metals it is also clear that in general the material intensity of new energy technologies is higher than for existing technologies. For CCS this is a logical consequence of the additional infrastructure that is needed for the capture, transport and storage of CO₂ in combination with the loss of efficiency in power plants. For non-fossil technologies this is related to the relatively high material intensity that is needed for harvesting energy from diffuse sources, such as wind and sunlight.

4.1.2 Goal of the study

In this article we will present an analysis of the effectiveness of CO₂ emission reduction and the requirements of selected metals in low-carbon electricity technologies: iron, aluminum, nickel, copper, zinc, tin, molybdenum, silver and uranium. These metals are chosen as a mix of major metals that are important for the general infrastructure: iron, aluminum, copper and zinc; metals that are important for special alloys: nickel, tin and molybdenum; and metals that are important for specific technologies: silver and uranium.

The main research questions addressed here are:

1. to what extent can CCS and current non-fossil technologies contribute to CO₂ emission reduction targets of 50-85% ?
2. what are the metal requirements of these CCS and non-fossil technologies?
3. how does this metal demand compare to current mine production ?

We will start by comparing CO₂ emissions and metal requirements of different electricity producing technologies on a life cycle basis. After that CO₂ emissions and metal requirements of four cases will be compared:

- the current electricity mix (International Energy Agency 2009b)
- the current electricity mix but with the assumption that all fossil fuel based electricity would be fitted with CCS
- an electricity mix consisting of only existing non-fossil technologies
- the 2050 electricity mix as described in the IEA Blue Map Scenario (International Energy Agency 2008).

The emissions and metal requirements are then compared with annual global CO₂ emissions and annual mine production for different metals. Possible bottlenecks are identified and possible solutions are discussed.

4.1.3 Other constraints for low-carbon power generation

Material availability is only one of several factors that might constrain the scale up of the low-carbon electricity technologies. Although these are not the subject of this paper, the most important constraints are briefly discussed in this section: economic constraints, constraints of industrial capacity and spatial and infrastructure planning.

Under the existing economic regime, low-carbon electricity technologies are often more expensive than the dominant fossil fuel based technologies. Only large scale hydropower, nuclear power and wind turbines can compete with fossil fuel based electricity under specific circumstances, while the production price solar electricity is much higher per kWh produced (Raugei and Frankl 2009; Kammen and Pacca 2004) . Furthermore, massive investments are needed for additional infrastructure, either in power transmission for non-fossil energy sources or in CO₂ pipelines for the CCS (Hammond et al. 2011). Subsidies, feed-in-tariffs and other economic instruments are used to overcome this price-gap but this requires considerable shifts in tax regimes and legislation.

However, even if new technologies are competitive with the existing ones, it takes time to build the human and industrial capacity to scale them up to substantial levels i.e.. more than 10% of current production (Kramer and Haigh 2009). In 2007 world installed power generation capacity was around 4500 GW and this is projected to increase to around 7800 GW by 2030 (International Energy Agency 2009a). Around 37.5 GW newly installed wind capacity was added in 2009 (Global Wind Energy Council 2009). With a capacity factor of around 0.25-0.4 (Global Wind Energy Council 2010) this is equivalent to about 15 GW installed coal or nuclear capacity (assuming capacity factors of between 0.7 and 0.9) (U.S. Energy Information Administration 2010). PV solar is still far from this level with a newly installed capacity of 5,4 GW in 2008 (REN21 2009). With a capacity factor of around 0.14 (Schiermeier et al. 2008) this is equivalent to 1.5 GW installed coal or nuclear power. In order to contribute significantly to the global power generation capacity in 2030 the production of both wind and PV solar need to be scaled up dramatically.

Next to the economic issues the and industrial capacity, discussions on spatial and infrastructure planning are common when new nuclear power plants, wind turbines and CCS projects are planned and this can slow down the implementation of these technologies considerably (Kintisch 2010b, 2010a).

4.2. Analysis of CO₂ emissions and metal requirements of different technologies

Life Cycle Assessment (LCA) is used here to analyze the CO₂ emissions and metal requirements of different technologies for power generation. In a LCA all emissions and extractions over the whole life cycle of products and services are considered. In this article we limit the scope to CO₂ emissions and the metal requirements. Furthermore, we limit the study to the production of the electricity. This means that the transmission, distribution and use of the electricity is not included. This simplification might lead to a relative overestimation of material needs for distributed power generation options like rooftop PV and distributed wind power. Both of these options would reduce the amount of transmission capacity that is needed. However, in practice, large scale centralized wind and PV farms are needed in order to achieve a substantial contribution to the global electricity production (Kleijn and van der Voet 2010a; MacKay 2009). Centralized wind and PV farms will actually increase the transmission network that is needed. Next to that, a substantial buffering infrastructure would be needed in order to facilitate a substantial share of the renewables in the electricity mix.

The production of the infrastructure, equipment and materials, the transport and mining of fossil fuels and raw materials that are needed for the electricity production are all taken into account. The functional unit of this LCA, which is the basis for comparison of the different technologies, is 1 kWh of electricity delivered to the grid.

4.3 Implications for mass deployment – three cases

In order to assess the effectiveness with regard to CO₂ emission reduction and the metal requirements, three cases for world electricity supply will be compared with a reference case (Table 4-1). The reference case is based on the 2007 energy mix for power generation as given by the IEA (International Energy Agency 2009b). We defined two alternative cases based on different technologies to reduce global CO₂ emissions: CCS and non-fossil energy sources. The cases are not meant to represent a realistic future electricity mix but they are used here as two extremes of the spectrum of low-carbon power generation. Future power generation will most likely consist of a mix of CCS and non-fossil electricity. Therefore, next to these extreme cases, a fourth case was introduced which was based on the electricity mix from IEA BLUE Map scenario as described in (International Energy Agency 2008). This mix was combined with the global electricity supply in 2007. For the electricity production part, the IEA BLUE Map case is based on a combination of low-carbon technologies and CCS.

The CCS case is identical to the reference case but all incineration based electricity (coal, natural gas, oil and biomass) is assumed to be connected to a CCS infrastructure. The non-fossil case assumes a power mix with an equal distribution

Metal requirements power generation

over the different non-fossil technologies: 20% nuclear, 20% hydro, 20% wind, 20% PV and 20% biomass. Although this choice seems arbitrary, it is actually a reasonable reflection of the potential (and limitations) of each of these technologies. Intermittency of wind and solar will mean that buffering is needed and that it is sensible to mix them with other sources. Allocating 20% of the electricity mix to both seems therefore reasonable. Although recent growth in hydropower has been substantial and some large projects are still in the pipeline a limited increase from the current 15.6% to 20% of the mix seems reasonable to assume. The best locations for hydropower have been developed already and the environmental and social implications of large projects will limit its growth potential. Nuclear power is back on the political agenda in developed countries and many developing countries are just beginning to explore its potential (International Atomic Energy Agency 2009; Guang and Wenjie 2010). However, the lack of industrial capacity, risks of proliferation, limited capacity for the storage of nuclear waste and difficulties to scale up uranium supply are likely to limit the extent of the growth (Lior 2008). An expansion from the current 14% to 20% seems just doable. In the IEA BLUE Map case the contribution of fossil fuels is limited to 32% which is almost completely combined with CCS. Nuclear is scaled up to 24% and hydro scaled down (relatively) to 13%. Solar and wind combined deliver 25%, and 6% is derived from biomass¹.

Table 4-1: Electricity mix in different cases based on the 2007 global power generation of 19855 TWh (International Energy Agency 2009b)

	current mix		CCS		low carbon		IEA BLUE map	
	%	TWh	%	TWh	%	TWh	%	TWh
coal	41.4%	8220					0%	
coal + CCS			41.8%	8302			14%	2694
natural gas	20.8%	4130					4%	863
natural gas + CCS			21.0%	4171			14%	2689
oil	5.6%	1112					0%	66
oil + CCS			5.7%	1123			0%	0
nuclear	13.7%	2720	13.8%	2747	20%	3971	24%	4856
hydro	15.6%	3097	15.8%	3128	10%	1986	13%	2591
biomass rape seed oil					15%	2978	3%	604
biomass waste wood								
chips in CHP	0.96%	191	0.97%	193	15%	2978	3%	604
wind	0.87%	173	0.88%	174	20%	3971	13%	2549
PV solar	0.02%	4	0.02%	4	20%	3971	12%	2342
others	1.1%	218						
total	100%	19865	100%	19843	100%	19855	100%	19855

In the CCS and low carbon scenario the 1.1 % others is proportionally distributed over the other categories. In the IEA BLUE map scenario the category 'others' accounted for 5%. This 5% was also proportionally distributed over the other categories.

¹ It should be kept in mind that the IEA BLUE Map mix is based on the electricity production in 2030 which is assumed to be about double that of 2007.

4.4 Methods & data sources

LCA is used to calculate CO₂ emissions and metal requirements per kWh electricity produced with different technologies. The LCA was performed using version 5.0 of CMLCA (Heijungs 2010). EcoInvent 2.0 (Frischknecht et al., 2007) was used as the LCA database for all electricity technologies and all background data and it was supplemented with additional data for Carbon Capture and Storage (van der Giesen 2008). Abbreviations, descriptions and data sources of the different technologies are given in Table 4-2. The basic data that was used for the natural gas and coal fired power plants with CCS is given in Table 4-3. For biomass two technologies have been analyzed which more or less represent a worst and best case. The 'best case' is Combined Heat and Power with waste woodchips as a source of biomass. The 'worst case' is rape seed oil which is fed into an oil fired power plant. The metal intensities and CO₂ emissions of the different technologies are then multiplied by the total electricity demand and mix as given in Table 4-1. This results in the total annual CO₂ emissions and metal requirements for the current mix, the CCS mix and the non-fossil mix.

This bottom-up approach to calculate global CO₂ emissions and metal requirements on the basis of individual technologies should be seen as rough estimations of actual emissions and metal requirements. In reality the mix of energy technologies is much more diverse than the one used here. Secondly, when the total energy production is used as the basis for calculations the substantial extra installed capacity which is needed for peak-demand is not taken into account. Finally, in the non-fossil scenario buffering will be needed because 40% of the sources (solar and wind) are intermittent by nature. This buffering can either be done by installing back-up capacity of non-intermittent technologies like nuclear and biomass, or by adding storing options like compressed gas, pumped hydro, batteries etc. Both options will add to the metal requirements and increase CO₂ emissions of the system as a whole. In this very simplified analysis we did not take these factors into account.

In a final step the reduction in CO₂ emission is compared with the emission reduction of 50% to 85% below 2000 levels which is needed for stabilization of atmospheric CO₂ concentrations. The metal requirements are compared with the annual global production of these metals. Data on annual global production are taken from the US Geological Survey (U.S. Geological Survey 2010).

Metal requirements power generation

Table 4-2: Description of power generation pathways, other data from Eco-invent 2.0

abbreviation	description	additional data
<i>current mix electricity</i>		
coal	production of electricity via burning of coal UCTE (European weighted average)	-
natural gas	production of electricity via burning of natural gas UCTE (European weighted average)	-
oil	production of electricity via burning of crude oil UCTE (European weighted average)	-
nuclear	production of electricity in nuclear power plant UCTE (European weighted average)	-
wind	production of electricity with 2 MW offshore wind turbine OCE	-
solar biomass	production of electricity with 3 kWp flat roof PV installations based on mc-Si rape seed oil in oil fired power plant	- a combination of two ecoinvent processes: rape seed oil production and an oil fired power plant
biomass	CHP waste wood chips	-
hydro	Alpine region hydropower	-
<i>electricity with CCS</i>		
coal + CCS	as coal but with Carbon Capture and Storage (CCS)	CCS (van der Giesen 2008)
natural Gas + CCS	as gas but with Carbon Capture and Storage (CCS)	CCS (van der Giesen 2008)
oil + CCS	as coal but with Carbon Capture and Storage (CCS)	CCS (van der Giesen 2008)
biomass+CCS	as biomass but with Carbon Capture and Storage as in natural gas CCS	CCS (van der Giesen 2008)

Chapter 4

Table 4-3: Basic data natural gas and coal power plants with CCS (based on (van der Giesen 2008))

	natural gas	coal	source
power plant			
type	Combined Cycle	pulverized coal	(Frischknecht R. 2007)
size	400MWe	400MWe	(Frischknecht R. 2007)
efficiency	57.7%	35.9%	(Frischknecht R. 2007)
lifetime	180000 hours	150000 hours	(Frischknecht R. 2007)
operation	8000 hours/a	8000 hours/a	(Frischknecht R. 2007)
CO ₂ emission	350 g/kWh (plant only)	930 g/kWh (plant only)	(Frischknecht R. 2007)
CO ₂ concentration flue gas	3.9 mol%	12.8 mol%	(Ramezan and Skone 2007; Fluor and Statoil 2005)
steel in construction	10600 ton	35000 ton	(Frischknecht R. 2007)
efficiency loss due to capture and compression	25%	15%	(Odeh and Cockerill 2008; Spath and Mann 2004)
capture installation			
type	post combustion	post combustion	
solvent	35% MEA	35% MEA	(Fluor and Statoil 2005)
capture efficiency	90%	90%	(Fluor and Statoil 2005)
carbon steel	3700 ton	5560 ton	(van der Giesen 2008)
stainless steel	950 ton	1470 ton	(van der Giesen 2008)
life time	30 year	30 year	(van der Giesen 2008)
compression			
pressure at injectionpoint	100 bar	100 bar	(van der Giesen 2008)
pressure after compression	140 bar	140 bar	(van der Giesen 2008)
weight compressor and pump	210 ton	550 ton	(van der Giesen 2008)
electricity needs	86.5 kWh/ton CO ₂	86.5 kWh/ton CO ₂	(van der Giesen 2008)
life time	15 years	15 years	(van der Giesen 2008)
Pipeline			
length	200 km	200 km	(van der Giesen 2008)
size	NPS 10	NPS 16	(van der Giesen 2008)
wall thickness	6.4 mm	8.9 mm	(van der Giesen 2008)
weight	42 kg/m	93 kg/m	(van der Giesen 2008)
total weight	8400 ton	18600 ton	(van der Giesen 2008)
Injection			
depth of well	1000 m	1000 m	(van der Giesen 2008)
number of wells	1	2.7	(van der Giesen 2008)
stainless steel	210	570	(van der Giesen 2008)

4.5 Results

4.5.1 Analysis of the CO₂ emissions and metal requirements of individual technologies

The results of the calculations of CO₂ emissions and metal requirements of the different electricity producing technologies are given in Figure 4-1 to 4-3. Figure 4-1 shows the CO₂ emissions of different technologies. The application of CCS, will reduce CO₂ emissions from fossil fuel based power plants with a factor 10. For biomass the emissions related to the use of rape seed oil are about half of those of natural gas fired power, without CCS. For the CHP with waste wood the emissions are a factor 30 lower. For nuclear, hydro and wind, CO₂ emissions are very low but not zero. This is caused by the necessary production of equipment, capital goods and infrastructure. In a static attributional LCA, as we have used here, this uses the inputs of the current fossil fuel dominated energy system. For the same reason and because construction and production is relatively more material and energy intensive the emissions related to solar electricity are comparable with those of fossil fuels with CCS.

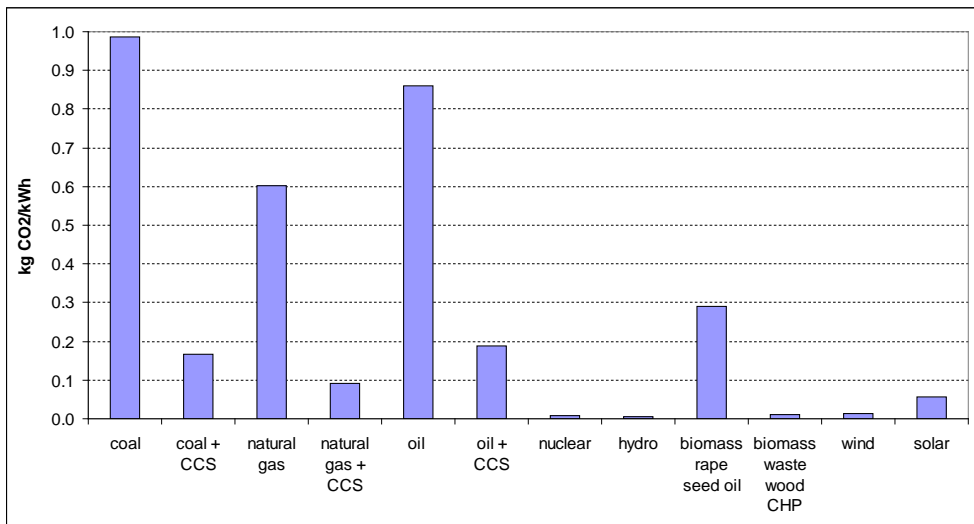


Figure 4-1: CO₂ emissions of different power generation technologies

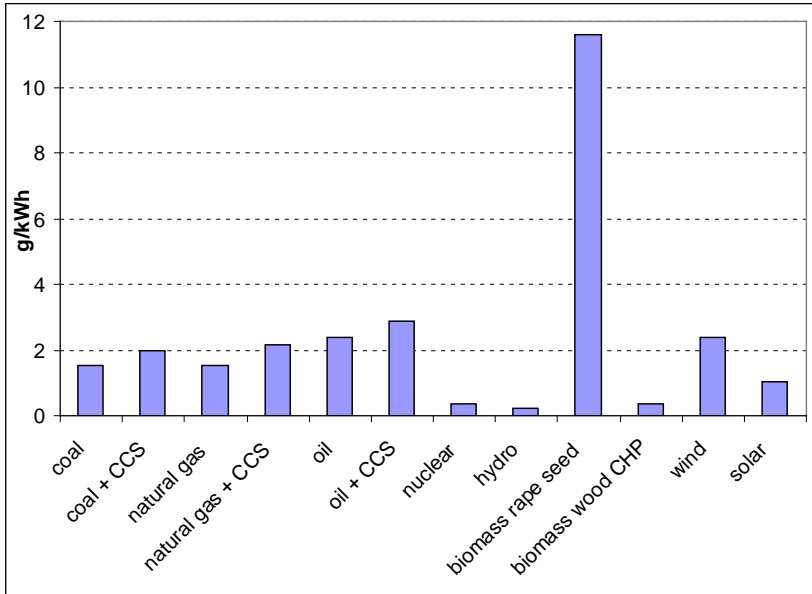


Figure 4-2: Iron requirements in different power generation technologies

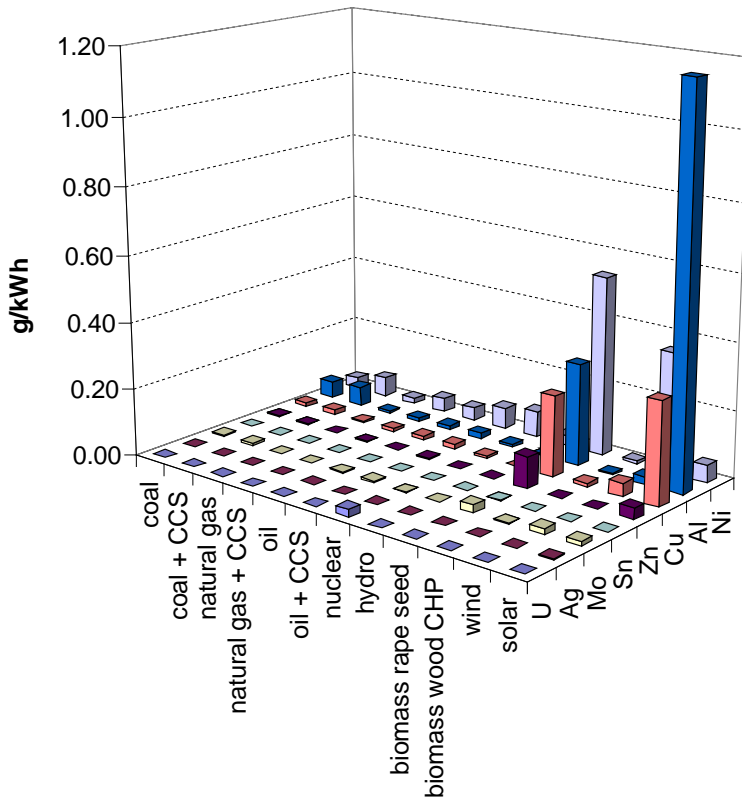


Figure 4-3: Requirements of selected metals in different power generation technologies

Metal requirements power generation

With regard to the metal requirements it is clear from Figure 4-2 and 4-3 that CCS will increase the demand for iron and nickel substantially. For coal fired power plants, the increase is about 30% for iron and 75% for nickel. For gas fired power plants, it is about 40% for iron and 150% for nickel. This is caused by additional infrastructure, especially the pipelines and the additional capacity needed to compensate for the loss in efficiency. Wind requires 20% more iron than coal plus CCS and solar is in the same range as natural gas power plants. Biomass energy based on rape seed oil requires about five times as much iron per kWh electricity produced than regular fossil fuel based energy. The reason for this lies in agricultural production of the biomass, which requires substantial inputs like fertilizers and capital goods per unit biomass produced. The intensity for other metals is given in Figure 4-3 and is especially high for the all new non-fossil technologies like rape seed based biomass, PV-solar and wind. For biomass the reason is again the high amounts of fertilizers and capital goods required. For wind and solar it is metal intensive turbines and solar panels and their production.

In Figure 4-4 the material demand of different technologies is given relative to the metal demand of the current electricity mix. It is clear that requirements for most metals are higher in the case of CCS, but much more so in the case of non-fossil technologies.

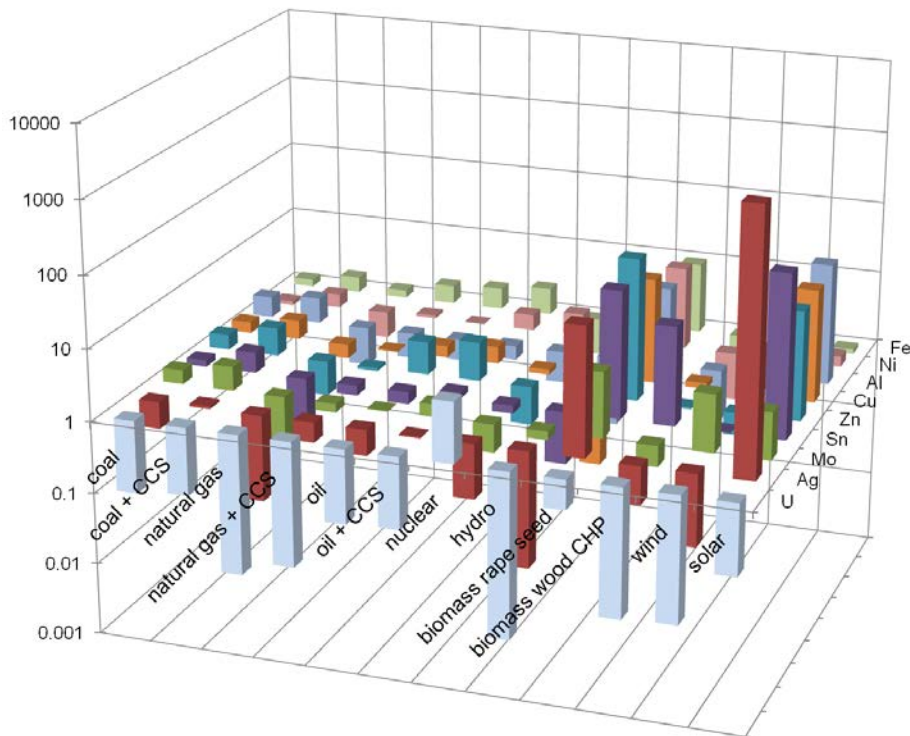


Figure 4-4: Requirements of selected metals in different power generation technologies relative to the metal demand of the current mix

4.5.2 Analysis of the CO₂ emissions and metal requirements at world scale implementation – the three cases.

In Figure 4-5 the CO₂ emissions of the three different cases and the reference case are given. The 11.6 Pg of annual CO₂ emissions from power generation compares well with the 11.9 Pg/a which is given by the IEA (International Energy Agency 2009c). However, in contrast to the IEA figures, the emissions we calculated are "life-cycle" emissions which means that the emissions of the production of the fuels and capital goods and all other upstream processes are included in the 11.6 Pg/a. Since over 90% of the life cycle CO₂ emissions from gas and coal based electricity originate from the power plants themselves and less than 10% from the background processes this still means the bottom-up figures we calculated are in correct order of magnitude. At an assumed 90% capture rate at the power station, CCS reduces the life cycle emissions to around 17% of the emissions in the current mix. The non-fossil case reduces the emissions just a little extra to about 10% of the current mix. The IEA BLUE Maps scenario is about as effective as the other two cases. All three cases are thus more or less equally efficient in reducing CO₂ emissions. All three fall well within the range of emission reductions (50-85%) that are necessary to stabilize atmospheric CO₂ concentration to levels around 450 ppm.

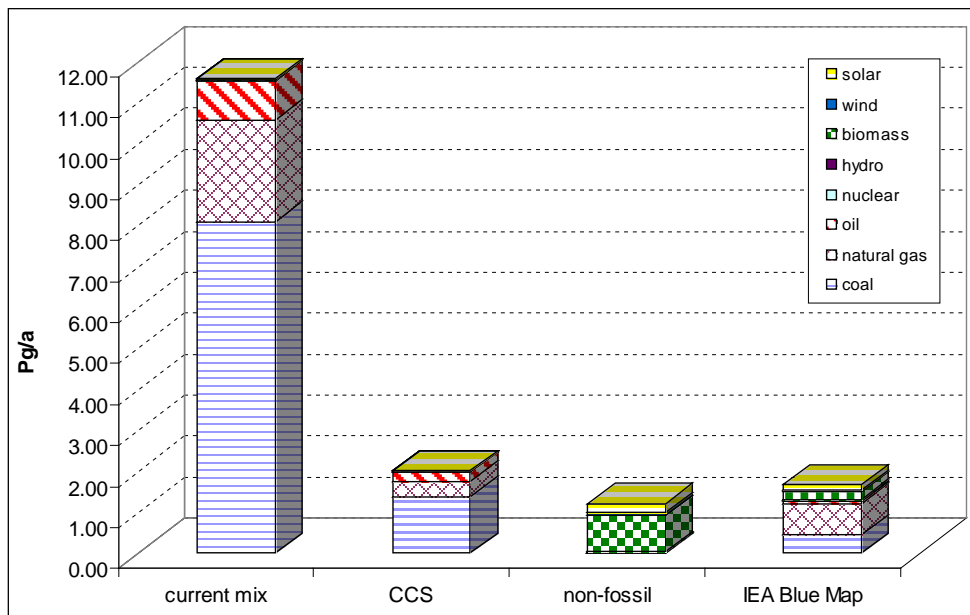


Figure 4-5: CO₂ emissions in the different power mix cases

Figure 4-6 and 4-7 show the metal requirements for the CCS, non-fossil, IEA BLUE maps cases in relation to the current mix. The CCS case requires an annual input which is 10% (silver) to 40% (nickel) higher than that in the current mix. For uranium the annual requirement remains constant as the nuclear fraction in the mix remains constant in this case. The non-fossil case requires far more metals than the current

Metal requirements power generation

mix: between 1.5 times (uranium) and almost 800 times (silver) the amount in the current mix.

Whether these increases are important becomes more clear, when the requirements for power generation are compared with current annual mine production. Figure 4-8 shows the annual metal requirements in the three cases and reference case, given as a fraction of the 2009 world mine production of these metals. From this analysis it is clear that the increases of metal requirement of iron, tin, and zinc are relatively insignificant when compared to current mine production. However, the increases in requirements in the non-fossil case for aluminum (1% to 15%), nickel (50% to 250%), molybdenum (30% to 100%) and silver (0% to 44%) but also uranium (130% to 190%) would have a significant impact on the mining of these metals. In the CCS case the material requirements are less but still significant. Nickel demand would go from about 60% to over 80% of the annual production and for molybdenum from about 30% to 40%. In the IEA BLUE maps case the material requirements are in between as expected.

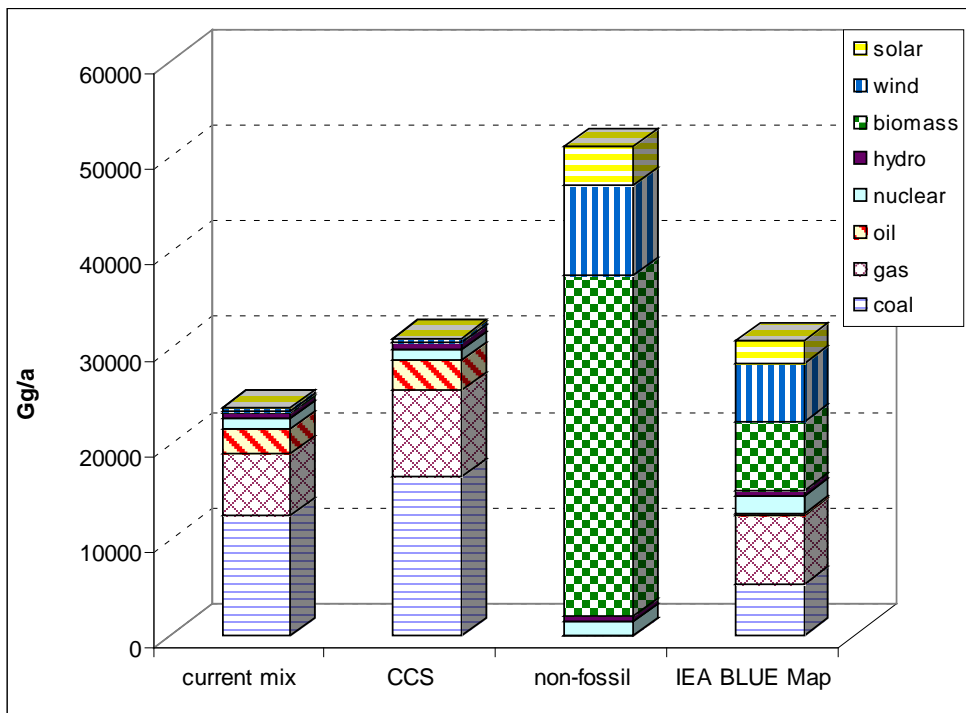


Figure 4- 6: Iron requirements in different power mix cases

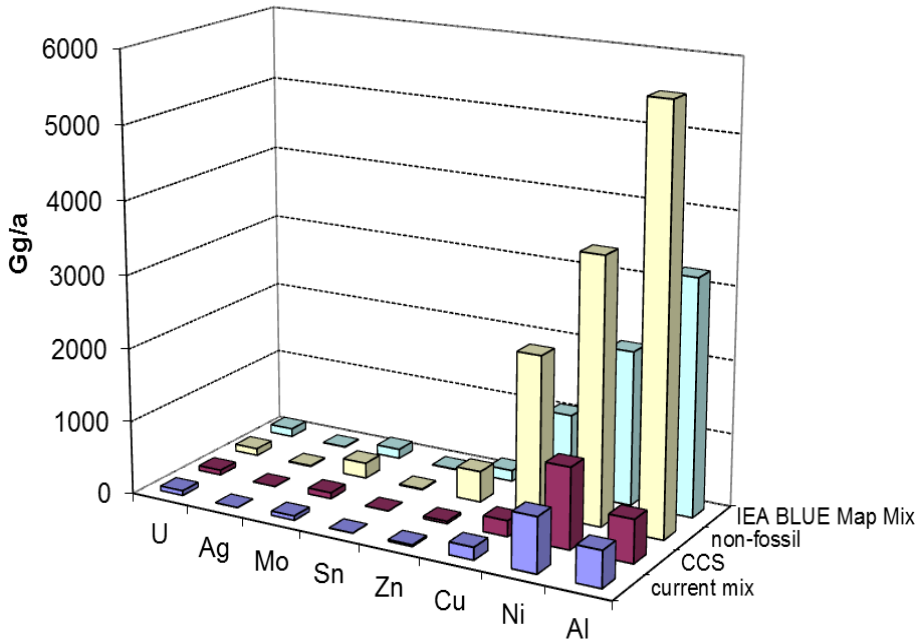


Figure 4-7: Requirements of selected metals in different power-mix cases

4.6 Conclusions and discussion

About 40% of global CO₂ emissions originates from the production of power. In this paper, we have analyzed to what extent these emissions can be reduced, by the use of low-carbon technologies (CCS, nuclear and renewables) and what the consequences would be with regard to the metal requirements. All three electricity mixes presented here (CCS, non-fossil and IEA BLUE Maps) result in a reduction of about 80-90% of CO₂ emissions, if comparable reductions would be achieved in other sectors the 450-490 ppm stabilization goals could be realizable. However, in all three cases presented here this comes at a cost of higher metal requirement.

The addition of CCS to the current electricity mix, would influence the annual demand for nickel and molybdenum substantially. Applying CCS requires 10 to 30% percent more metals than the current electricity mix (Figure 4-8). This is a result of the additional infrastructure that is needed to capture, transport and store CO₂ (specialty steels), in combination with a reduced efficiency of the power plants.

Metal requirements power generation

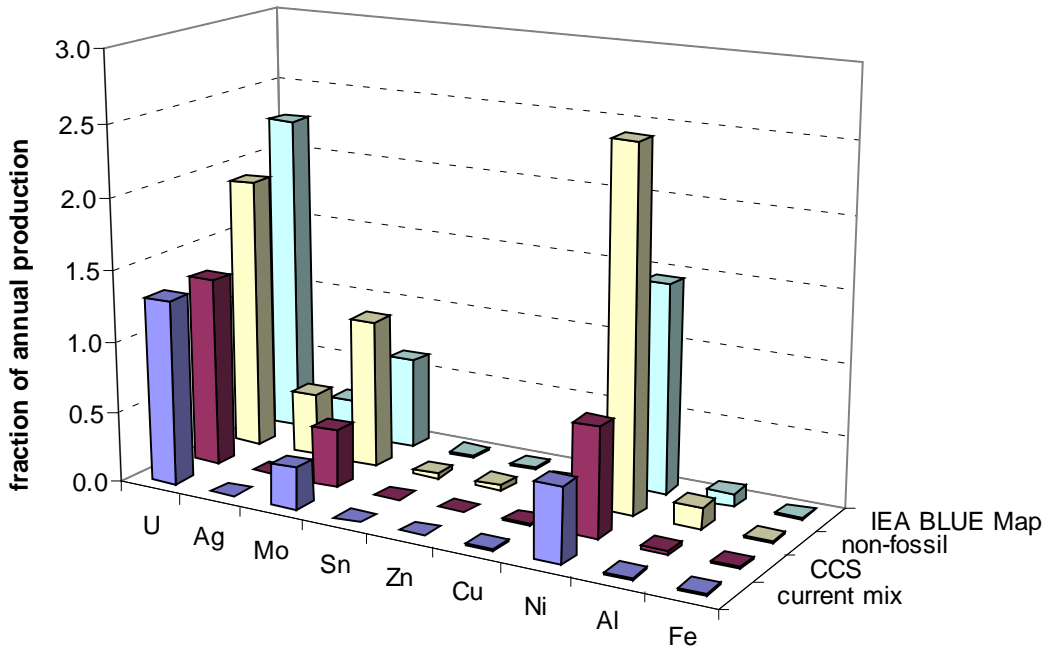


Figure 4-8: Requirements of selected metals in different power mix cases compared with world annual mine production of these metals.

The switch to a non-fossil electricity mix would result in a much higher demand for nickel, uranium, silver, molybdenum and, to a lesser extent, copper and aluminum. For PV-solar, non-waste biomass and wind the increase in metal use ranges from a few percent to a factor thousand. This means that mining of these metals would have to be scaled up considerably in order to fulfill the demand for these new electricity technologies (Figure 4-8). Not all non-fossil technologies are more metal intensive than fossil fuel based power. Nuclear power, hydropower and waste biomass have a relatively low metal intensity. PV-solar, non-waste biomass and wind, however, are much more metal intensive than the current mix. For PV-solar and wind the increase is related to the relatively high metal intensity of PV solar cells and wind turbines. For non-waste biomass it is related to the need for relatively material intensive agricultural processes including the production of agricultural machines and the production of fertilizers.

The last couple of decades a trend of decreasing material intensity per unit of GDP produced has been found in many developed countries (Moll et al. 2005; van der Voet et al. 2005). However, when climate change forces these economies to switch to alternative energy sources, for the energy sector, this trend is broken.

The type of material demand in different technologies depends strongly on the specific technologies that are chosen. For example, the extremely high demand for silver in solar electricity is related to the choice for mono-crystalline silicon PV cells. However, other PV solar technologies have material demand issues of their own (Kleijn and van der Voet 2010b; Wadia et al. 2009). Current thin film CdTe and CIGS will run into scarcity issues long before they will contribute significantly to the global power generation (Kleijn and van der Voet 2010a). The 2 MW off-shore wind turbine with a geared generator that we used in this study does not require neodymium based permanent magnets. However, the new, more efficient and low-maintenance direct-drive turbines use about 150 kg Nd per MW (Polinder et al. 2006; Kleijn and van der Voet 2010a). Scaling up these technologies to the level of tens of GW would require a dramatic increase in the production of this rare earth metal.

Next to PV solar, wind and biomass electricity other renewable technologies like ocean renewables and PV thermal are available as well. Some first results show that ocean renewables have an even higher metal intensity than the technologies discussed here. The amount of iron needed in the equipment itself (excluding the life-cycle) for wave and tidal energy is between 8 and 10 g/kWh (Kluts 2009), which is four to five times as high as the life-cycle iron intensity for wind turbines.

We did not analyze any changes in the grid related to the different technologies. However, it is clear that the CCS options would require little or no changes to existing transmission and distribution infrastructure, while the large scale introduction of PV and wind would require substantial changes in the electricity infrastructure. Roof PV relocates electricity production to the electricity consumers and it will thereby reduce the transmission load in the network. In contrast, centralized PV and wind power, especially off-shore, will relocate and probably increase the infrastructure needed for transmission. This will increase the metal requirements of these technologies considerably, especially for copper and aluminum.

The analysis presented here is a static analysis in which the dynamics of the transition to a low-carbon electricity system are not discussed. However, if climate goals are to be met a fast transition to a low-carbon power sector is needed. If the power sector will be transformed in the next two or three decades, based on current technologies, it is clear that this will cause a significant peak in metal demand. Uncertainties about the long term climate policy and technology choices will make it difficult for mining companies to anticipate such a peak. Further research is needed to explore the dynamics of the metal demand connected to the energy transition.

In this work we only looked at the electricity sector. However, the energy transition will also lead to increased material demand in other sectors. One of the most important ones will be the automotive sector. Hybrids and plug-in hybrids, full electric vehicles and fuel cell vehicles will all require metals in high tech parts like batteries, electro motors (including permanent magnets) and fuel cells (Kleijn and van der Voet 2010b). At the same time the introduction of these vehicles will considerably increase the demand for electricity.

Whether or not material requirements induce material scarcity will depend on a host of things, but specifically also on the possibilities for substitution (Goeller and Weinberg 1976; Ayres 2007). In many of the technologies described here, material substitution may potentially reduce the requirement of specific metals. Silver in PV-solar cells might be replaced by other metals. PV solar cells can be made on a completely new basis e.g. FeS cells. Nickel and molybdenum containing steels might be replaced by steels containing other alloys or by new strong and inert composite materials. Concrete might be used to substitute for the steel towers of wind turbines. Aluminum can substitute copper as a conductor. Extensive agriculture which produces high cellulosic biomass might substitute for the highly intensive oil producing agriculture. However, there is a limit to which this substitution is possible. It is not likely that completely new carbon based materials will replace basic materials like steel and other metals in the near future. There is a limited number of elements available and at the moment almost all of them have useful applications. Shifting from one to the other will therefore in many cases simply shift the problems of material availability from one sector to another. In addition, substitution that is forced by looming scarcity – in contrast to substitution induced by product improvement – could very well slow down the energy transition and reduce overall efficiency, as material choices are forced by scarcity and the technically “optimal” solutions cannot reach their full potential.

Energy and mining are linked to each other in two directions: not only are materials needed for building (new) energy infrastructures but, the other way around, huge amounts of energy are needed during mining, reduction and refining of metals. Increased mining will lead to additional energy use. Dwindling ore grades and the use of less accessible resources will increase energy demand per kg of metal (Norgate 2010). This will result in considerably higher CO₂-emission levels providing a less optimistic picture of GHG benefits of low-carbon energy pathways.

Until now technological developments in mining and processing of metals have more than compensated for the dwindling ore grades and increasing demand, keeping metal prices relatively low (Radetzki et al. 2008; Radetzki 2008; Gordon 2009; Solow 1974). The peaks we have seen in metal prices in the past can almost always be explained by peaks in demand that outpaced the capability miners and processors to increase supply. However, there are indications that the latest mismatch between demand and supply, the 2002–2008 metal boom, was at least partly caused by more fundamental problems at the supply side (Mudd 2010; Humphreys 2010).

The transition to a sustainable energy system is a prerequisite for a sustainable future but there are hurdles, some of which are not that obvious. In the end, changing the world's energy system to reduce GHG-emissions is a huge operation with huge implications for the world's material system as well. There are all kinds of feedback mechanisms and dynamics involved that make it difficult to oversee all implications. This paper shows, at least, that using diffuse energy sources instead of concentrated sources substantially increases metal requirements for harvesting the energy. It also

shows that adding emission reduction technologies to the existing fossil fuel based energy systems increases metal requirements, be it to a lesser extent. Whatever the future energy system will look like, at least we can be sure that the days of “easy”, i.e. material-extensive, are over. It is very important to explore all the implications of such a change to support the transition to a new energy system, in order to make it a sustainable system and catch any drawbacks in an early stage.

References

- Ayres, R. U. 2007. On the practical limits to substitution. *Ecological Economics* 61(1): 115-128.
- Fluor and Statoil. 2005. *Study and Estimate for CO₂ Capture Facilities for the proposed 800 MW Combined Cycle Power Plant -Tjeldbergodden, Norway* CB2005-0022
- Fouquet, R. 2008. *Heat, Power and Light*. Cheltenham: Edward Elgar.
- Frischknecht R., A. H.-J., Doka, G., Dones, R., Heck T., Hellweg, S., Hischier, R., Jungbluth N., Nemecek, T., Rebitzer, G., Spielmann, M. 2007. *Overview and Methodology. Final report ecoinvent v2.0 No. 1*. Duebendorf, CH.: Swiss Centre for Life Cycle Inventories.
- Global Wind Energy Council. 2009. Global wind power boom continues despite economic woes. [http://www.gwec.net/index.php?id=30&no_cache=1&tx_ttnews\[tt_news\]=247&tx_ttnews\[backPid\]=4&cHash=1196e940a0](http://www.gwec.net/index.php?id=30&no_cache=1&tx_ttnews[tt_news]=247&tx_ttnews[backPid]=4&cHash=1196e940a0). Accessed February 7, 2010 2010.
- Global Wind Energy Council. 2010. Large scale integration of wind energy into electricity grids. <http://www.gwec.net/index.php?id=146&L=0>. Accessed.
- Goeller, H. E. and A. M. Weinberg. 1976. The Age of Substitutability. *Science* 191(4228): 683-689.
- Gordon, R. L. 2009. Hicks, Hayek, Hotelling, Hubbert, and Hysteria or Energy, Exhaustion, Environmentalism, and Etatism in the 21st Century. *Energy Journal* 30(2): 1-16.
- Guang, Y. and H. Wenjie. 2010. The status quo of China's nuclear power and the uranium gap solution. *Energy Policy* 38(2): 966-975.
- Hammond, G. P., S. S. O. Akwe, and S. Williams. 2011. Techno-economic appraisal of fossil-fuelled power generation systems with carbon dioxide capture and storage. *Energy* 36(2): 975-984.
- Heijungs, R. 2010. CMLCA: Scientific Software for LCA <http://www.cmlca.eu/>. Accessed February 8, 2010.
- Humphreys, D. 2010. The great metals boom: A retrospective. *Resources Policy* 35(1): 1-13.
- International Atomic Energy Agency. 2009. *Nuclear Technology Review*. Vienna: IAEA.
- International Energy Agency. 2008. *Energy Technology Perspectives*. Paris: EIA.
- International Energy Agency. 2009a. *World Energy Outlook 2009*. Paris: IEA.
- International Energy Agency. 2009b. IEA Statistics Online. <http://www.iea.org/stats/>. Accessed February 2, 2010.
- International Energy Agency. 2009c. *CO₂ emission from fuel combustion, 2009 edition, Highlights*. Paris: IEA.
- Kammen, D. M. and S. Pacca. 2004. Assessing the costs of electricity. *Annual Review of Environment and Resources* 29(1): 301-344.
- Kintisch, E. 2010a. Other Siting Problems. *Science* 329(5993): 789-.
- Kintisch, E. 2010b. Out of Site. *Science* 329(5993): 788-789.
- Kleijn, R. and E. van der Voet. 2010a. Resource constraints in a hydrogen economy based on renewable energy sources. *Renewable and sustainable energy reviews* 14(xxx).

- Kleijn, R. and E. van der Voet. 2010b. Resource constraints in a hydrogen economy based on renewable energy sources: An exploration. *Renewable and sustainable energy reviews* 14(9): 2784-2795.
- Kluts, I. 2009. Material use of ocean renewable energy technologiethesis, CML, Leiden University.
- Kramer, G. J. and M. Haigh. 2009. No quick switch to low-carbon energy. *Nature* 462(7273): 568-569.
- Lior, N. 2008. Energy resources and use: The present situation and possible paths to the future. *Energy* 33(6): 842-857.
- MacKay, D. J. C. 2009. *Sustainable Energy - Without the hot air*. Cambridge: UIT Cambridge Ltd.
- Metz, B., O. R. Davidson, P. R. Bosch, R. Dave, and L. A. Meyer, eds. 2007. *Technical Summary. In: Climate Change 2007: Mitigation. Contribution of Working Group III to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change*. Edited by IPCC. New York: Cambridge University Press.
- Moll, S., S. Bringezu, and H. Schütz. 2005. *Resource use in European countries*. Wuppertal: Wuppertal Institute.
- Mudd, G. M. 2010. The Environmental sustainability of mining in Australia: key mega-trends and looming constraints. *Resources Policy* In Press, Corrected Proof.
- Norgate, T. E. 2010. Deteriorating ore resources. In *Linkages of Sustainability*, edited by T. E. Graedel and E. v. d. Voet. Cambridge, MA: MIT Press.
- Odeh, N. A. and T. T. Cockerill. 2008. Life cycle GHG assessment of fossil fuel power plants with carbon capture and storage. *Energy Policy* 36(1): 367-380.
- Polinder, H., F. A. van der Pijl, G.-J. de Vilder, and P. J. Tavner. 2006. Comparison of Direct-Drive and Geared Generator Concepts for Wind Turbines. *IEEE Transactions on energy conversion* 21(3): 8.
- Radetzki, M. 2008. *A Handbook of Primary Commodities in the Global Economy*. Cambridge UK: Cambridge University Press.
- Radetzki, M., R. G. Eggert, G. Lagos, M. Lima, and J. E. Tilton. 2008. The boom in mineral markets: How long might it last? *Resources Policy* 33(3): 125-128.
- Ramezan, M. and T. J. Skone. 2007. *Carbon Dioxide Capture from Existing Coal-Fired Power Plants*. DOE/NETL-401/110907. National Energy Technology Laboratory.
- Raugei, M. and P. Frankl. 2009. Life cycle impacts and costs of photovoltaic systems: Current state of the art and future outlooks. *Energy* 34(3): 392-399.
- REN21. 2009. *Renewables Global Status Report 2009 update*. Paris: Renewable Energy Policy Network for the 21st century.
- Schiermeier, Q., J. Tollefson, T. Scully, A. Witze, and O. Morton. 2008. Energy alternatives: Electricity without carbon. *Nature* 454(7206): 816-823.
- Solow, R. M. 1974. The Economics of Resources or the Resources of Economics. *American Economic Review* 64(2): 1.
- Spath, P. L. and M. K. Mann. 2004. *Biomass Power and Conventional Fossil Systems with and without CO₂ Sequestration – Comparing the Energy Balance, Greenhouse Gas Emissions and Economics*. NREL/TP-510-32575. National Renewable Energy Laboratory.
- U.S. Energy Information Administration. 2010. Electric Power Industry 2008: Year in Review. http://www.eia.doe.gov/cneaf/electricity/epa/epa_sum.html. Accessed February 8, 2010.
- U.S. Geological Survey. 2010. *Mineral Commodity Summaries 2010*. U.S. Geological Survey.
- van der Giesen, C. 2008. Metals Matter, Assessing life cycle material demands of carbon capture and storage MSc thesis, Institute of Environmental Sciences (CML), Leiden University, Leiden.

Chapter 4

- van der Voet, E., L. van Oers, S. Moll, H. Schütz, S. Bringezu, S. de Bruyn, M. Sevenster, and G. Warringa. 2005. *Policy Review on Decoupling: Development of indicators to assess decoupling of economic development and environmental pressure in the EU-25 and AC-3 countries*. Leiden: Institute of Environmental Sciences (CML), Leiden University
Wuppertal Institute for Climate, Environment and Energy
CE Solutions for Environment, Economy and Technology
- Wadia, C., A. P. Alivisatos, and D. M. Kammen. 2009. Materials Availability Expands the Opportunity for Large-Scale Photovoltaics Deployment. *Environmental Science & Technology* 43(6): 2072-2077.