



Universiteit
Leiden
The Netherlands

Large microplastic particles in sediments of tributaries of the River Thames, UK-Abundance, sources and methods for effective quantification

Horton, A.A.; Svendsen, C.; Williams, R.J.; Spurgeon, D.J.; Lahive, E.

Citation

Horton, A. A., Svendsen, C., Williams, R. J., Spurgeon, D. J., & Lahive, E. (2017). Large microplastic particles in sediments of tributaries of the River Thames, UK-Abundance, sources and methods for effective quantification. *Marine Pollution Bulletin*, 114(1), 218-226. doi:10.1016/j.marpolbul.2016.09.004

Version: Not Applicable (or Unknown)

License: [Leiden University Non-exclusive license](#)

Downloaded from: <https://hdl.handle.net/1887/73688>

Note: To cite this publication please use the final published version (if applicable).

Large microplastic particle in sediments of tributaries of the River Thames, UK – abundance,
sources and methods for effective quantification

Alice A. Horton^{a*}, Claus Svendsen^a, Richard J. Williams^a, David J. Spurgeon^a, Elma Lahive^a

*Corresponding author email address: alihort@ceh.ac.uk (A. A. Horton)

^a Centre for Ecology and Hydrology, Maclean Building, Benson Lane, Crowmarsh Gifford, Wallingford,
OX10 8BB, UK

Keywords: Microplastics; freshwater; sediment; sources; pollution; Raman

Highlights

- Microplastics found at four sites in the Thames River Basin, UK.
- Many fragments derived from road marking paints - a previously undescribed source.
- Efficient methods developed for separating large microplastic particles from sediment.
- Inputs and behaviour of microplastics are varied and complex to predict.

Abstract

Sewage effluent input and population were chosen as predictors of microplastic presence in sediments at four sites in the River Thames basin (UK). Large microplastic particles (1 mm – 4 mm) were extracted using a stepwise approach to include visual extraction, flotation and identification using Raman spectroscopy. Microplastics were found at all four sites. One site had significantly higher numbers of microplastics than other sites, average 66 particles 100 g⁻¹, 91% of which were fragments. This site was downstream of a storm drain outfall receiving urban runoff; many of the fragments at this site were determined to be derived of thermoplastic road-surface marking paints. At the remaining three sites, fibres were the dominant particle type. The most common polymers identified included polypropylene, polyester and polyarylsulphone. This study describes two major new findings: presence of microplastic particles in a UK freshwater system and identification of road marking paints as a source of microplastics.

Capsule

This study is the first to quantify microplastics of any size in river sediments in the UK and links their presence to terrestrial sources including sewage and road marking paints.

1. Introduction

Since the 1960s plastics have become widely manufactured and used, with global production of plastics reaching 311 million tonnes in 2014, 59 million tonnes of which were produced in Europe (PlasticsEurope, 2016). However, only 17.9 million tonnes were recycled or used in energy recovery processes in Europe in 2014 (PlasticsEurope, 2016). Their inherent durability and longevity which make plastics such a favourable commercial material are also the characteristics that allow them to persist in the environment (Barnes et al., 2009). Degradation of large plastic items can be a very slow

process therefore plastics may persist in the environment over long timescales (Andrady, 2011; Hidalgo-Ruz et al., 2012), even in the range of hundreds of years (Barnes et al., 2009). However, despite the wide-ranging use and disposal of plastic products and the recognised abundance of plastic litter worldwide, the importance of understanding the fate and impacts of these plastics within the environment has only recently started to be addressed.

Microplastics, plastic particles <5mm in size, are a specific concern given their small scale and potential for widespread environmental dispersal. The first reports of synthetic fibres and pellets as marine environmental contaminants emerged in the early 1970s (Buchanan, 1971; Carpenter and Smith, 1972), however direct research into this field was not pursued until the last decade (Thompson et al., 2004). Since then, a growing number studies have investigated the presence and effects of marine microplastic debris (Arthur and Baker, 2011; Faure et al., 2012; Law et al., 2014; Lusher et al., 2015; Van Cauwenberghe and Janssen, 2014). The majority of plastic debris found in the marine environment (70-80%) has land-based sources and rivers are considered an important medium for transfer of this debris (Arthur and Baker, 2011; Bowmer and Kershaw, 2010; Hirai et al., 2011; Jambeck et al., 2015; Sadri and Thompson, 2014; Wagner et al., 2014; Zbyszewski and Corcoran, 2011; Zbyszewski et al., 2014). Comparatively few studies have actually been published on microplastics in freshwater or terrestrial environments, although this field of research is growing with a number of papers recently published on microplastics in freshwater systems (Corcoran et al., 2015; Klein et al., 2015; Lechner et al., 2014; Sanchez et al., 2014; Zbyszewski and Corcoran, 2011; Zbyszewski et al., 2014), with the greatest proportion of microplastic debris in freshwater environments being observed near to industrialised areas (Dubaish and Liebezeit, 2013; Eriksen et al., 2013; Sadri and Thompson, 2014; Zbyszewski and Corcoran, 2011).

Microplastics fall into 2 categories: primary and secondary. Primary microplastics are those which were manufactured with the intention of them being of a micro scale, for example those used in cosmetics or exfoliating scrubs (such as glitter and 'microbeads') or virgin pellets used in the

1 plastic production industry. Secondary microplastics are those that have formed as a result of
2 macroplastic degradation, for example breakdown of *in situ* litter (Andrady, 2011; Barnes et al.,
3 2009; Rillig, 2012; Shah et al., 2008) or the washing of artificial fabrics in the laundry, which can lead
4 to the loss of up to 1900 fibres into wastewater per wash (Browne et al., 2011). Within these
5 categories, microplastics are categorised into 2 size brackets: 'large microplastic particles' (LMPP, 1
6 mm-5 mm) and 'small microplastic particles' (SMPP, < 1 mm). Over time, LMPPs may become SMPPs
7 or even nanoplastics, due to degradation within the environment (Andrady, 2011; Koelmans et al.,
8 2015; Lambert and Wagner, 2016).

19 Sources of microplastic particles to the environment are numerous and varied. Sewage
20 treatment works (STWs) are a critical link in the microplastic transport and distribution web given
21 that many plastic particles including microbeads and synthetic fibres will enter these STWs. If not
22 physically filtered out within the plant itself then they will be discharged to rivers via effluent or
23 incorporated into sludge (Habib et al., 1996; Zubris and Richards, 2005). Sludge may in turn may be
24 applied to agricultural land (DEFRA, 2012), leading to direct terrestrial implications, in addition to
25 potential for runoff into watercourses. STW outfalls discharge directly into rivers representing a
26 point source discharge of particles to freshwater environments. Thus, sewage outfalls have been
27 recognised as a likely significant source of microplastic pollution to the oceans (Arthur and Baker,
28 2011; Browne et al., 2011). Additional sources include degradation of macroplastic debris such as
29 sanitary waste from sewage treatment overflows, plastic packaging, particle runoff from roads in the
30 form of tyre wear particles or parts of vehicles and runoff from land containing degraded litter
31 (Andrady, 2011; Eriksen et al., 2013; Galgani et al., 2015; Hidalgo-Ruz et al., 2012). Another source
32 was recently recognised in the form of polymer composite paints. Due to the low polymer
33 composition of paints, these are likely to be more brittle than pure polymers and therefore break
34 down quickly into smaller particles in the environment (Imhof et al., 2016; Song et al., 2014;
35 Takahashi et al., 2012).

The aim of this study was to investigate the presence, abundance and types of microplastics within tributaries of the River Thames basin (UK). This study investigated the link between two expected and related drivers of microplastic input, sewage effluent input and population density, with the presence of microplastics in river sediments. The River Thames catchment in the UK was selected as the location for our survey as it is the UK's second longest river and the river basin supports many large urban areas, receiving effluent from a population of over 13 million (Bengtson Nash et al., 2006; National Statistics, 2002). Although likely acting as a source of microplastics to the marine environment, the Thames also has the capability to act as a sink for some plastic particles due to flow dynamics: in the Thames estuary (and other estuaries), water near the riverbed has a tendency to flow landward, meaning that some of the debris entering the river may be retained within estuarine sediments (Board, 1973). Sediment was our selected medium for analysis given that microplastics can accumulate in sediments at an order of magnitude higher than in the water column (Hoellein et al., 2016). This indicates the potential for rivers to act as a sink for environmental microplastics. Studies of macroplastic in the Thames have shown there to be an abundance of litter being transported down the Thames (Morritt et al., 2014). To our knowledge, however, with the exception of estuaries this is the first study investigating microplastics in the Thames catchment or indeed any freshwater system in the UK.

2. Materials and methods

2.1. Sampling site selection and sample collection

Sampling sites within the Thames river basin were selected based on two variables; average % effluent present in the river as estimated using the Low Flows 2000 (LF2000) WQX (Water Quality eXtension) model (Williams et al., 2009) and population equivalent density as calculated using population within the catchment area (of known area) served by the upstream sewage treatment

works (Pottinger et al., 2013; Williams et al., 2009). Selected sites comprised three tributaries of the Thames: the River Leach, the River Lambourn and The Cut (two sites). These rivers are regularly monitored for a range of water quality and biological characteristics as part of the ongoing Thames Initiative project and are therefore well characterised (Bowes et al., 2014). Four sampling sites were selected to represent scenarios ranging from low sewage input and population equivalent density, Leach (SU228996) and Lambourn (SU429721) through an intermediate site, The Cut site 1 (SU859704, upstream of an effluent outfall) to a site with high sewage input and population equivalent density, The Cut site 2 (SU855732, downstream of an effluent outfall) (Figures 1 and 2). Samples were collected between 28th August and 3rd September 2014 to correspond with seasonal low flow conditions. At each site four sediment samples were collected at 1 m intervals along a 3 m transect running parallel to the bank at 1 m distance, therefore giving four replicate samples per site. The sediment surface was sampled in all cases to approximately 10 cm depth using a stainless steel scoop, collected to fill a 1L glass Kilner jar, ensuring that minimal excess water was retained.

2.2. Sample processing

The sediments were processed in three steps in order to find and separate microplastic particles: 1) visual inspection of whole sample, 2) flotation and 3) further visual inspection of unfloated material. This three-step process was designed to remove microplastic particles with maximum thoroughness and efficiency (without the need for custom-made equipment (Claessens et al., 2013; Imhof et al., 2012)), based on the assumption that each step would not in itself be sufficient to recover all microplastics. To determine whether any of the three steps could be eliminated from future analyses to further streamline the process, the effectiveness of each step for microplastic removal was compared, based on percentage removal of total microplastic particles. As methodological limitations prevent accurate determination of small microplastic particles <1 mm, before undertaking the steps to extract microplastics particles the 1 L sediment samples were each

1 wet-sieved to retain two size fractions, 1-2mm and 2-4mm. These sizes were selected for analysis as
2 indicators of the types and likely sources of microplastics present in this environment while
3 remaining visible and easily quantifiable. Two fractions were specified in order to differentiate
4 between abundances of microplastics of different sizes. Both size fractions from each site were
5 carefully rinsed into individual clean containers and oven-dried at 80°C. This temperature is below
6 the melting point of all common polymers and wouldn't be expected to alter the inherent particle
7 shape considered for the analysis (Kalpakjian and Schmid, 2008). Once dry, samples were weighed
8 and total dry weight calculated, then covered to prevent airborne contamination and stored for
9 sorting and analysis.
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24

25 **2.2.2. Extraction step 1: Visual inspection of sieved sediments**

26

27
28 The first sorting step was a visual inspection of the entire sample using a binocular light
29 microscope at 6x magnification (Wild Heerbrugg, Switzerland, with Photonic PL2000 cold light
30 source), in order to determine to what extent this step could remove all microplastics and
31 potentially eliminate the necessity for flotation in future analyses. For each sample, all sediment
32 from the 2-4mm fraction was inspected for 15 mins and the 1-2mm fraction for 25 mins (subsample
33 of 40 g where the total 1-2 mm size fraction exceeded this). These time frames were found to be
34 sufficient based on the time taken to manually skim through sediment of this size and remove visible
35 microplastic particles from surrounding organic and inorganic matter. In order to be selected, all
36 particles sorted from sediment were required to conform to the following criteria as outlined by Nor
37 and Obbard (2014): no visible cellular or organic structures, particles/fibres are not segmented and if
38 fibres, were equally thick throughout their entire length and should not be tapered at the end. Two
39 additional criteria were specified by Nor and Obbard, however these were considered unsuitable as
40 they would have led to dismissal of likely plastics (homogenously coloured and not shiny) (Nor and
41 Obbard, 2014). Furthermore, based on initial observations these criteria alone were deemed
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

insufficient for identifying all potential microplastic particles and eliminating non-plastics, as many particles in the sample appeared to be anthropogenic in origin while not conforming to the above conditions. In order to avoid missing/misidentifying particles we therefore employed additional measures whereby particles were only identified as microplastics if they also met at least two of the following criteria: 1) unnaturally coloured compared to the majority of other particles in the sample (e.g. bright blue, yellow etc.) and appear to be a homogenous material or texture, 2) unnaturally brightly coloured coating on another particle, 3) unnatural shape e.g. perfectly spherical, 4) fibre that remained intact with a firm tug/poke with tweezers, 5) shiny/glassy, 6) flexible/can be compressed without being brittle. All particles identified as microplastics according to the above criteria were removed and stored for subsequent analysis using Raman spectroscopy.

Particles were identified and quantified as fragments (angular and solid, likely derived of larger items broken down), fibres (likely derived of synthetic textiles) or films (flexible and very thin, likely derived of large packing materials).

2.2.3. Extraction steps 2 and 3: Flotation and visual inspection of sediments post-flotation

Following the initial visual sorting, the remaining material from each sample was transferred to 250ml glass beakers, each filled to approximately 75 ml volume, using a sufficient number of beakers to accommodate the whole sample to allow for separation by flotation. A concentrated ZnCl_2 solution (Bonnymans, UK) was prepared to a concentration of $1.7\text{--}1.8 \text{ kg L}^{-1}$, for use in the flotation. This solution is denser than the plastic particles with the highest expected density in the sediments and should therefore float all plastic particles (e.g. PVC density is $\leq 1.58 \text{ g cm}^{-3}$ (Nuelle et al., 2014), lower than the density of the ZnCl_2 solution, $> 1.7 \text{ g cm}^{-3}$). The concentrated ZnCl_2 solution was poured on top of the sediment in the beaker leaving an approximately 1cm gap to the brim of the beaker. The beaker was then covered with Parafilm® to make a watertight seal, and shaken vigorously for 30 seconds. After settling for 2 hours, the beaker was placed into a larger vessel and

1 the Parafilm® removed and any attached particles rinsed back into the beaker. Additional ZnCl₂
2 solution was gently poured into the beaker allowing the floating particles to overflow into the larger
3 vessel. The outside of the smaller beaker was then rinsed into the overflow container to remove any
4 adhered particles. These shaking and overflow steps were then repeated twice more to maximise
5 the retrieval of the buoyant particles (Claessens et al., 2013). The remaining sediment was stored for
6 further visual inspection. The overflow liquid was vacuum filtered through 1.2 µm Whatman GF/C
7 glass microfibre filter papers (GE Healthcare Life Sciences, UK) to collect floated particles and the
8 filter was then flushed thoroughly with deionised water to remove all traces of ZnCl₂. Given that
9 particles were already size-sieved and > 1 mm, the pore size of these filters allowed for the retention
10 of particles > 1 mm. The filtered particles were then oven-dried on the filter paper at 60°C before
11 analysis. These filtered particles were initially inspected using the binocular light microscope varying
12 between 6-40x magnification (Wild Heerbrugg, Switzerland, with Photonic PL2000 cold light source)
13 to distinguish plastic from non-plastic using the selection criteria outlined above.
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30

31 The third and final step of the process was to visually inspect the material that remained
32 sedimented following the flotation step. This step was included as a precaution to investigate
33 whether dense particles such as polymer-based composites had not been originally observed or
34 floated in the density separation step. The remaining unfloated sediments were rinsed with
35 deionised water and vacuum filtered through 1.2 µm Whatman GF/C glass microfibre filter papers
36 (GE Healthcare Life Sciences, UK) to remove ZnCl₂ residues and visually inspected for 25 mins per
37 sample. Microplastic particles were identified and removed according to the same criteria as before.
38 This final step, allowed the effectiveness of the previous two steps to be assessed for microplastics
39 recovery from sediments.
40
41
42
43
44
45
46
47
48
49
50
51
52
53

54 In order to account for potential handling and airborne contamination three control samples
55 were also run by passing approximately 400-500 ml of the ZnCl₂ solution through the vacuum filter
56
57
58
59
60
61
62
63
64
65

(an equivalent volume to that filtered per field sample) onto 1.2 μm Whatman GF/C glass microfibre filter papers and analysing under the binocular light microscope for contamination.

2.3. Sample analysis: Raman spectroscopy

Given the large number of particles extracted overall, 20% of particles were subsampled for chemical characterisation using Raman spectroscopy (HR800UV, Jobin Yvon Horiba, France, with integrated Olympus BX41 microscope). To prevent bias in particle selection, all the particles from each sample were tipped onto a 40 mm by 40 mm grid and a random number generator used to determine the x and y coordinates from which to take each particle (20% total from each sample).

Spectra were acquired at 50x magnification using a near infra-red laser (785 nm) to limit fluorescence and the filter adjusted accordingly with each particle based on colour (to prevent burning or melting of dark coloured particles). Acquisition time was 30 seconds, accumulation 2, grating 600 with the range set to 600-3200 cm^{-1} to ensure the entire fingerprint region was accounted for. Spectra were analysed using BioRad KnowItAll® Informatics System - Raman ID Expert (2015) software using single and multiple component and functional group analyses to compare spectra to a database of known compounds. This software carries out optimised corrections for spectral matching including interdependent corrections of the baseline, intensity distortion and axis shift with further manual correction possible for noise and baseline correction. The software matches each sample spectrum to several potential reference spectra. Sample spectra were compared to matched reference spectra and the most appropriate match was selected based on matching peak wavenumber positions.

2.4 Data analysis

Particle numbers across all the sites were first checked for normal variance structure using a Kolmogorov-Smirnov test. Where non-normal variance structure was found data were log transformed and normality confirmed prior to further analysis. Post-normalisation, analysis of particle numbers, types and sizes across all four sites were carried out using two way analysis of variance (ANOVAs) using site, size fraction and the interaction term as fixed factors. For comparing particle numbers between sites, one way analysis of variance (ANOVA) was used. Where significant differences were found across sites or particle fraction size, a post-hoc Tukey test was used to identify significant differences between conditions.

3. Results

3.1. Sorting method

The three control filters analysed to assess contamination during processing, contained an average of two fibres per filter paper. These may arise from aerial deposition and from clothing. Compared to the number of fibres found across all field samples (578 total, with even the least polluted site, the Leach, containing 69 fibres), this contamination was deemed to be negligible.

In order to determine the effectiveness of the different sorting methods the proportion of particles recovered in each step were compared. The most effective method of particle removal was flotation, which extracted between 51% (The Cut site 1) and 82% (Lambourn) of the total particles removed combining all three steps. In comparison, number of particles removed in the initial timed search by eye was between 16% (The Cut site 1 and Lambourn) and 37% (The Cut site 2) of the total particles. However following steps one (timed search by eye) and two (flotation), 97% of the total number of particles extracted were found for three out of four sites (excluding The Cut site 1). The final step which was a search of sediment post-flotation found less than 3% of the total particles recovered for these three sites. However, for the most polluted site (The Cut site 1) even after these

two steps of the combined method, 34% particles (of total removed overall) remained in the sediment (determined by the third step of a search through sediment post-flotation). Overall an average 75% of the total recovered particles were extracted by initial sorting and flotation, this being 98% Cut site 1 was excluded.

3.2. Particle presence, abundance and size

Microplastic particles were found at all of the sampling sites. There were clear and significant differences in both the number and types found between the four sites (both ANOVA, $p < 0.001$). However the mass of sediment in the 1-4mm size range varied between sites with total dry weights of sediment in the 1-4 mm size fractions being significantly lower in the Leach, Lambourn and Cut 2 samples than those from The Cut site 1 (ANOVA, $p < 0.01$, Tukey, $p < 0.05$). This was due to variation in sediment composition and grain size. For example, total dry weights of sediment between 1-4 mm from the total 1 L sample from the Leach (average 128 g) were less than the Cut site 1 (429 g) due a greater proportion of sediment particles < 1 mm at the Leach (table 1). To standardise between sites for comparability, particle numbers were therefore expressed as a number of microplastic particles per 100 g dry weight of sediment in the 1-4mm size range for both microplastic size fractions and all particle types, and all statistical analysis carried out on these corrected data. Total and corrected numbers are reported in table 1, with significant differences found between sites for both number and types of microplastics following correction for sediment weight (ANOVA, $p < 0.001$, Tukey, $p < 0.05$).

Site was a highly significant factor determining the total number of microplastics particles per 100 g sediment (ANOVA, $p < 0.005$). The highest number of particles was recovered from The Cut site 1, the second most sewage-impacted site, with an average of 66 ± 7.7 particles per 100 g across the four replicates (table 1) found following the three-step extraction method. The high number of

particles recovered here was, however, not significantly different from the most sewage effluent impacted site (The Cut site 2) (average 33.2 ± 16.1 particles per 100 g, Tukey, $p > 0.05$). The lowest numbers of microplastic particles were found at the Leach and Lambourn sites, which had the lowest sewage effluent input and population equivalent density (average 18.5 ± 4.2 particles and 22.1 ± 9.5 particles respectively). Comparisons indicated that total counts from both these sites were significantly lower than the more polluted Cut 1 site (Tukey, $p < 0.05$), but not significantly different from each other (Tukey, $p > 0.05$).

There was a significant difference between the two microplastic particle size fractions found across all sites (ANOVA, $p < 0.005$), with the number of particles in the 1-2 mm fraction consistently being higher on average than in the 2-4 mm fraction (table 1). This difference was consistent across all the sites (ANOVA, $p = 0.142$).

3.3. Type of particles

There was a significant difference between the types of particles found across sites (ANOVA $p < 0.001$). This was due to the significantly lower numbers of films which comprised only 3.3% of particles (average 2.2 particles per 100 g) compared to the other two particle forms (Tukey, $p < 0.05$, table 1). The difference between fragments and fibres was not significant (average 17.2 particles per 100 g, 49.3% overall and average 16.5 particles per 100 g, 47.4% overall respectively, Tukey, $p > 0.05$).

Site significantly influenced the types of particles found (ANOVA $p < 0.001$). The Cut site 1 was significantly different from all other sites in that the dominant type of particles (Tukey, $p < 0.05$) found at this location were fragments, comprising 80.8% of particles (corrected for sediment weight, Fig. 3). Fibres were the most abundant particle type at all other sites, although there were no significant differences between the numbers of fibres found between sites (Tukey, $p > 0.05$, table 1).

Films were the least abundant particle type and showed no significant differences in abundance between sites (Tukey, $p > 0.05$, table 1).

Analysis of fragments from The Cut site 1 identified a specific particle form that was not observed at any of the other sites. These unique fragments were red and yellow and were often found to incorporate glass beads (which themselves were also found independently). As non-plastics these glass beads were not included in overall site microplastic counts, however their presence was observed in all samples from this site. Shards of glass were also easily identifiable due to their brittle nature and were not counted.

3.4. Plastic types

A total of 336 particles (20% total) were analysed using Raman spectroscopy with BioRad KnowItAll® Informatics System - Raman ID Expert (2015) software to determine their chemical composition. The particles chosen were evenly distributed across all samples and size fractions. Of the particles analysed, many could not be identified due to poor quality spectra (due to fluorescence/lack of identifiable peaks), or a spectrum was present but was not recognised either using the KnowItAll software or by eye. Therefore 111 out of 335 (33%) particles could be identified to chemical composition.

Of these 111 identifiable particles, eight (7%) were found to be natural substances such as shell or organic matter, while the other 103 (93%) were of anthropogenic origin. The majority of these spectra (62%) related to dyes, as opposed to the plastic materials in which they are impregnated (Fig. 4). Dyes detected included those commonly added to plastics and plastic composites, including copper phthalocyanine, mortoperm blue, hostasol green and chrome yellow (Clariant International Ltd, 2011; Imhof et al., 2016; Lewis, 2005; Okazaki and Suzuki, 1976; Van Cauwenberghe and Janssen, 2014; Van Cauwenberghe et al., 2013). A total of 34 analysed particles

could be identified specifically to their polymer composition. The types of polymer identified were polyester/polyethylene terephthalate (PET, 14 particles) polypropylene (PP, five particles), polyarylsulphone thermoplastic (five particles), polyethylene (PE, two particles), polystyrene (PS, one particle), and poly vinylchloride (PVC, one particle). Additional polymers found include polycarbonate and composites such as acrylonitrile/PMMA thermoplastic blend and polyurethane/resin composite; these were all grouped under 'other polymers' (Fig. 4).

4. Discussion

In terms of quantification method evaluation, the initial sorting and flotation steps combined successfully removed 75% of microplastic particles with the other 25% remaining in the residual sediment. Recovery would have been at 98% if the particles at The Cut site 1 were excluded, as 34% of these could not be floated due to their dense nature. However an initial manual sort by hand and microscope through an amount of dry sediment alone appears to be ineffective, as a maximum of 37% particles were removed in this sorting step. Many of the microplastics manually sorted would also be expected to float, therefore this suggests that flotation is the most effective method for removing microplastics from river sediments, with a subsequent sort through the remaining sediment post-flotation to remove dense particles. Given the thorough stepwise process of particle extraction, it was considered that these steps carried out in succession were successful in removing all microplastic particles from the sediment. However, for efficiency, the initial pre-flotation search cannot be considered fully effective on its own and may be eliminated as it can be assumed that all particles removed in this step would be extracted in the following two steps. The presence of these dense microplastics present in the unfloated fraction highlights the complexity of microplastics as an environmental contaminant; these will often likely be polymer-based composites and therefore will not behave as the pure polymer would be expected to. This stepwise methodology works to extract particles even from complex sediment samples in a cost-effective

manner. It is necessary to carry out multiple steps of particle extraction to account for dense particles therefore the suggested protocol for future samples would be to carry out a flotation using a concentrated ZnCl_2 solution, followed by a timed manual sort of the remaining sediment to remove any unfloated plastic particles.

This study shows for the first time in the UK that microplastics are present in river sediments, with microplastic particles observed at all sites including both urban and rural locations. Despite being the second most anthropogenically influenced in terms of effluent input and population equivalent density, the highest sediment microplastic burden was found at The Cut site 1 (although not significantly different from the more highly effluent polluted Cut site 2, Fig. 3). The dominant type of particle at this site was fragments, as opposed to fibres at the other three sites. Hence at this site there is the indication of a source of fragment additional to the sources at the other three sites. The characteristics and chemical nature of particles found (e.g. predominantly coloured, angular fragments) suggest that many of these particles found were locally-derived secondary microplastics rather than primary microplastics from consumer products or secondary artificial fibres introduced by sewage effluent. Factors contributing to the relatively high plastic fragment input at The Cut site 1 are likely to be the presence of a storm drain immediately upstream from the sampling location carrying local urban runoff to the watercourse and the urban nature of the site, on the outskirts of a large town. This implies that, at this site, runoff rather than sewage effluent is the dominant input. The high sewage-based input at The Cut site 2 may be reflected in it having the highest number of fibres when calculated per 100 g (Fig. 3).

Fragments and fibres were both found in significant numbers, with fragments dominating the particles found at the Cut site 1 and fibres being the dominant particle type at the other three sites. Films were found only at low numbers. The abundance of fibres at all sites suggests the influence of sewage effluent, even for the Leach where there is only one upstream STW and negligible effluent input (Fig. 2). Given that there were still a considerable number of particles found

1 at this site there may be an alternative anthropogenic influence, for example airborne
2 contamination (Peters and Bratton, 2016) or agricultural runoff (e.g. from plastic mulching) (Rillig,
3 2012). With UK policy of significant amounts of sewage sludge applied to land in the UK (80% of all
4 sludge) (DEFRA, 2012), it is possible that such fibres may be derived from sludge applied to
5 surrounding arable land entering the watercourses via runoff. Runoff from septic tank systems may
6 also be a source (Butler and Payne, 1995).
7
8
9
10
11
12
13
14

15 Of the particles remaining unfloated throughout the sorting process, a number were
16 identified to be dense composites of road-marking paints, aggregates, a painted coating on a dense
17 particle or high density mineral-polymer mixtures (Corcoran et al., 2015). These materials are
18 composites of polymer resin, thermoplastic, bitumen and pigment (often with incorporated glass
19 beads for reflectivity) (Conserva and Dupont, 2011; National Association of City Transportation
20 Officials, 2014). In addition, key features of the particles identifying road markings as a source
21 include their colour (predominantly red and yellow), incorporated glass beads and site location
22 downstream of the storm drain input. Raman analysis showed many of these particles to contain
23 dyes, for example many yellow particles contained chrome yellow, a yellow pigment commonly
24 added to thermoplastic road marking paints (Okazaki and Suzuki, 1976). To confirm this
25 identification as road-derived particles, particles were collected from road surfaces upstream of the
26 Cut site 1 storm drain. Visual inspection and Raman analysis showed that particles collected directly
27 from road-based coatings and paints matched those extracted from the sediment samples (Fig. 5).
28 Some of these particles appeared to be partially coated in paint indicating that some of the coating
29 had degraded and highlighting the potential for small particles to degrade further. The incorporated
30 glass beads observed, which are lost to the environment with wear and were also observed
31 independently in samples, do not fit the definition of microplastics (Kemsley, 2010).
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55

56 Polymers give a weak Raman scatter and therefore an incorporated dye is likely to override
57 the polymer spectrum (Imhof et al., 2016; Smith and Dent, 2005). Given the strong dye spectra
58
59
60
61
62
63
64
65

1 observed in many of the coloured particles, and lack of other peaks, it can therefore be inferred that
2 the particles identified as pigments are all dyed polymers or polymer composites (Van
3 Cauwenberghe and Janssen, 2014; Van Cauwenberghe et al., 2013). Unidentifiable particles were
4 also inferred to be plastics as fluorescence is a common problem when analysing polymer particles
5 using Raman spectroscopy (Löder and Gerdt, 2015). For the purpose of this study, paints, pure
6 polymers and composites were all considered as microplastics as per Song et al (2014), although
7 some authors will distinguish 'micropaints' and microplastics separately due to varying polymer
8 composition (Imhof et al., 2016). However as all polymers are composites to some extent
9 (containing fillers, pigments and plasticisers) very few environmental plastics will be 'pure' polymers;
10 there is currently no threshold of polymer content to distinguish between pigmented polymer and
11 polymer incorporated within a paint.
12
13
14
15
16
17
18
19
20
21
22
23
24

25
26 Previous marine studies have identified plastic pellets associated with tarry residues or
27 attached to tar-based substances (Gregory, 1983). The observations of road-derived particles here
28 indicate that materials similar in nature are also entering river systems and may add another aspect
29 to microplastic presence and behaviour in this environment. It has previously been noted that
30 microplastics can be transported via road surface runoff originating from degraded litter, pieces of
31 car-related debris such as bumpers or hubcaps, tyre wear particles (Browne et al., 2010; Eriksen et
32 al., 2013; Galgani et al., 2015; Tibbetts, 2015), however to our knowledge this is the first study to
33 note the presence of microplastics derived directly from the road surface and associated markings.
34 Paint particles have previously been found in UK estuarine sediments, however these were not
35 linked to road surface degradation (Takahashi et al., 2012). Little is known about the long term fate
36 and behaviours of these materials in rivers. Such releases are likely to be widespread and difficult to
37 avoid; efforts in infrastructure and civil engineering management would be needed to limit such
38 emissions.
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Using Raman spectroscopy, polymer types including polypropylene, polyethylene, polyvinyl chloride, polyester and polystyrene were found at the sites. These were all expected as these are among the most widely used plastics in consumer products (PlasticsEurope, 2016). Another polymer found in relatively high numbers was polyarylsulphone thermoplastic (Fig. 4), this was found in three out of four sites however was not expected as it is not one of the most commonly used polymers. This polymer has high thermal resistance and is used to replace ceramics and glass in a variety of applications including household goods and electrical equipment (Rosato and Rosato, 2004). One expected polymer, nylon was not observed here, although this does not necessarily indicate its absence at these sites.

These findings highlight the ubiquitous nature of plastic as an environmental pollutant, even in rural areas with no expected significant inputs. The results presented here can be taken as an indicator of microplastic pollution in the Thames Basin. Despite the combination of different sorting methods these are not guaranteed to be without error, given that 7% of particles analysed by Raman were found to be of natural origin. However, this error is far lower than the 70% predicted by Hidalgo-Ruz et al. (2012). To some extent, predictive estimates of microplastic abundances can be made based on known site characteristics (including effluent input and population served by upstream STWs). However, alternative factors are important to take into account when trying to predict microplastic pollution in this size range; other sources such as terrestrial run-off and inputs from storm drains cannot be disregarded. Additional factors to take into consideration include surrounding land use, population density in the area surrounding the sampling site (as opposed to population equivalent served by upstream STWs) and alternative inputs to the watercourse (such as storm drains and drainage ditches).

These results provide evidence of rivers as a source of microplastics to the sea, however the factors influencing presence, abundance and behaviour of microplastics in a riverine environment are complex and difficult to predict. Within a river, sediment transport and dynamics including flow

1 speed and channel depth can control the flow of particles, both natural and artificially produced, *en*
2 *route* from land to ocean (Phillips et al., 2000; Smith et al., 2003). An accurate assessment of
3 microplastics in any environment needs first and foremost knowledge of the range of potential
4 sources, behaviour of particles in the environment and an understanding of the factors that mediate
5 the inputs. Further research needs to be done at these locations to include the small scale particles
6 (<1 mm) and also particles within the water column and on the surface. The density of polymers is
7 an important consideration given that the particles observed in sediment are likely to be of denser
8 polymers; in flowing waters buoyant particles may have been transported downstream before they
9 could become biofouled and dense enough to sink (Andrady, 2011; Van Cauwenberghe et al., 2013).
10 Additional studies and modelling of fate and transport of these particles within river systems need to
11 be carried out in an attempt to better predict where they will end up. It is also highly likely that
12 seasonal changes in river flow will affect the presence and transport of microplastics within riverine
13 systems. Therefore sampling in different weather and seasonal conditions would help develop
14 understanding of the degree to which rivers act as a sink of microplastics and a source to the marine
15 environment.

39 5. Conclusions

40 This study is the first to report relative amounts and types of microplastics present across
41 different locations both in the Thames basin, and also in any low-lying river catchment in the UK.
42 Despite the uncertainties and complexities with predicting and analysing microplastic pollution,
43 microplastics were observed at all sites and inference can be made as to sources. While it is clear
44 that the number and types of microplastics observed in this study are not the entirety of
45 microplastic pollution at these sites, these results give a representative indication of the proportions
46 of plastics between these sites and the factors that influence their presence and abundance,
47 specifically sewage and road-derived input, plus in situ degradation of litter, especially in urban
48

1 areas. The majority of microplastics from this study were deemed to be secondary microplastics i.e.
2 broken down from larger items. To some extent, different types of particles could be attributed to
3 different sources i.e. road surface markings made of thermoplastic composite paints, fibres derived
4 from synthetic textiles and fragments of large litter items such as plastic bottles (polypropylene) and
5 packaging materials (polystyrene). Sewage and effluent input is also a likely significant source given
6 that many of the particles found were fibres, especially in the most polluted sites that receive a high
7 volume of effluent such as those at The Cut sites 1 and 2. However these results indicate that
8 despite the evidence for sewage influences at these sites, in certain locations sewage effluent may
9 be a less significant source of large microplastic particles than direct runoff from land. This study
10 highlights the importance of rivers as a source of microplastics and other anthropogenic litter to the
11 ocean, but also as a sink for dense plastics and anthropogenic particles with potential for
12 environmental and ecological impacts.
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32

33 **Acknowledgements**

34
35 The authors wish to thank Daniel Read and Colin Johnston for their advice on the Raman
36 spectroscopy work, Alexander Walton for his assistance on the fieldwork and Alexander Robinson
37 for his inspired discussions regarding road marking paints. Also Mike Bowes and the Thames
38 Initiative team for their advice on site selection. This work was funded by the UK Natural
39 Environment Research Council through National Capability funding of the Centre for Ecology and
40 Hydrology Pollution and Environmental Risk Program.
41
42
43
44
45
46
47
48
49
50
51
52
53

54 **References**

55
56
57
58
59
60
61
62
63
64
65

Andrady, A.L., 2011. Microplastics in the marine environment. *Marine Pollution Bulletin* 62, 1596-1605.

Arthur, C.D., Baker, J., 2011. Proceedings of the Second Research Workshop on Microplastic Marine Debris, in: Arthur, C.D., Baker, J. (Eds.). NOAA Technical Memorandum NOS-OR&R-39, Tacoma, WA, USA.

Barnes, D.K., Galgani, F., Thompson, R.C., Barlaz, M., 2009. Accumulation and fragmentation of plastic debris in global environments. *Philosophical Transactions of the Royal Society B: Biological Sciences* 364, 1985-1998.

Bengtson Nash, S.M., Goddard, J., Muller, J.F., 2006. Phytotoxicity of surface waters of the Thames and Brisbane River estuaries: a combined chemical analysis and bioassay approach for the comparison of two systems. *Biosensors and Bioelectronics* 21, 2086-2093.

Board, P., 1973. The fate of rubbish in the Thames Estuary. *Marine Pollution Bulletin* 4, 165-166.

Bowes, M.J., Jarvie, H.P., Naden, P.S., Old, G.H., Scarlett, P.M., Roberts, C., Armstrong, L.K., Harman, S.A., Wickham, H.D., Collins, A.L., 2014. Identifying priorities for nutrient mitigation using river concentration–flow relationships: The Thames basin, UK. *Journal of Hydrology* 517, 1-12.

Bowmer, T., Kershaw, P., 2010. Proceedings of the GESAMP International Workshop on micro-plastic particles as a vector in transporting persistent, bio-accumulating and toxic substances in the oceans, in: Bowmer, T., Kershaw, P. (Eds.). UNESCO-IOC, Paris.

Browne, M.A., Crump, P., Niven, S.J., Teuten, E., Tonkin, A., Galloway, T., Thompson, R., 2011. Accumulation of microplastic on shorelines worldwide: sources and sinks. *Environmental Science and Technology* 45, 9175-9179.

Browne, M.A., Galloway, T.S., Thompson, R.C., 2010. Spatial patterns of plastic debris along estuarine shorelines. *Environmental science & technology* 44, 3404-3409.

Buchanan, J., 1971. Pollution by synthetic fibres. *Marine Pollution Bulletin* 2, 23.

Butler, D., Payne, J., 1995. Septic Tanks: Problems and Practice. *Building and Environment* 30, 419-425.

Carpenter, E.J., Smith, K., 1972. Plastics on the Sargasso Sea surface. *Science* 175, 1240-1241.

Claessens, M., Van Cauwenberghe, L., Vandegehuchte, M.B., Janssen, C.R., 2013. New techniques for the detection of microplastics in sediments and field collected organisms. *Marine Pollution Bulletin* 70, 227-233.

Clariant International Ltd, 2011. Green Solutions for Plastics. Clariant Chemicals (India) Limited, India.

Conserva, V., Dupont, M., 2011. Kraton polymers boost functional life of thermoplastic road marking paints. Kraton Polymers LLC, available at: <http://www.kraton.com/products/coatings/docs/road%20marking%20paints.pdf> (accessed 13th October 2015).

Corcoran, P.L., Norris, T., Ceccanese, T., Walzak, M.J., Helm, P.A., Marvin, C.H., 2015. Hidden plastics of Lake Ontario, Canada and their potential preservation in the sediment record. *Environmental Pollution* 204, 17-25.

DEFRA, 2012. Waste water treatment in the United Kingdom – 2012, Implementation of the European Union Urban Waste Water Treatment Directive – 91/271/EEC. Department for Environment, Food and Rural Affairs, London.

Dubaish, F., Liebezeit, G., 2013. Suspended Microplastics and Black Carbon Particles in the Jade System, Southern North Sea. *Water, Air, & Soil Pollution* 224.

Eriksen, M., Mason, S., Wilson, S., Box, C., Zellers, A., Edwards, W., Farley, H., Amato, S., 2013. Microplastic pollution in the surface waters of the Laurentian Great Lakes. *Marine Pollution Bulletin* 77, 177-182.

Faure, F., Corbaz, M., Baecher, H., de Alencastro, L., 2012. Pollution due to plastics and microplastics in Lake Geneva and in the Mediterranean Sea. *Archives des Sciences* 65, 157-164.

Galgani, F., Hanke, G., Maes, T., 2015. Global Distribution, Composition and Abundance of Marine Litter, in: Bergmann, M., Gutow, L., Klages, M. (Eds.), *Marine Anthropogenic Litter*, Springer International Publishing, pp. 29-56.

Gregory, M.R., 1983. Virgin plastic granules on some beaches of eastern Canada and Bermuda. Marine Environmental Research 10, 73-92.

Habib, D., Locke, D.C., Cannone, L.J., 1996. Synthetic Fibers as Indicators of Municipal Sewage Sludge, Sludge Products, and Sewage Treatment Plant Effluents. Water, Air, and Soil Pollution 103, 1-8.

Hidalgo-Ruz, V., Gutow, L., Thompson, R.C., Thiel, M., 2012. Microplastics in the marine environment: a review of the methods used for identification and quantification. Environmental Science and Technology 46, 3060-3075.

Hirai, H., Takada, H., Ogata, Y., Yamashita, R., Mizukawa, K., Saha, M., Kwan, C., Moore, C., Gray, H., Laursen, D., Zettler, E.R., Farrington, J.W., Reddy, C.M., Peacock, E.E., Ward, M.W., 2011. Organic micropollutants in marine plastics debris from the open ocean and remote and urban beaches. Marine Pollution Bulletin 62, 1683-1692.

Hoellein, T., Kelly, J.J., McCormick, A., London, M., 2016. Consider a source: Microplastic in rivers is abundant, mobile, and selects for unique bacterial assemblages, Ocean Sciences Meeting, New Orleans, Louisiana, USA.

Imhof, H.K., Laforsch, C., Wiesheu, A.C., Schmid, J., Anger, P.M., Niessner, R., Ivleva, N.P., 2016. Pigments and plastic in limnetic ecosystems: A qualitative and quantitative study on microparticles of different size classes. Water Research 98, 64-74.

Imhof, H.K., Schmid, J., Niessner, R., Ivleva, N.P., Laforsch, C., 2012. A novel, highly efficient method for the separation and quantification of plastic particles in sediments of aquatic environments. Limnology and Oceanography: Methods 10, 524-537.

Jambeck, J., Geyer, R., Wilcox, C., Siegler, T.R., Perryman, M., Andrady, A.L., Narayan, R., Law, K.L., 2015. Plastic waste inputs from land into the ocean. Science 347, 768-771.

Kalpajian, S., Schmid, S.R., 2008. Manufacturing Processes for Engineering Materials. Pearson Education.

Kemsley, J.M., 2010. Road Markings. Chemical and Engineering News 88, 67.

1 Klein, S., Worch, E., Knepper, T.P., 2015. Occurrence and Spatial Distribution of Microplastics in River
2 Shore Sediments of the Rhine-Main Area in Germany. *Environ Sci Technol* 49, 6070-6076.
3
4 Koelmans, A.A., Besseling, E., Shim, W.J., 2015. Nanoplastics in the Aquatic Environment. *Critical*
5
6 *Review*. 325-340.
7
8
9 Lambert, S., Wagner, M., 2016. Characterisation of nanoplastics during the degradation of
10
11 polystyrene. *Chemosphere* 145, 265-268.
12
13
14 Law, K.L., Moret-Ferguson, S.E., Goodwin, D.S., Zettler, E.R., Deforce, E., Kukulka, T., Proskurowski,
15
16 G., 2014. Distribution of surface plastic debris in the eastern Pacific Ocean from an 11-year data set.
17
18 *Environ Sci Technol* 48, 4732-4738.
19
20
21 Lechner, A., Keckeis, H., Lumesberger-Loisl, F., Zens, B., Krusch, R., Tritthart, M., Glas, M.,
22
23 Schludermann, E., 2014. The Danube so colourful: a potpourri of plastic litter outnumbers fish larvae
24
25 in Europe's second largest river. *Environ Pollut* 188, 177-181.
26
27
28 Lewis, P.A., 2005. *Organic Colorants, Coloring of Plastics*. John Wiley & Sons, Inc., pp. 100-126.
29
30
31 Löder, M.G.J., Gerdts, G., 2015. Methodology Used for the Detection and Identification of
32
33 Microplastics—A Critical Appraisal, in: Bergmann, M., Gutow, L., Klages, M. (Eds.), *Marine*
34
35 *Anthropogenic Litter*. Springer International Publishing, pp. 201-227.
36
37
38 Lusher, A.L., Tirelli, V., O'Connor, I., Officer, R., 2015. Microplastics in Arctic polar waters: the first
39
40 reported values of particles in surface and sub-surface samples. *Scientific Reports* 5, 14947.
41
42
43 Morritt, D., Stefanoudis, P.V., Pearce, D., Crimmen, O.A., Clark, P.F., 2014. Plastic in the Thames: a
44
45 river runs through it. *Marine Pollution Bulletin* 78, 196-200.
46
47
48 National Association of City Transportation Officials, 2014. *Urban Bikeway Design Guide*. Island
49
50 Press.
51
52
53 National Statistics, 2002. *Census 2001: First Results on Population of England and Wales*. Office for
54
55 National Statistics, Newport.
56
57
58 Nor, N.H., Obbard, J.P., 2014. Microplastics in Singapore's coastal mangrove ecosystems. *Marine*
59
60 *Pollution Bulletin* 79, 278-283.
61
62
63
64
65

Nuelle, M.T., Dekiff, J.H., Remy, D., Fries, E., 2014. A new analytical approach for monitoring microplastics in marine sediments. *Environmental Pollution* 184, 161-169.

Okazaki, H., Suzuki, Y., 1976. Thermoplastic Traffic Paint, in: Ltd., S.C.C. (Ed.), United States.

Peters, C.A., Bratton, S.P., 2016. Urbanization is a major influence on microplastic ingestion by sunfish in the Brazos River Basin, Central Texas, USA. *Environmental Pollution* 210, 380-387.

Phillips, J., Russell, M., Walling, D., 2000. Time-integrated sampling of fluvial suspended sediment: a simple methodology for small catchments. *Hydrological Processes* 14, 2589-2602.

PlasticsEurope, 2016. *Plastics - the Facts 2015*. PlasticsEurope, Association of Plastic Manufacturers, Brussels.

Pottinger, T.G., Henrys, P.A., Williams, R.J., Matthiessen, P., 2013. The stress response of three-spined sticklebacks is modified in proportion to effluent exposure downstream of wastewater treatment works. *Aquat Toxicol* 126, 382-392.

Rillig, M.C., 2012. Microplastic in terrestrial ecosystems and the soil? *Environmental Science and Technology* 46, 6453-6454.

Rosato, D.V., Rosato, D.V., 2004. *Reinforced Plastics Handbook* 3rd ed. Elsevier, Oxford, UK.

Sadri, S.S., Thompson, R.C., 2014. On the quantity and composition of floating plastic debris entering and leaving the Tamar Estuary, Southwest England. *Marine Pollution Bulletin* 81, 55-60.

Sanchez, W., Bender, C., Porcher, J.M., 2014. Wild gudgeons (*Gobio gobio*) from French rivers are contaminated by microplastics: preliminary study and first evidence. *Environ Res* 128, 98-100.

Shah, A.A., Hasan, F., Hameed, A., Ahmed, S., 2008. Biological degradation of plastics: a comprehensive review. *Biotechnology Advances* 26, 246-265.

Smith, E., Dent, G., 2005. *Modern Raman Spectroscopy - A Practical Approach*. Wiley, Chichester, UK.

Smith, S., Langland, M., Edwards, R., 2003. *Watershed Sediment Transport*, in: Langland, M., Cronin, T. (Eds.), *A Summary Report of Sediment Processes in Chesapeake Bay and Watershed*. U.S. Geological Survey, Pennsylvania, pp. 34-41.

1 Song, Y.K., Hong, S.H., Jang, M., Kang, J.H., Kwon, O.Y., Han, G.M., Shim, W.J., 2014. Large
 2 accumulation of micro-sized synthetic polymer particles in the sea surface microlayer. *Environ Sci*
 3
 4 *Technol* 48, 9014-9021.
 5
 6 Takahashi, C.K., Turner, A., Millward, G.E., Glegg, G.A., 2012. Persistence and metallic composition of
 7
 8 paint particles in sediments from a tidal inlet. *Mar Pollut Bull* 64, 133-137.
 9
 10 Thompson, R.C., Olsen, Y., Mitchell, R.P., Davis, A., Rowland, S.J., John, A.W.G., McGonigle, D.,
 11
 12 Russell, A.E., 2004. Lost at Sea: Where Is All the Plastic? *Science* 304, 838.
 13
 14 Tibbetts, J.H., 2015. Managing marine plastic pollution: policy initiatives to address wayward waste.
 15
 16 *Environmental health perspectives* 123, A90.
 17
 18 Van Cauwenberghe, L., Janssen, C.R., 2014. Microplastics in bivalves cultured for human
 19
 20 consumption. *Environmental Pollution* 193, 65-70.
 21
 22 Van Cauwenberghe, L., Vanreusel, A., Mees, J., Janssen, C.R., 2013. Microplastic pollution in deep-
 23
 24 sea sediments. *Environmental Pollution* 182, 495-499.
 25
 26 Wagner, M., Scherer, C., Alvarez-Muñoz, D., Brennholt, N., Bourrain, X., Buchinger, S., Fries, E.,
 27
 28 Grosbois, C., Klasmeier, J., Marti, T., Rodriguez-Mozaz, S., Urbatzka, R., Vethaak, A.D., Winther-
 29
 30 Nielsen, M., Reifferscheid, G., 2014. Microplastics in freshwater ecosystems: what we know and
 31
 32 what we need to know. *Environmental Sciences Europe* 26.
 33
 34 Williams, R., Keller, V.D.J., Johnson, A.C., Young, A.R., Holmes, M.G.R., Wells, C., Gross-Sorokin, M.,
 35
 36 Benstead, R., 2009. A national risk assessment for intersex in fish arising from steroid estrogens.
 37
 38 *Environmental Toxicology and Chemistry* 28, 220-230.
 39
 40 Zbyszewski, M., Corcoran, P.L., 2011. Distribution and Degradation of Fresh Water Plastic Particles
 41
 42 Along the Beaches of Lake Huron, Canada. *Water, Air, & Soil Pollution* 220, 365-372.
 43
 44 Zbyszewski, M., Corcoran, P.L., Hockin, A., 2014. Comparison of the distribution and degradation of
 45
 46 plastic debris along shorelines of the Great Lakes, North America. *Journal of Great Lakes Research*
 47
 48 40, 288-299.
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65

Zubris, K.A., Richards, B.K., 2005. Synthetic fibers as an indicator of land application of sludge.
Environ Pollut 138, 201-211.

Table 1. The average ($\pm$ St Dev) sediment weight (g in 1-4 mm size range from 1 L samples, $n=4$), total number of microplastic particles for four 1 L sediment samples and average ($\pm$ St Dev) number of microplastic particles per sample ($n=4$) reported both as total particles extracted per 1 L sediment and weight-corrected to particles per 100 g sediment (1-4 mm fraction) from sediment samples from four sites in the Thames basin, namely two rural sites Leach and Lambourn (with low population equivalent densities and low sewage input) and the urban sites Cut 1 and Cut 2 (with high population equivalent density and high sewage input). Average ($\pm$ St Dev) numbers of microplastic particles per site ($n=4$) are reported for both totals and within the categories of particle size distribution split into two size ranges (1-2mm & 2-4mm) and three particle types (“fragments”, “fibres” and “films”); averages that do not share a common letter are significantly different (Tukey $p < 0.05$).

Site	Average dry weight of sediment in 1-4mm size fraction (g) from 1 L total sample	Total actual number of particles between 1-4mm at site (total of 4 replicates)	Average actual number of particles between 1-4mm	Average number of particles per 100g between 1-4mm	Size distribution (particles per 100g)		Particle types (per 100g)		
					Average number of particles (1-2 mm) (A)	Average number of particles (2-4 mm) (B)	Average number of fragments (A)	Average number of fibres (A)	Average number of films (B)
Leach	128.1 $\pm$ 50.8 (B)	88	22 $\pm$ 5.2 (A)	18.5 $\pm$ 4.2 (A)	10.2 $\pm$ 3.1	8.3 $\pm$ 1.9	3.2 $\pm$ 0.6 (CDE)	14.7 $\pm$ 3.8 (BCD)	0.6 $\pm$ 1 (E)
Lambourn	191.1 $\pm$ 62.7 (B)	149	37.3 $\pm$ 5.8 (A)	22.1 $\pm$ 9.5 (A)	14.1 $\pm$ 5.4	8.1 $\pm$ 5.3	3.1 $\pm$ 3 (CDE)	16.9 $\pm$ 5.7 (BC)	1.7 $\pm$ 1.6 (DE)
The Cut site 1	459 $\pm$ 148.4 (A)	1190	297.5 $\pm$ 85.5 (B)	66 $\pm$ 7.7 (B)	41.9 $\pm$ 3.4	24.1 $\pm$ 5	53.3 $\pm$ 7.8 (A)	12.1 $\pm$ 4.5 (BCDE)	0.6 $\pm$ 0.3 (E)
The Cut site 2	225.8 $\pm$ 88.6 (B)	252	63 $\pm$ 25.4 (A)	33.2 $\pm$ 16.1 (AB)	20.5 $\pm$ 12	12.7 $\pm$ 4.6	9.1 $\pm$ 9.6 (BCDE)	22.3 $\pm$ 7.1 (B)	1.7 $\pm$ 1.3 (DE)

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49

Figure captions:

Fig. 1. Map to show locations of sampling sites within the Thames basin and the UK.

Fig. 2. Site characteristics including average percentage effluent in the river at the sampling sites and population equivalent density of upstream sewage treatment works.

Fig. 3. Total number of microplastic particles at each site per 100 g dry weight of sediment, and number of different types of particles (fragment, fibre and film) within this total. Different letters indicate significant differences between the number of microplastic particles per 100 g at each site.

Fig. 4. Proportional compositions of 111 identifiable particles characterised by Raman analysis (of an original 336 analysed particles) across all sites including polymers, dyes (inferred to be polymers) and particles misidentified as plastics (natural substances)

Fig. 5. Photographs comparing particles collected directly from coloured road surfaces/road marking paints (top row) to particles extracted from sediment samples at The Cut site 1 (bottom row). These particles all fit within the 2-4 mm size range. Photos were taken using a Nikon Coolpix 4500 camera with a Nikon Coolpix MDC lens attachment on a Nikon SMZ800 stereo microscope with Photonic PL2000 cold light source at varying magnifications. Arrows highlight incorporated glass beads, present both in particles taken from road marking paints and in environmental samples.

Figure 1 (2-column)
[Click here to download high resolution image](#)

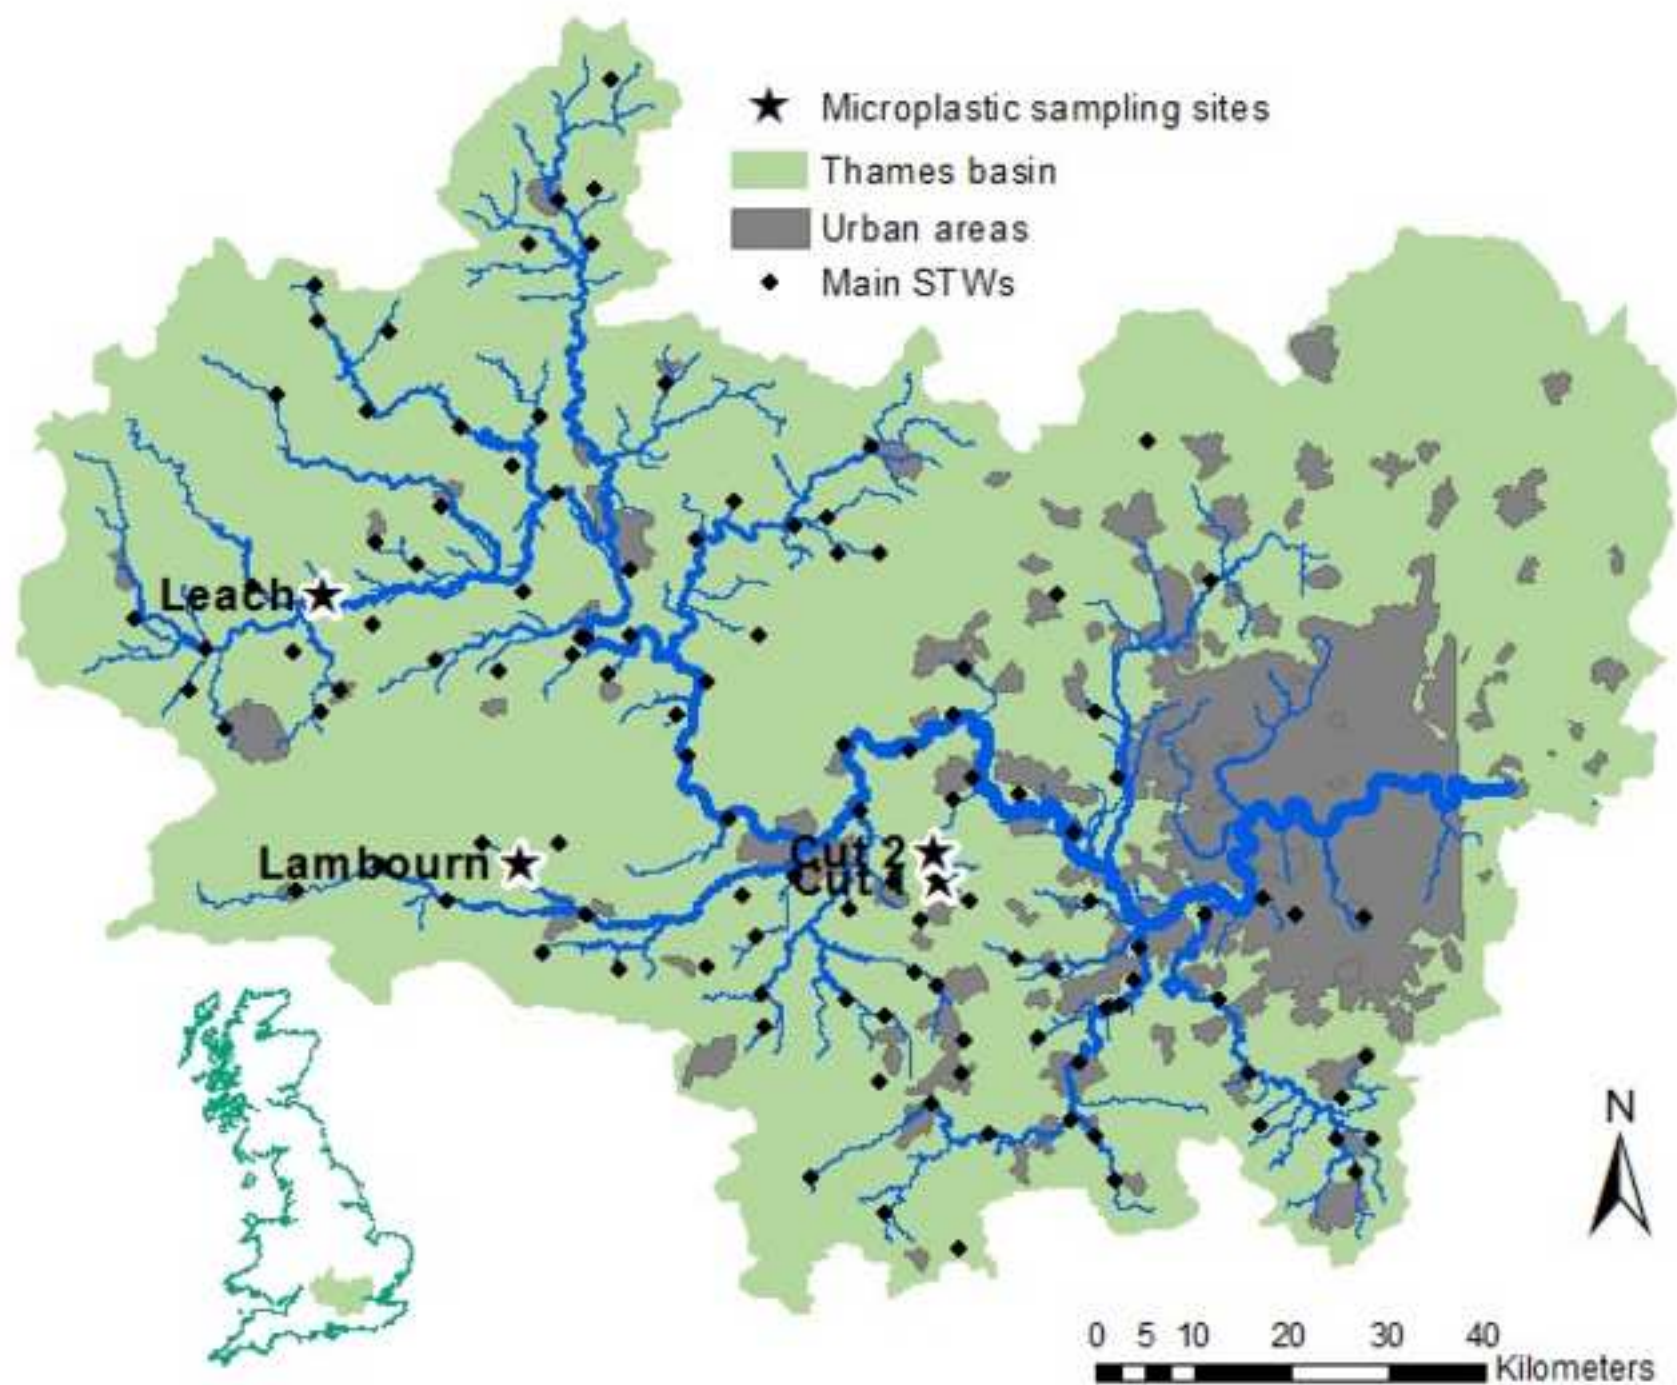


Figure 2 (1-column)
[Click here to download high resolution image](#)

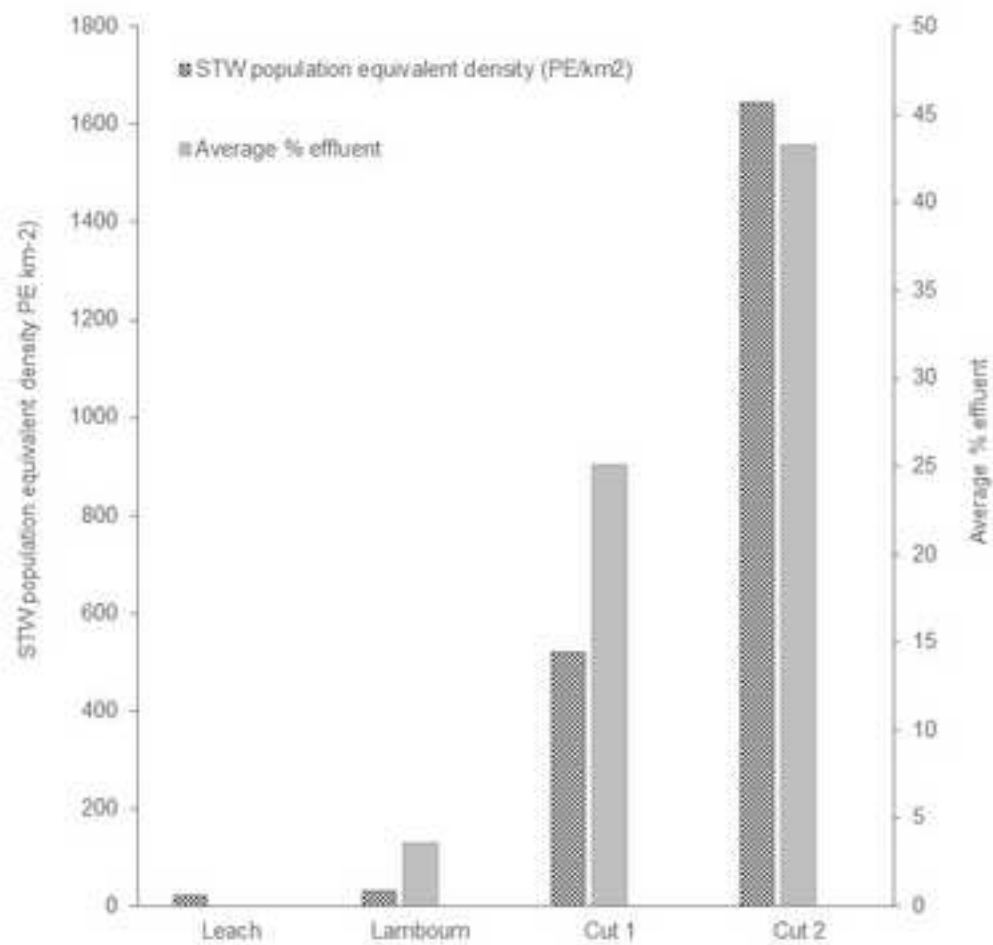


Figure 3 (1-column)
[Click here to download high resolution image](#)

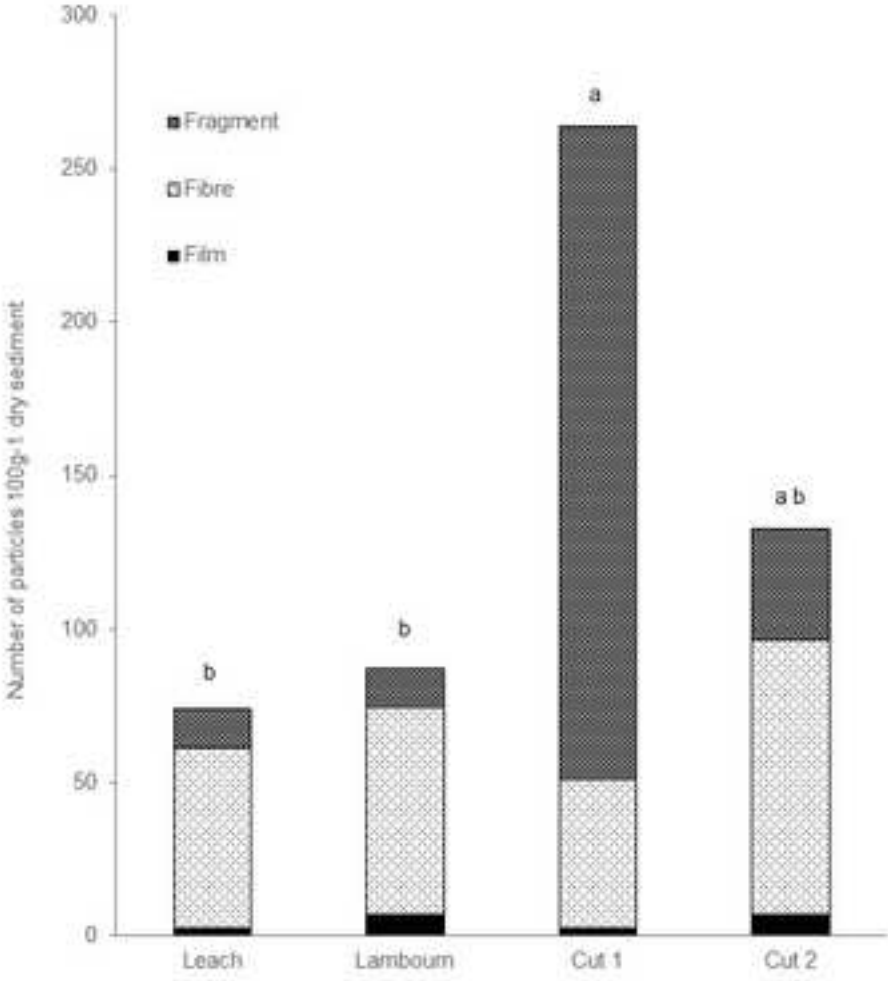


Figure 4 (1-column)
[Click here to download high resolution image](#)


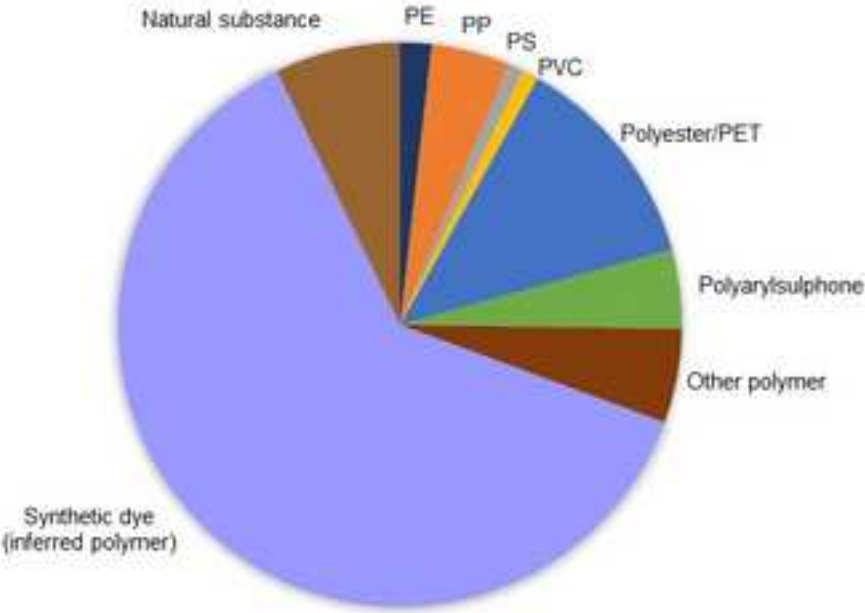


Figure 5 (2-column)
[Click here to download high resolution image](#)

Particles collected
from road surface



Particles extracted
from sediment

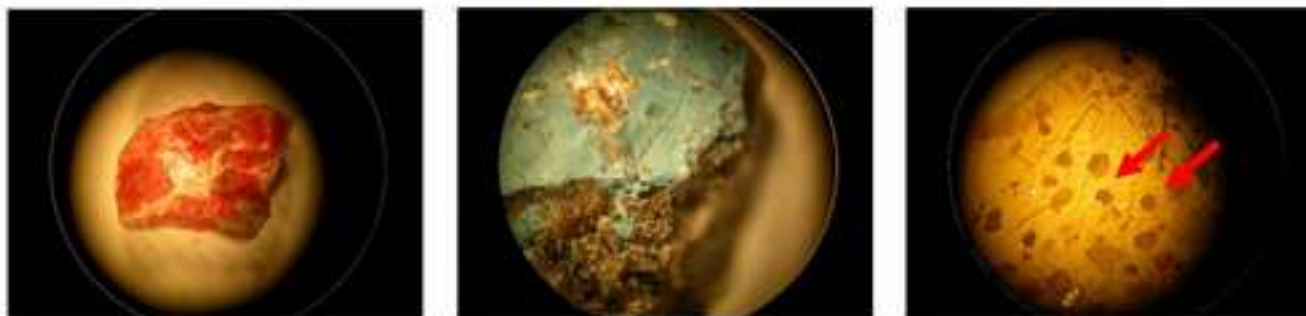