



Universiteit
Leiden
The Netherlands

Future environmental impacts of hydrogen production and its use in container shipping

Wei, S.

Citation

Wei, S. (2026, February 11). *Future environmental impacts of hydrogen production and its use in container shipping*. Retrieved from <https://hdl.handle.net/1887/4289906>

Version: Publisher's Version

License: [Licence agreement concerning inclusion of doctoral thesis in the Institutional Repository of the University of Leiden](#)

Downloaded from: <https://hdl.handle.net/1887/4289906>

Note: To cite this publication please use the final published version (if applicable).

3 Life cycle assessment of hydrogen-based fuels use in internal combustion engines of container ships until 2050^d

Abstract

Hydrogen-based fuels are potential candidates to help international shipping achieve net-zero greenhouse gas (GHG) emissions by around 2050. This paper quantifies the environmental impacts of liquid hydrogen, liquid ammonia, and methanol used in a Post-Panamax container ship from 2020 to 2050. It considers cargo capacity changes, electricity decarbonization, and hydrogen production transitions under two International Energy Agency scenarios: the Stated Policies Scenario (STEPS) and the Net Zero Emissions by 2050 Scenario (NZE). Results show that, compared to the existing HFO ship, hydrogen-based propulsion systems can decrease cargo weight capacity by 0.3% to 25%. In the NZE scenario, hydrogen-based fuels can reduce GHG emissions per tonne-nautical mile by 48%–65% compared to heavy fuel oil by 2050. Even with fully renewable hydrogen-based fuels, 18%–31% of GHG emissions would still remain. Using hydrogen-based fuels in internal combustion engines requires attention to minimize environmental trade-offs.

3.1 Introduction

International shipping enables 80-90% of global trade and comprises about 85% of the net greenhouse gas (GHG) emissions associated with the shipping sector.¹⁵³ The high amount of GHG emissions is mainly due to high reliance on the use of fossil fuels including heavy fuel oil (HFO) and marine gas oil (MGO).¹⁵⁴ The International Maritime Organization (IMO) aims to reach net-zero GHG emissions from international shipping close to 2050 and strives to achieve an uptake of 5-10% alternative zero and near-zero GHG fuels in energy use by 2030.¹⁵⁵ Hydrogen-based fuels like hydrogen (H₂), ammonia (NH₃) and methanol (MeOH) are candidate low-carbon fuels.^{49, 153, 156} At this moment, the shipping sector has limited experience using H₂-based fuels and overall environmental trade-offs of these different fuels have not yet been extensively analyzed.¹⁵⁷

Assessing the environmental impacts of using H₂-based fuels on ships helps to identify environmentally optimal alternative fuels and design a comprehensive roadmap to promote an effective transition to low-carbon fuels. Life cycle assessment (LCA) is the standard approach to assess the environmental impacts in a scientific and holistic manner.¹⁵⁵ Several studies have done LCA research on using H₂-based fuels for international shipping. Bicer and Dincer²⁴ compare the environmental impacts of low-

^d Published as: Wei, S., F. M. Kanchiralla, F. Schulte, H. Polinder, A. Tukker and B. Steubing (2026). "Life cycle assessment of hydrogen-based fuels use in internal combustion engines of container ships until 2050." *Resources, Conservation and Recycling* 226: 108671.

carbon H_2 and NH_3 produced with biomass, municipal waste and geothermal energy and HFO when used for transoceanic freight shipping. They find that switching to low-carbon H_2 and NH_3 in maritime transportation can reduce GHG emissions and other environmental impacts considerably. They assume the energy use per tonne-kilometer is the same among different fuels and ignore for instance changes in available cargo capacity due to changes in fuel storage and propulsion systems adapted to the different fuels.^{10, 158, 159} Kanchiralla et al.²⁶ evaluate the environmental impacts of operating a tanker equipped with an internal combustion engine and fuel cell, powered by various hydrogen-based fuels such as H_2 , NH_3 , and MeOH, by 2030. While the initial technical viability analysis quantifies the changes in volume and weight of H_2 -based propulsion systems compared to traditional ones, the effects of possible load capacity loss on environmental impacts have not been comprehensively assessed. Moreover, existing research often assumes that H_2 -based fuels are exclusively sourced from renewables or low-carbon electricity, while overlooking the constraints of the global H_2 market, with the market shares of different technologies varying across roadmaps. This assumption could lead to overly optimistic conclusions regarding the decarbonization of the shipping sector using H_2 -based fuels.

To fill this knowledge gap, we develop a methodology to quantify the changes in cargo space and weight when replacing traditional HFO propulsion systems with H_2 -based fuels. This approach is integrated with a future-oriented global H_2 production model that includes improvements in energy and material efficiency, the evolution of the H_2 market, and electricity decarbonization. Using this framework, the life-cycle environmental impacts of a typical Post-Panamax containership powered by various H_2 -based fuels are quantified from 2020 to 2050. The results aim to guide the deployment of H_2 -based fuels in container shipping while minimizing environmental impacts.

3.2 Methods and data

3.2.1 Goal and Scope

An attributional LCA is used in this study to compare the environmental impacts of a containership powered by liquid H_2 , liquid NH_3 , MeOH, and conventional HFO from cradle-to-grave between 2020 and 2050. The functional unit of this study is defined as “carrying one tonne of cargo over a distance of one nautical mile (t-nm)”, where 1 nm equals 1.852 km. A Post-Panamax containership with a capacity of 8,749 TEU (twenty-foot equivalent units) is chosen as the representative ship for the size range 8,000-11,999 TEU, which is the most commonly used size class for international container shipping (there are nine size categories of containerships, ranging from 0-999 TEU to 20,000+ TEU). Ships within this size class (8,000-11,999 TEU) were also the largest emitters of GHG emissions among containerships in 2018, accounting for 25% of emissions.¹⁵⁴ By 2050, this category is expected to have the largest share of ships, up to 20%.¹⁵⁴ As shown in Figure 3.1, this study considers four types of propulsion systems: diesel internal

combustion engines (ICE) burning HFO, and dual fuel engines using liquid H_2 , liquid NH_3 , and MeOH with MGO as the pilot fuel. Since H_2 -based fuels are difficult to ignite directly under compression-ignition conditions, a small amount of easily ignitable pilot fuel is required to ignite the primary alternative fuel.¹⁵⁴ Dual fuel ICE are emphasized in the Fourth IMO report because they are easier to scale up compared to spark ignition engines.¹⁵⁴ Additionally, dual fuel ICE can utilize H_2 -based fuels with slightly lower energy efficiency compared to traditional diesel ICE; however, they do not require significant retrofitting of existing propulsion systems and offer lower costs compared to fuel cells. For MeOH production, this study considers CO_2 from direct air capture (DAC) as the feedstock. Although biogenic CO_2 can currently be obtained at lower cost, its availability is limited.¹⁶⁰ Moreover, DAC has lower land intensity and greater flexibility in both time and space,^{161, 162} making it a more scalable and globally applicable solution in the long-term.

To comprehensively reflect the impacts of these propulsion systems and corresponding fuel supply on the environment, this study considers multiple ship design and operation scenarios involving different ranges and speeds, as well as future H_2 supply scenarios aligned with different policy settings (see Sections *Ship design and operation scenarios* and *H_2 supply*). Consistent with the foreground data, background data reflecting electricity decarbonization under different scenarios are also used (see Section *Background data*).

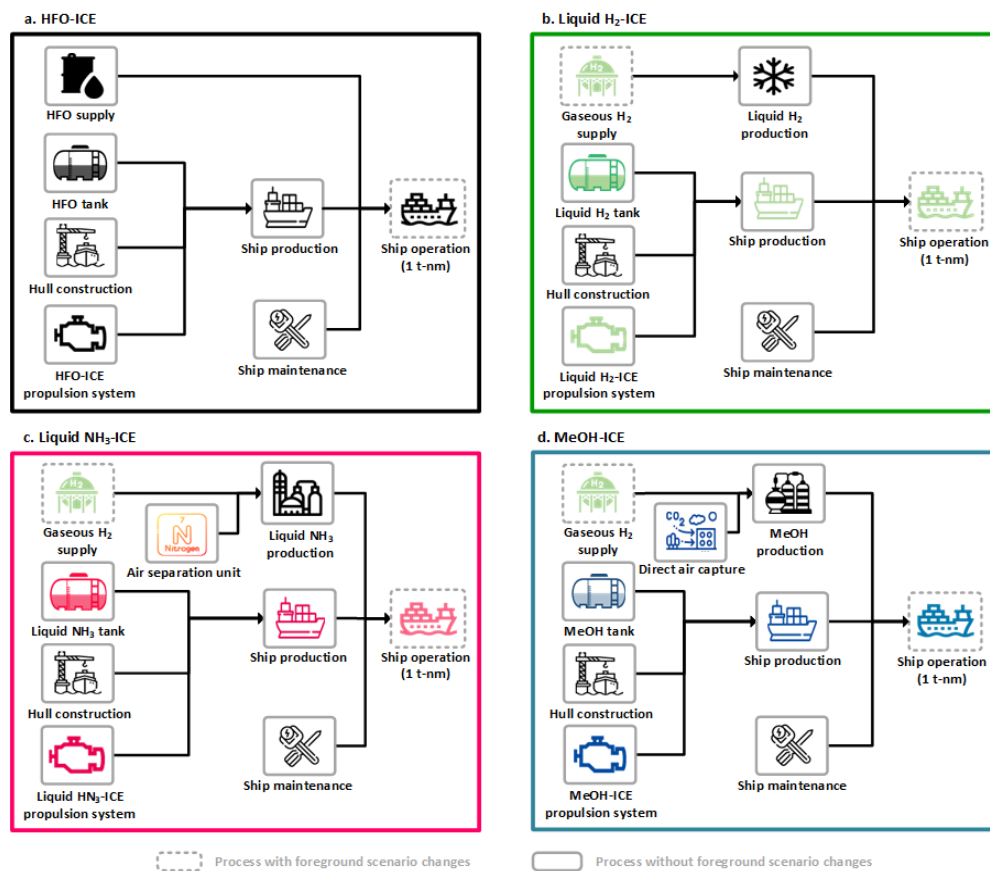


Figure 3.1. System boundaries for container shipping with different propulsion systems (The case ship information and detailed flow charts showing the unit processes of each propulsion system are provided in Section S2.1 of the supporting information (SI)).

Ship design and operation scenarios. The various H₂-based propulsion systems differ in overall volume and weight, depending on the configuration of components within the system, the physical properties of each fuel—liquid H₂, liquid NH₃, or MeOH—and the specific tank types designed to storage each fuel. These differences will affect the cargo capacity in terms of available space and weight compared to HFO-ICE ship. The size of the fuel tank is an important aspect of such long-distance vessels which depends on the ship’s designed range (a larger fuel tank is required for a larger range, but could affect cargo capacity), and speed (slower speed decreases energy consumption for the same range⁴³ and allows for a smaller fuel tank, although it requires more time to complete the journey). The change in the available cargo capacity will directly impact the fuel use per transport work and, consequently, the environmental impacts.

To investigate the impacts of these design and operation choices, the study sets various operation scenarios covering different ranges, speeds, and refueling times. As shown in Table 3.1, six combined scenarios are analyzed based on a main route between Asia (Shanghai) and Europe (Rotterdam), where container ships with a capacity of 8,000–11,999 TEU operate.¹⁶³ The round trip between Shanghai and Rotterdam without refueling, which is technically feasible but requires carrying more fuel on board at once, serves as the upper boundary. Although the scenario assuming a 22,000 nm round trip without refueling may not reflect typical operational practice, it is included as an exploratory boundary scenario to assess the upper-limit impact of H₂-based fuels on ship cargo capacity. This extreme case is intended to reveal the technical design constraints that may arise under maximum endurance conditions. A typical single trip between Shanghai and Rotterdam covering 11,000 nm range without refueling is set as the medium scenario. Finally, a single trip between Shanghai and Rotterdam with one refueling stop is assumed to represent the minimum operational range of 5,000 nm. Interim port calls that allow for refueling can reduce the amount of fuel carried; however, frequent stops also increase operational costs due to port fees and time spent in port. Therefore, only one port call is assumed in this scenario. This shorter route is well within the range of the container ships in this size category.¹⁶⁴ Each range is coupled with an average service speed of 20 nautical miles per hour (knots)¹⁶⁵ and a lower speed of 16 knots¹⁶⁶ to evaluate the effects of speed.

Table 3.1. Ship operation scenarios. The range refers to the maximum distance a ship can go on a single fuel loadout.

Scenario	R-A-N	R-L-N	S-A-N	S-L-N	S-A-I	S-L-I
Range	22000 nm	22000 nm	11000 nm	11000 nm	5500 nm	5500 nm
Trip	Round	Round	Single	Single	Single	Single
Speed	20 knots	16 knots	20 knots	16 knots	20 knots	16 knots
Stops to refuel	Nonstop	Nonstop	Nonstop	Nonstop	1	1

3.2.2 Life cycle inventory analysis

We will now discuss the unit process data for ship production, fuel supply, and ship operation. Detailed information on all unit process data is available in Section S2.2 of the SI.

Ship production. The material composition of the container ship construction is determined by the lightweight mass (*LWT*) as calculated by Eq. 1, and material breakdowns are from Jain et al.¹⁶⁷ and Notten et al.¹⁶⁸ Material demands for the main engine are excluded at this stage, with detailed life cycle inventory (LCI) data for the main engine collected separately. Welding, electricity use, heat consumption, and emissions during hull construction are calculated according to Notten et al.¹⁶⁸

$$LWT = (1 - \lambda) \times \frac{DWT}{\lambda} \quad (1)$$

where *LWT* represents the weight of the empty vessel, including hull material, machinery, and outfitting;¹⁶⁹ deadweight tonnage (*DWT*) is the load capacity of the vessel, including the cargo, fuel, water, crew and effects¹⁷⁰ (103800 t¹⁷¹); and λ is the ratio of the *DWT* to the total weight of the ship (70%¹⁷²). It is assumed that the *LWT* of the ship remains unchanged regardless of the propulsion system.

H₂ supply. This study builds upon the model of Wei et al.⁵³ to account for the environmental impacts of global future H₂ supply, which integrates two H₂ scenarios by the International Energy Agency's, the Stated Policies (STEPS) Scenario and Net Zero Emissions by 2050 (NZE) Scenario.⁵³ The models encompass nine leading H₂ production technologies, including coal gasification, natural gas steam reforming, and biomass gasification, both with and without carbon capture and storage (CCS), as well as grid-coupled water electrolysis using alkaline electrolyzers, proton exchange membrane electrolyzers, and solid oxide electrolysis cells. The models also consider electricity decarbonization, efficiency improvements, advancements in electrolyzer technology, and changes in the H₂ production mix.

Fuel oil and H₂-based fuel supply chain. The HFO and MGO are sourced from the global market as modeled in the ecoinvent database.¹⁰⁹ To comply with the global sulfur limit outside Sulfur Emission Control Areas (SECAs) under the IMO 2020 regulation,¹⁷³ a desulfurization process based on Silva¹⁷⁴ is applied to reduce the sulfur content in HFO and MGO from 1.03%¹⁰⁹ to 0.5%. Although SECAs enforce a stricter sulfur content limit of 0.1%, and fuel switching is required when entering these areas, this process is not considered in the model since the fuel consumption within SECAs is marginal compared to the total voyage. The gaseous H₂ from the global market⁵³ is used as the feedstock for the liquid H₂, liquid NH₃ and MeOH production. For liquified H₂ production, input data for the H₂ liquefaction plant and H₂ loss are taken from Wulf and Zapp,¹⁷⁵ with a median electricity consumption of 10.5 kWh per kg of liquified H₂.¹⁷⁶ The LCI for liquid NH₃ production is derived from the research of D'Angelo, et al.⁵⁴ The LCI for MeOH production comes from González-Garay et al.¹⁷⁷ CO₂ feedstock is obtained via direct air capture, with its LCI provided by Keith et al.¹⁷⁸

Propulsion systems. The components in different propulsion systems vary from one another. Each component is sized according to the same output power required for the

propeller and auxiliary systems. For the dual-fuel ICEs combusting H₂-based fuels, 5% of the energy content is required as MGO for pilot fuel.²⁶ Selective catalytic reduction (SCR) is equipped on both main and auxiliary engines operating with HFO, liquid NH₃, and MeOH. For liquid H₂, however, SCR is applied only to the main engine. This is because H₂ combustion in the main engine can generate nitrogen oxides (NO_x), as the higher flame temperatures promote thermal NO_x formation from nitrogen and oxygen in the intake air, whereas such conditions are less pronounced in the auxiliary engine.^{179, 180} The activating element in the SCR catalyst is assumed to be TiO₂, making up about 0.25% of the SCR weight.¹⁸¹ SCR catalysts are expected to be replaced once during the ship's lifetime.²⁵

The specific components for different propulsion systems are detailed in the SI Figure S2.1. Key parameters and LCI sources for these components are listed in Table S2.2 in the SI. For the LCI of motor drive manufacturing, material data is sourced from Westberg,¹⁸² and electricity consumption information is provided by the manufacturer.¹⁸³

Fuel storage. The HFO is stored in normal diesel tanks.²⁵ Liquid H₂ and NH₃ are stored in cryogenic tanks. MeOH, being liquid at room temperature, is stored in MeOH tanks. The characteristics of these fuels, their storage requirements, and the corresponding LCI sources are summarized in Table S2.3 in the SI.

Ship operation. Compared to HFO, H₂-based fuels have lower volumetric and gravimetric energy densities in onboard storage, either due to their inherently low energy density (e.g., liquid NH₃ and MeOH) or the need for dedicated cryogenic tanks with insulation (e.g., liquid H₂ and liquid NH₃). As a result, using all types of H₂-based fuels may necessitate sacrificing part of the cargo space and weight to complete the same voyage. The processes for determining these values are illustrated in Figure S2.2 in the SI. The detailed calculation process is discussed further in the subsequent sections.

To complete the same voyage with different propulsion systems and operating scenarios, the corresponding on-board energy demands are determined using Eq. 2.

$$E_{ij} = \left(\frac{P_{AM}}{\eta_{Mi}} + \frac{P_{AA}}{\eta_{Ai}} \right) \times T_j \times FM \quad (2)$$

where E_{ij} is the total onboard energy demand of the ship range under the propulsion system i and operation scenario j , in MWh; P_{AM} and P_{AA} (see Eq. 3-4) are the average output power of the main engine and auxiliary power system, in MW; η_{Mi} and η_{Ai} are the efficiencies of the main engine and auxiliary power system for the propulsion system i ; T is the sailing time in the operation scenario j , determined by the ship range and operating speed, hours; FM is the fuel margin (120%¹⁶⁴), introduced to ensure voyage completion even in the event of potential detours, unexpected bad weather conditions, or similar factors.¹⁰

The average output power of main and auxiliary engines is calculated according to Eq. 3 and 4.¹⁵⁴

$$P_{AM} = \frac{P_M \times \left(\frac{D_{Ave}}{D_{Max}}\right)^{\frac{2}{3}} \times \left(\frac{S_{Ave}}{S_{Max}}\right)^3}{\eta_w \times \eta_f} \quad (3)$$

where P_M is the installed power of the main engine, MW; D_{Max} and D_{Ave} are the maximum and average draught of the ship, respectively; S_{Max} and S_{Ave} are the maximum and average operating speed of the ship, respectively; η_w and η_f are correction factors for weather and fouling.

$$P_{AA} = P_A \times LF_A \quad (4)$$

where P_A is the installed power of the auxiliary engine, MW; LF_A is the average load factor of the auxiliary engine (50%^{52, 184}).

For liquid H_2 and NH_3 , boil-off gas (BOG) can occur when heat penetrates the cryogenic tanks. Although BOG can be utilized for propulsion, it is conservatively assumed to be reliquefied for better control.⁴⁷ Since the BOG rate decreases as fuel is consumed, the reliquefaction system is designed based on the maximum hourly BOG volume. The additional energy required for BOG reliquefaction is calculated using Eq. 5.

$$E_{Rij} = \frac{k_{Rij}}{\lambda_{A_i}} \times \sum_{t=0}^{T-1} \left[\left(\frac{E_{ij}}{\rho_i} - \frac{E_{ij} \times t}{\rho_i \times FM \times T} \right) \times BOG_i \right] \quad (5)$$

where E_{Rij} is the energy demand for reliquefying BOG, in MWh; k_{Rij} is the electricity consumption for reliquefying the BOG of propulsion system i under operation scenario j , assumed as 3.3 kWh/kg for liquid H_2 ¹⁸⁵ and 0.224 kWh/kg for liquid NH_3 ¹⁸⁶; t is time point of ship operation in one voyage, in hours; ρ_i is the energy density for fuel used in propulsion system i ; and BOG_i is the hourly evaporation rate of the fuel used in propulsion system i , assumed as 0.0167% per hour for liquid H_2 and 0.0017% per hour for liquid NH_3 .¹⁸⁷

In addition to the variations in fuel volume and mass, and the corresponding tank sizes required by different propulsion systems, the installed power, volume, and mass of components in H_2 -based propulsion systems differ from those in traditional systems. Consequently, there will be changes in cargo space and weight, as described by Eq. 6 and Eq. 7.

$$\Delta V_{ij} = \beta \times V_{OE} + V_{OT} + V_{OO} - \alpha \times V_{HE_i} - (E_{ij} + E_{Rij}) \times \left(\frac{0.95}{V_{FTH_i}} + \frac{0.05}{V_{FTP_i}} \right) - V_{HO_i} \quad (6)$$

where ΔV_{ij} is the change in cargo space (in m^3) due to the adoption of H_2 -based propulsion system i in the scenario j . β is the ratio of the engine room volume to the HFO-ICE main engine volume (V_{OE}), which is 5 times larger due to clearances required for access and maintenance.¹⁶⁵ V_{OT} is the volume of the existing HFO tank, which is 12000 m^3 . V_{OO} is the

sum of volumes of other necessary components in the HFO-ICE propulsion system, m³; α is the ratio of the engine room volume to the volume of the main engine in H₂-based propulsion system i (V_{HEi}), which is 5 times larger for the dual fuel ICE.¹⁶⁵ V_{FTHi} and V_{FTPi} are volumetric energy densities (including tank) of the H₂-based fuel and pilot fuel used in the propulsion system i . V_{HOi} is the sum volume of other components in the H₂-based propulsion system i .

$$\Delta M_{ij} = M_{OE} + M_{OT} + \frac{E_{ij}}{G_O} + M_{OO} - M_{HEi} - (E_{ij} + E_{R_{ij}}) \times \left(\frac{0.95}{G_{FTHi}} + \frac{0.05}{G_{FTPi}} \right) - M_{HOi} \quad (7)$$

where the ΔM_{ij} is the change in cargo weight (in tons) due to the replacement of the HFO-ICE propulsion system with the H₂-based propulsion system i in the scenario j . M_{OE} is the mass of the HFO main engine and M_{OT} is the mass of the existing HFO tank. G_O is the gravimetric energy density of HFO. M_{OO} is the sum mass of other components in the HFO-ICE system. M_{HEi} is the mass of the main engine of the H₂-based propulsion system i . G_{FTHi} and G_{FTPi} are gravimetric energy densities (including the tank) of the H₂-based fuel and pilot fuel used in the propulsion system i . M_{HOi} is the sum mass of other components in the propulsion system i .

Finally, the fuel consumption per t-nm is determined based on the energy demand leaving the fuel margin, ship range and resulting cargo weight. The emissions with different propulsion systems are detailed in Table S2.4 in the SI.

Background data. To avoid the temporal mismatch between foreground and background data and to reflect the future development in other key sectors, this study uses prospective LCI background databases. These are derived from ecoinvent v3.8 database (system model “Allocation, cut-off by classification”)¹⁰⁹ and the REMIND model,⁶⁶ utilizing the open-source Python library premise v1.5.8.⁶⁵ The REMIND model provides global future scenarios based on shared socioeconomic pathways (SSPs) and representative concentration pathways. For the STEPS and NZE scenarios, two prospective LCI databases are used: SSP2-NDC (~2.5 °C warming by 2100) and SSP1-PkBudg500 (~1.3 °C warming by 2100). These databases update electricity inventories to reflect the regional electricity mix and efficiencies of various technologies, including CCS and photovoltaic panels.²²

The Activity Browser,¹¹³ an open source LCA software was used for LCI modeling and LCA calculations. Multiple foreground scenarios and prospective LCI background databases were handled by the superstructure approach.¹¹⁴

3.2.3 Life Cycle Impact Assessment

To quantify the climate change (kg CO₂-eq) impact, based on the IPCC AR5 characterization factors of global warming potentials with a time horizon of 100 years,¹¹⁰ we add characterization factors for the uptake and release biogenic CO₂ (-1 and +1

respectively), which is needed to account for technologies such as bioenergy with CCS, and H₂ (+11), as H₂ can act as an indirect greenhouse gas.¹¹¹ Additionally, 15 other environmental impact categories are assessed using the method of Environmental Footprint v3.0.¹¹² These categories include acidification (mol H⁺-eq), ecotoxicity: freshwater (CTUe), resource use: energy carriers (MJ), eutrophication: aquatic freshwater (kg P-eq), eutrophication: aquatic marine (kg N-eq), eutrophication: terrestrial (mol N-eq), human toxicity: cancer effects (CTUh), human toxicity: non-cancer effects (CTUh), ionizing radiation: human health (kBq U²³⁵), land use (dimensionless), resource use: minerals and metals (kg Sb-eq), ozone depletion (kg CFC-11-eq), particulate matter (disease incidences), photochemical ozone formation (kg NMVOC-eq) and water use (kg world eq. deprived).

3.3 Results and discussion

3.3.1 Cargo space and weight loss

The cargo space and weight loss caused by using H₂-based propulsion system use are shown in Figure 3.2. Regardless of cargo space or mass loss, fuel storage remains the primary factor, while the impact of the propulsion system is negligible. For cargo space loss, the liquid H₂ system results in the greatest cargo space loss due to its lowest volumetric energy density among the three fuels. In the typical scenario (S-A-N), the cargo space loss is 10%. Longer ranges exacerbate this loss, as a larger fuel storage capacity is required; for instance, doubling the range (scenario R-A-N) can lead to up to 23% cargo space loss. NH₃ and MeOH have less severe impacts. In the R-A-N scenario, MeOH requires only 4% more space compared to the traditional propulsion system. If interim port calls are possible (scenarios S-A-I and S-L-I), container ships powered by liquid NH₃ and MeOH will require smaller tanks than HFO-powered ships, allowing for 1% and 2% more cargo space, respectively. It should be noted that although the cargo space loss is significant, unlike the mass constraint, it can be alleviated by placing the tank on the deck.^{188, 189} For the cargo weight, alternative propulsion systems have adverse effects regardless of the fuel type. The trend in cargo weight loss by fuel type differs from that of cargo space loss. The liquid H₂ storage system has a higher gravimetric energy density compared to the liquid NH₃ and MeOH. Consequently, the cargo weight loss with a liquid H₂ system ranges from 0.3% to 14% across the S-L-I to R-A-N scenarios. Liquid NH₃ and MeOH reduce the cargo weight by 3–25% and 1–19%, respectively, across all scenarios.

The lower speed can reduce the energy demand of one voyage. For a single trip, lower speed can result in a 1–4% reduction in cargo space loss and a 2–4% reduction in cargo weight loss. In a round trip, lower speed shows a more significant impact, mitigating cargo space loss by 2–6% and cargo weight loss by 4–6%.

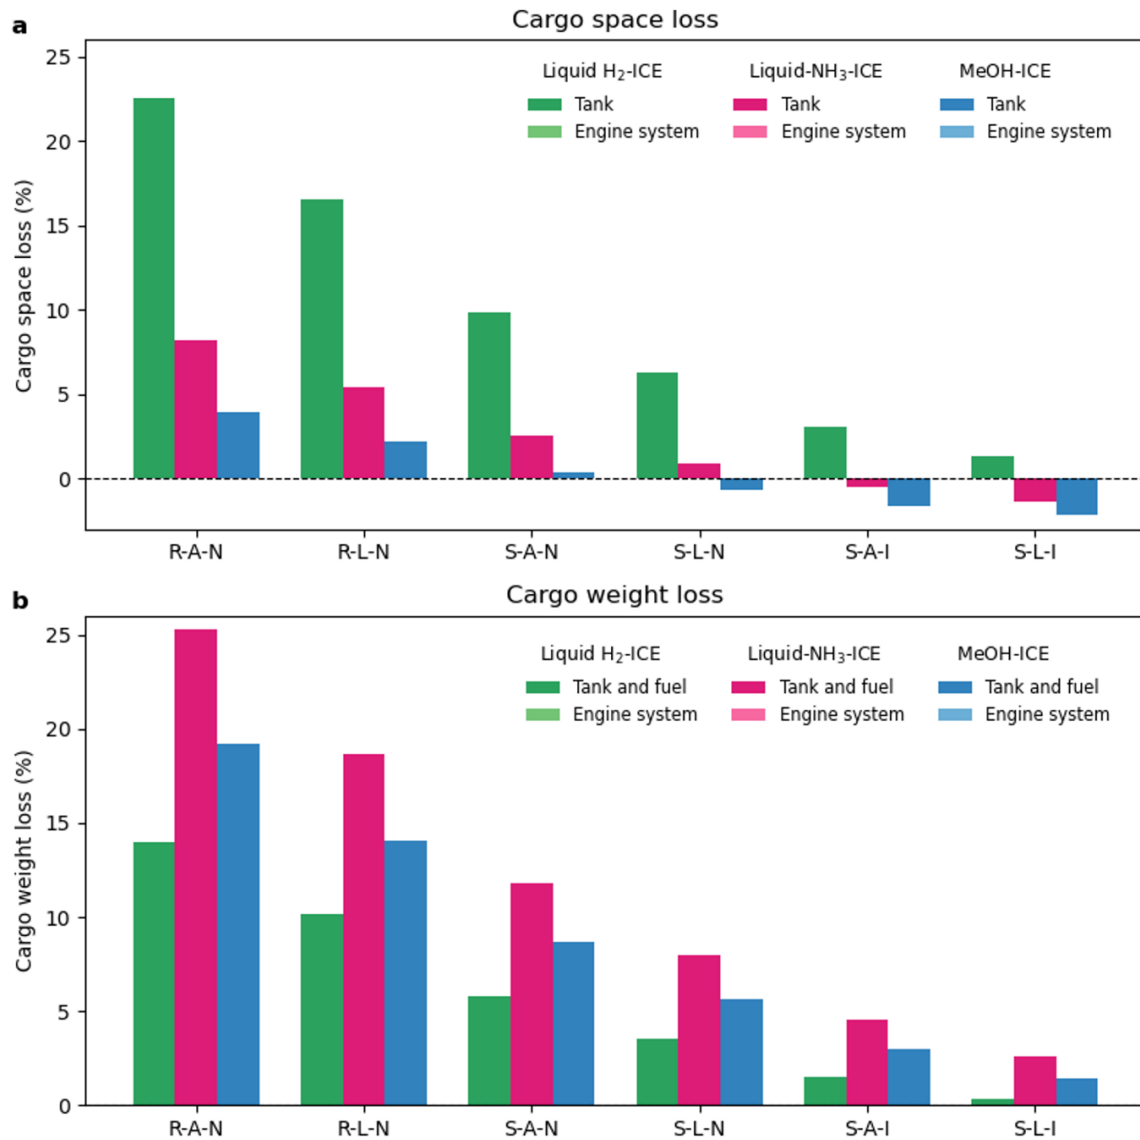


Figure 3.2. The cargo space and weight losses associated with H₂-based propulsion systems compared to the traditional one. In this figure, R-A-N=22000 nm-20 knots-Nonstop, R-L-N=22000 nm-16 knots-Nonstop, S-A-N=11000 nm-20 knots-Nonstop, S-L-N=11000 nm-16 knots-Nonstop, S-A-I=5500 nm-20 knots-1 refueling stop, and S-L-I=5500 nm-16 knots-1 refueling stop. It should be noted that the cargo space and weight change caused by the engine system are minimal, at most 0.02%, which makes them negligible.

3.3.2 Prospective GHG emissions across H₂-markets

Figure 3.3 illustrates the contribution of different processes to the GHG emissions of ships powered by HFO and H₂-based fuels. Currently, the case ship powered by HFO emit approximately 18–24 g CO₂-eq per t-nm, and its emissions are expected to remain unchanged in the future. For H₂-based ships, most of the emissions come from ship operation, H₂ supply, and liquid fuel production, which are correlated with the fuel and electricity used. Ship construction contributes only a small proportion, although some new equipment, such as cryogenic tanks or reliquefaction plants, may be required. In 2020, the GHG emissions from ships powered by H₂-based fuels are approximately 2–3 times higher than those from HFO ships across different scenarios. This is due to the significant reliance on fossil fuels in the electricity and H₂ production mix. For H₂ and NH₃

ships, aside from the emissions from H₂ supply, the main contributors to GHG emissions are the liquefaction process and the Haber-Bosch, respectively. MeOH production can have negative GHG emissions due to CO₂ utilization from direct air capture, but its combustion releases CO₂. In the STEPS scenario, H₂-based fuel production benefits from electricity decarbonization, yet the H₂ market still heavily relies on fossil fuels. As a result, it is hard for ships that use H₂-based fuels to achieve GHG emission reduction compared to HFO-powered ships.

As electricity becomes increasingly decarbonized and the H₂ market shifts towards water electrolysis in the NZE scenario, the GHG emissions of H₂-based ships could drop to 6–10 g CO₂-eq per t-nm by 2050—35–52% of those from HFO-powered ships. Even with long ranges, such as those outlined in the R-A-N scenario, GHG emissions do not show a significant increase compared to shorter single trips (S-A-N). Reducing speed and incorporating interim refueling stops have the potential to decrease the GHG emissions of H₂-powered ships by up to 26% and 8%, respectively. As a result, a non-stop voyage, paired with a lower speed, can achieve lower GHG emissions compared to adding an interim port call, as demonstrated in the S-L-N and S-A-I scenarios. Additionally, reducing speed can help mitigate the negative impact of cargo weight loss caused by the H₂-based propulsion system, without increasing the number of stops or the need for additional infrastructure.

In addition to using H₂ from the market, the shipping sector can also utilize green H₂ sourced from newly built renewable capacities to produce H₂-based fuels. This poses a challenge for the deployment speed of renewables,¹⁹⁰ as it is a highly sought-after commodity by sectors beyond shipping. Here, we further modeled a 100% renewable H₂-based fuel supply to quantify its environmental impacts on container shipping. We assume that all gaseous H₂ is produced entirely through proton exchange membrane electrolysis powered by onshore wind electricity. Additionally, subsequent processes such as H₂ liquefaction, the Haber-Bosch process, direct air capture and MeOH synthesis are also assumed to be powered by onshore wind electricity. When liquid H₂-based fuels are produced using 100% onshore wind electricity, GHG emissions can be reduced by 75–79%, 76%–82%, and 69%–75% by 2050 in the NZE scenario for liquid H₂, liquid NH₃, and MeOH, respectively. The GHG emissions of H₂-based ships powered by 100%-renewable fuels is around 3–7 g CO₂-eq per t-nm. 100% renewable H₂-based fuels can greatly mitigate the climate change impact of the shipping sector but may not fully achieve its net-zero target.

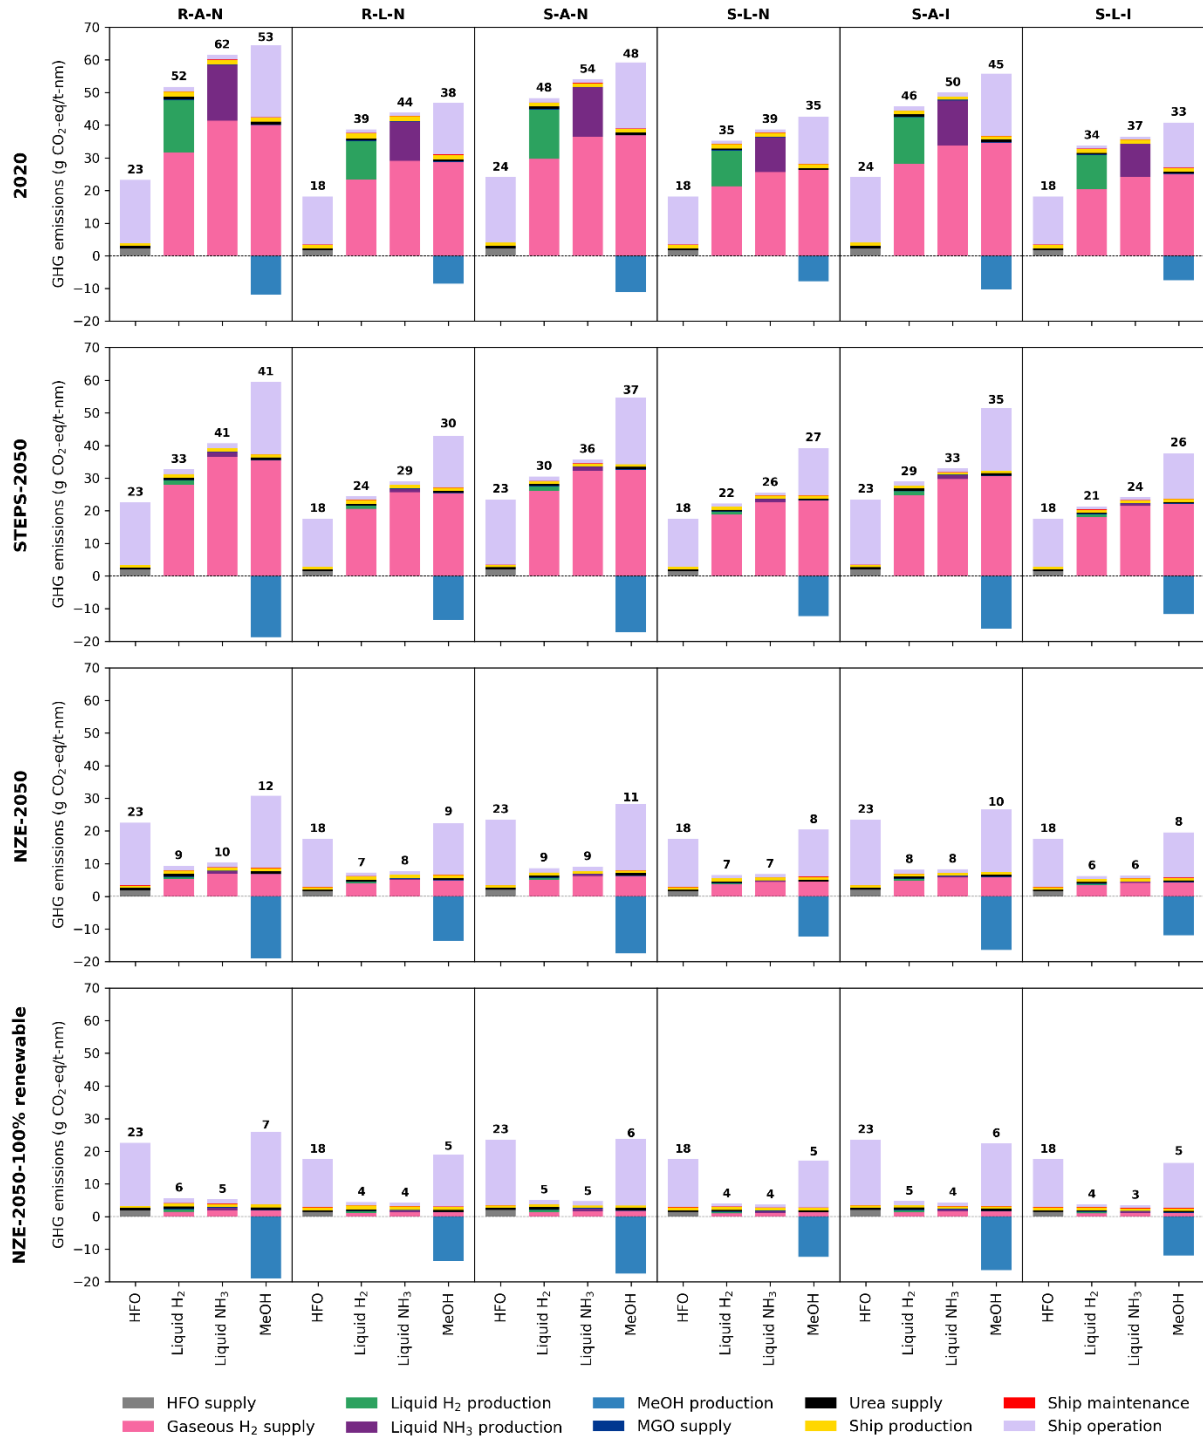


Figure 3.3. The process contribution to the GHG emissions per t-nm of different ships in different scenarios. For the liquid H₂ production, liquid NH₃ production and MeOH production, the gaseous H₂ supply is a part of them and presented separately. In this figure, R-A-N=22000 nm-20 knots-Nonstop, R-L-N=22000 nm-16 knots-Nonstop, S-A-N=11000 nm-20 knots-Nonstop, S-L-N=11000 nm-16 knots-Nonstop, S-A-I=5500 nm-20 knots-1 refueling stop, and S-L-I=5500 nm-16 knots-1 refueling stop. For the MeOH-ICE case, the negative value is caused by the direct air capture. The GHG emissions per t-km are also provided in Figure S2.3 in the SI for comparison with other land-based transport.

3.3.3 Prospective GHG emissions by H₂ sources

The R-A-N scenario is further used as an example to illustrate the GHG emissions of container ships powered by H₂-based fuels derived from various H₂ sources. As shown in

Figure 3.4, H₂-based fuels sourced from biomass and water electrolysis exhibit more significant changes over time compared to those produced directly from fossil fuels.

In 2020, only H₂-based fuels produced via biomass gasification with CCS offer significant GHG emission reductions compared to HFO. Although gaseous H₂ from biomass gasification currently results in very low emissions, the electricity demand for H₂ liquefaction and liquid NH₃ production leads to only slightly lower emissions for container ships fueled by liquid H₂ and NH₃ relative to HFO. In contrast, MeOH-ICE can achieve a 40% reduction in GHG emissions compared to HFO. By 2050, H₂-based fuels from biomass gasification can reduce GHG emissions by 75–82% compared to HFO. Despite this substantial potential, the share of biomass gasification in overall H₂ production is expected to remain marginal by 2050.⁵³ Concerns over large-scale deployment of bioenergy with CCS include socio-economic and environmental impacts due to intensive land, water, and nutrient requirements.^{191, 192} In contrast, container ships powered by H₂-based fuels from water electrolysis using current grid electricity emit roughly three times more GHG than those using HFO, due to the fossil fuel-dominated electricity mix. As the grid electricity decarbonizes, GHG emissions from liquid H₂-ICE, liquid NH₃-ICE, and MeOH-ICE can decrease to 4–8 g, 3–8 g, and 5–10 g CO₂-eq per t-nm by 2050—representing reductions of 65–83%, 64–86%, and 57–79%, respectively, compared to HFO. H₂-based fuels produced using solid oxide electrolysis cells exhibit higher GHG emissions than those from alkaline and proton exchange membrane electrolysis, primarily due to the external heat requirements in H₂ production.

For H₂-based fuels derived from fossil fuels, with or without CCS, emissions in 2020 remain higher than those from HFO. However, with electricity grid decarbonization, fossil-derived H₂ with CCS can reduce GHG emissions by 2050. Specifically, for fuels from coal gasification with CCS, GHG emissions can be reduced by 22%, 11%, and 3% for liquid H₂-ICE, liquid NH₃-ICE, and MeOH-ICE, respectively. For fuels from natural gas steam reforming with CCS, reductions reach 39%, 32%, and 24%, respectively, compared to HFO.

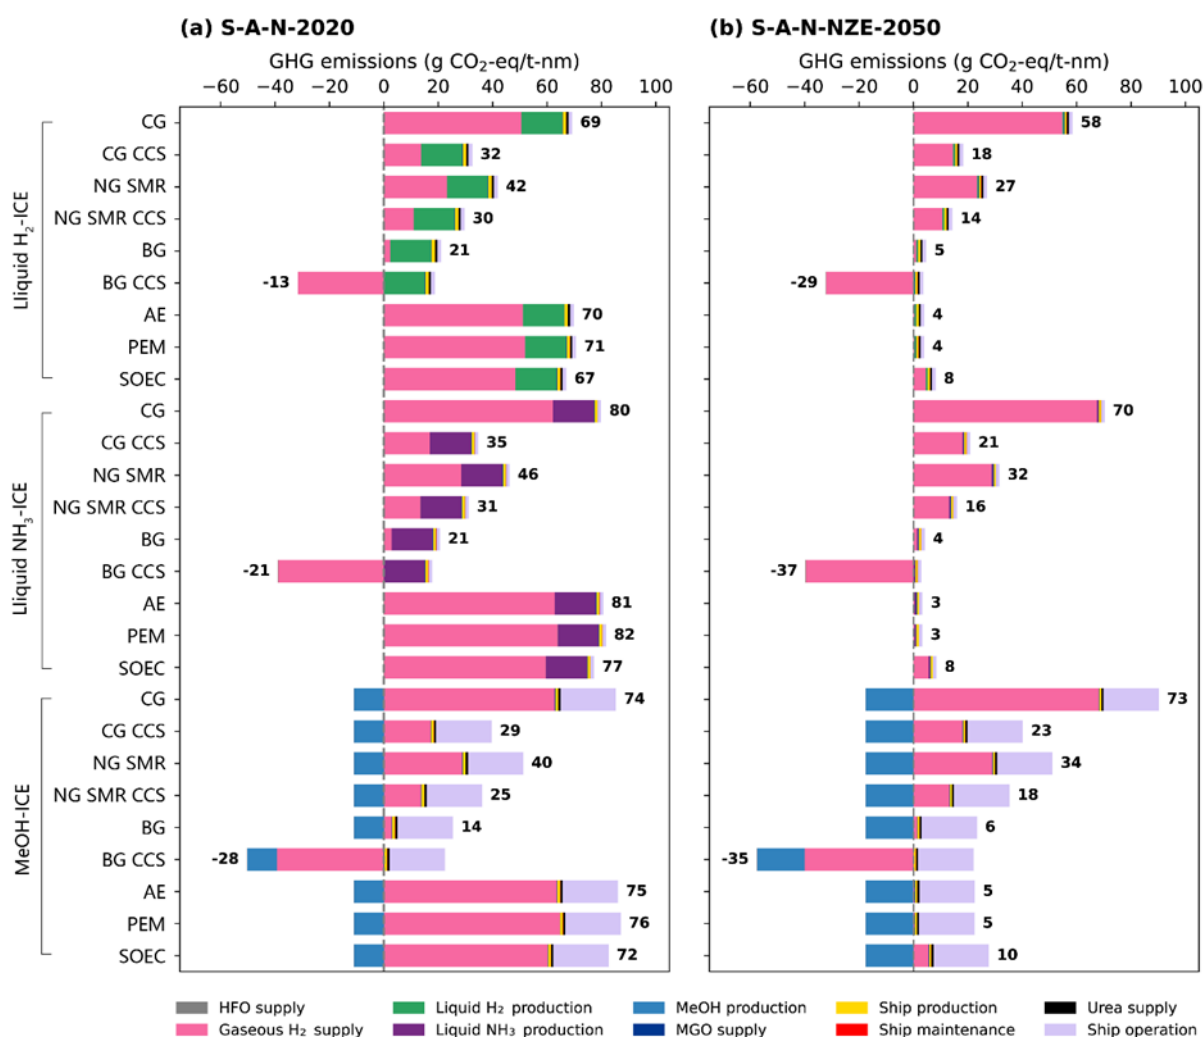


Figure 3.4. Prospective GHG emissions of container ships powered by H₂-based fuels from various gaseous H₂ sources. (a) and (b) show the results for container ships operating non-stop over 10,000 nm at 20 knots in 2020 and 2050 under the NZE scenario, respectively. In this figure, CG=coal gasification, NG SMR=natural gas steam reforming, BG=biomass gasification, CCS=carbon capture and storage, AE=alkaline electrolyzers, PEM=proton exchange membrane electrolyzers, and SOEC=solid oxide electrolysis cells. Negative emissions arise from H₂ production through biomass gasification combined with carbon capture and storage, and from CO₂ captured via direct air capture.

3.3.4 Trade-offs with other impact categories

The environmental benefits of H₂-based fuels largely depend on the decarbonization of electricity and the transition in H₂ production. As shown in Figure 3.5, H₂-based ships currently offer limited environmental benefits compared to the HFO ship, due to the fossil fuel dominated electricity and H₂ markets—except in the case of ozone depletion, where lower fossil-fuel hydrocarbon emissions during fuel production result in a relative advantage.¹⁹³ Primarily due to lower sulfur dioxide (SO₂) emissions from ships powered by liquid H₂ and MeOH, these ships have a reduced impact on acidification. In contrast, the higher nitrogen oxides (NO_x) and NH₃ emissions during NH₃ production, along with NH₃ slip during liquid NH₃ ship operation, result in a higher acidification impact for liquid NH₃ ships compared to the HFO ship. As the electricity mix shifts towards more renewables by 2050 in the STEPS scenario—while the H₂ market remains dominated by coal gasification and natural gas steam reforming without CCS—the reduced share of coal-

fired electricity and associated aluminium emissions give H₂-based ships an edge in ecotoxicity impact¹⁹⁴ compared to HFO ships. Additionally, lower emissions of non-methane volatile organic compounds create the potential for liquid-H₂ ships to lessen the impact on photochemical ozone formation. The significant decarbonization of electricity and the simultaneous transition of H₂ production towards water electrolysis in the NZE scenario together further enhances these environmental benefits. The liquid H₂ ship shows a slight decrease in fossil fuel depletion compared to the HFO ship, as fossil fuel-based H₂, most of which is produced with CCS, still accounts for 39% of the H₂ market by 2050 in the NZE scenario. In contrast, ships powered by liquid NH₃ and MeOH exhibit higher fossil fuel depletion because their energy densities are lower than that of liquid H₂. As a result, more fuel needs to be combusted to produce the same power output, even though their energy requirements per kilogram in the production process are lower than those of liquid H₂.

While H₂-based ships can achieve deep decarbonization by 2050 under the NZE scenario, there are also concerns that the use of H₂-based fuels may exacerbate certain environmental impacts compared to HFO-powered ships. These impacts—such as freshwater eutrophication, particulate matter formation, terrestrial eutrophication, and marine eutrophication—show a decreasing trend in their relative magnitude compared to those of HFO ships, as electricity generation and H₂ production become increasingly decarbonized. For freshwater eutrophication, the impact decreases as the share of electricity and H₂ sourced from coal declines, because coal mining generates spoil that requires treatment and causes associated phosphate emissions to water. However, large-scale water electrolysis powered by renewable electricity requires significant amounts of copper, multi-silicon wafers, and steel in power generation equipment. The production of these materials involves direct and indirect phosphate emissions, which causes H₂-based ships to retain a higher freshwater eutrophication impact compared to HFO ships. Although the combustion of H₂-based fuels results in lower emissions of particulate matter, NO_x, and SO₂ than HFO, emissions from the production of H₂-based fuels lead to higher overall particulate matter formation. Replacing coal gasification with water electrolysis for H₂ production alleviates this impact to some extent. Nevertheless, the production of materials used in solar panels and wind turbines—such as aluminum, multi-Si wafer, and steel—also emits particulate matter, NO_x, and SO₂. Even when electricity is entirely sourced from onshore wind, the high electricity demand of H₂-based fuels makes it difficult for them to have an advantage over HFO ships in terms of particulate matter formation. It should also be noted that NO_x and NH₃ emissions can contribute to particulate matter formation.¹⁹⁵ The relatively high NO_x and NH₃ emissions in liquid ammonia production, along with higher NH₃ slip during ship operation, result in liquid NH₃-powered ships having the highest particulate matter formation impact among all H₂-based ships. For terrestrial and marine eutrophication, the impacts during the ship operation phase are similar between H₂-based and HFO-powered ships, as NO_x

emissions are the primary contributor. The overall eutrophication impact is determined largely by the fuel supply. For liquid H₂ and MeOH, electricity use is the main source of NO_x and NH₃ emissions. In contrast, the production of liquid NH₃ involves higher emissions of these pollutants, resulting in the highest eutrophication impacts among the fuels considered.

Simultaneously, environmental pressures such as mineral and metal extraction, land and water use, ionising radiation, and human toxicity are intensifying due to decarbonization efforts in the electricity and H₂ markets. As the deployment of renewables and water electrolysis expands, the growing demand for rare earth metals needed for solar panels (e.g., tellurium and indium), wind turbines (e.g., neodymium and dysprosium), and electrolyzers (e.g., platinum and iridium)^{127, 128} increases the need for metal and mineral extraction. The installation of new infrastructure also exacerbates competition for land use. Additionally, as H₂ production increasingly relies on water electrolysis, the water use impact of H₂-based ships also rises. Among H₂-based fuels, NH₃ has the highest water use impact due to water evaporation in the cooling tower during the cooling process of liquid NH₃ production. For ionizing radiation, the carbon-14 released during the treatment of low-level radioactive waste via plasma torch incineration in petroleum production contributes to the impact associated with HFO ships. Similarly, natural gas extraction—used as a feedstock for H₂ production—also emits carbon-14, akin to petroleum production. More importantly, the electricity consumption in H₂-based fuel production significantly increases the ionizing radiation impact of H₂-based ships, as nuclear power contributes through radon-222 emissions from uranium tailings treatment, as well as carbon-14 emissions from the treatment of both low-level radioactive waste in uranium production and spent nuclear fuel. As a result, H₂-based ships exhibit a higher ionizing radiation impact than HFO ships. The extent of water electrolysis expansion in the H₂ market and the reduction in nuclear power's share in the electricity mix from 2020 to 2050 affect this impact differently across scenarios: ionizing radiation decreases in the STEPS scenario, but increases in the NZE scenario by 2050 compared to 2020. For human toxicity with cancer effects, despite the production of HFO produces carcinogens such as benzo(a)pyrene, chromium and chromium VI, the ship production process is the major contributor for this impact due to low-alloyed and stainless steel use, which also emits above carcinogens. For the H₂-based ships, the large low-alloyed and stainless steel use induced by liquid H₂ and NH₃ tanks as well as renewable electricity make the overall impact higher than the HFO ship. MeOH ship has the highest impact due to formaldehyde emissions during operation. For human toxicity with non-cancer effects, the fuel production and ship operation phases play decisive roles. In the case of the HFO ship, the impact is mainly attributed to chloride, lead, and mercury emissions during HFO production, as well as CO emissions during ship operation. In contrast, the production of H₂-based fuels requires significant amounts of electricity, which involves large-scale use of copper. Copper production is associated with emissions of arsenic, arsenic ions,

cadmium, and lead, resulting in the higher impact for H₂-based ships compared to the HFO ship. Unlike liquid H₂ and NH₃ ships, which have lower CO emissions than the HFO ship, the MeOH ship emits more CO during operation, resulting in the highest impact among all ship types. Furthermore, using 100% renewable H₂-based fuels can alleviate some environmental pressures, as onshore wind power has lower impacts in these categories compared to other grid electricity sources.

It should be noted although potential trade-offs associated with the use of H₂-based fuels may exist and have been discussed in this study, climate change remains a more relevant impact category due to the current contribution of shipping to global emissions. Moreover, most of the data in this study are focused on GHG emissions. Technological improvements and waste management strategies to reduce other environmental impacts not directly related to climate change were not considered. Therefore, our findings for other impact categories could be overestimations and should be seen as areas where potential improvements are needed.

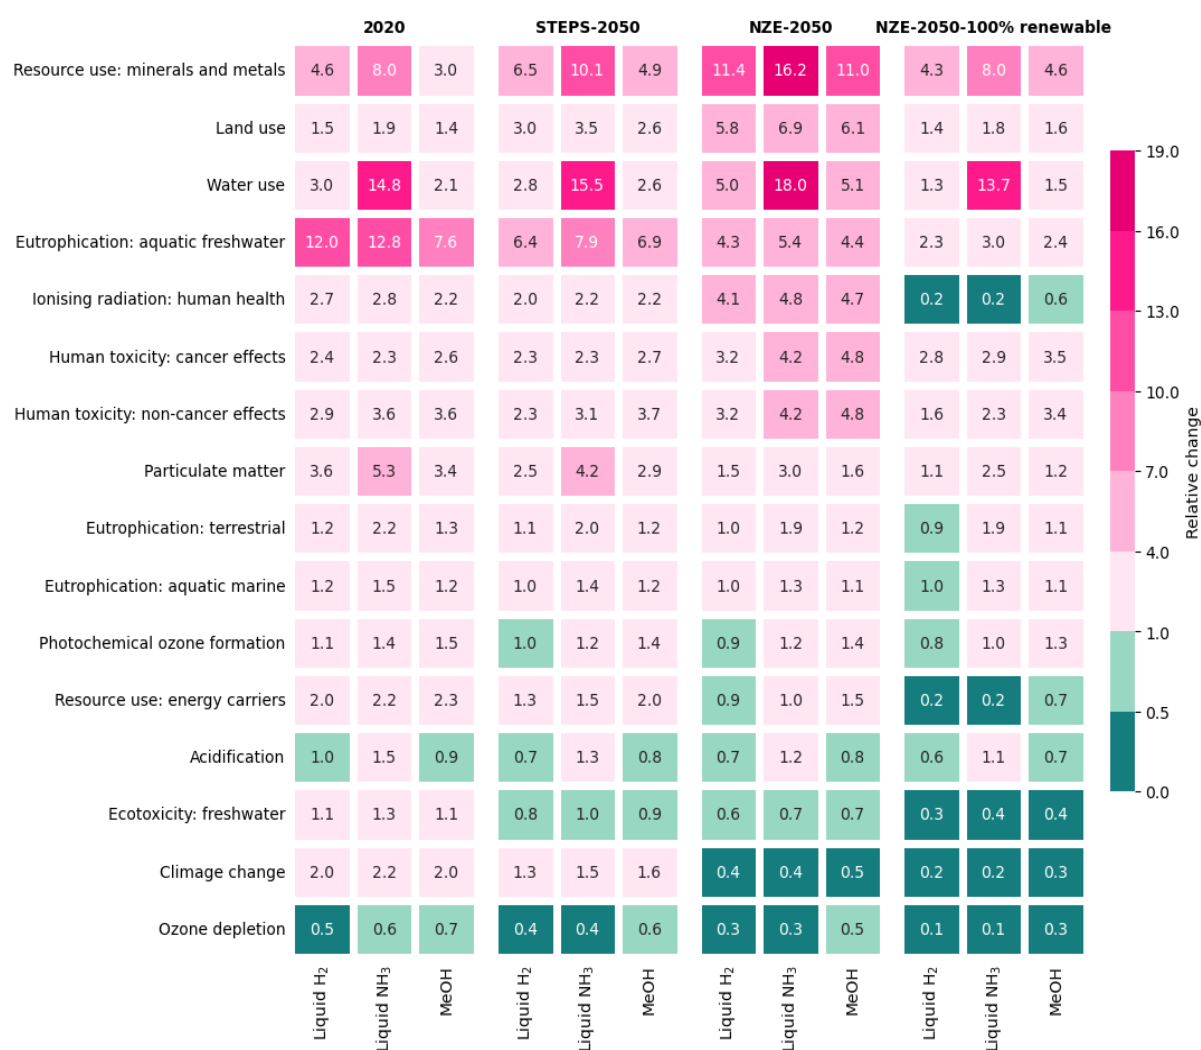


Figure 3.5. Environmental tradeoffs of H₂-based ships in different scenarios from 2020 to 2050 in the S-A-N (11000 nm-20 knots-Nonstop) scenario. The value represents the ratio of the environmental impact of H₂-based ships to that of the HFO ship. Note the nature of the scale: impact reductions are values in between 0 and 1, while impact increases are values from >1 to infinity.

3.4 Conclusions

In this study, by integrating the design for a typical Post-Panamax container ship with broader energy scenarios, the life cycle environmental impacts of using H₂-based fuels in internal combustion engines from 2020 to 2050 are quantified and compared with conventional HFO. The assessment framework established in this study comprehensively accounts for the impacts of H₂-based fuel use on cargo capacity changes, ship operation mode variations, and the decarbonization of electricity and H₂ markets. The results can provide policymakers with a more comprehensive view of the environmental benefits and risks associated with decarbonization through H₂-based fuels. The main conclusions are as follows:

The impact of using H₂-based fuels on ship cargo capacity depends on the ship's range and fuel choice. For trips without any interim stops to refuel, using H₂-based fuels for container ships always requires sacrificing cargo space and weight, regardless of the fuel choice. This can result in a reduction of up to 10% in cargo space and 12% in cargo weight on a typical single trip without stop. Unless freight rates are sufficiently high to compensate for this effect, ship operations could become uneconomical. Specifically, liquid H₂ ships need to increase freight rates based on cargo volume, while liquid NH₃ and MeOH ships need to enhance rates based on cargo weight. When interim refueling is available, liquid NH₃ and MeOH ships can recover some cargo space. When using H₂-based fuels in internal combustion engines to decarbonize container ships, adjusting the operating mode and selecting appropriate fuel types are necessary to balance economic benefits.

H₂-based fuels could reduce GHG emissions from container ships by up to 65% by 2050 under the NZE scenario, and by more than 80% under a 100%-renewables scenario. The source of H₂ supply is a crucial factor in determining whether H₂-based ships can effectively reduce GHG emissions compared to HFO ships. According to current policies, H₂-based ships cannot reduce GHG emissions by 2050, but under the NZE scenario with large-scale low-carbon water electrolysis, they could achieve substantial reductions. Among the options, liquid H₂-ICE shows the greatest potential for GHG reduction per t-nm. Moreover, if H₂-based fuels are produced from 100% renewable electricity (here analyzed for onshore wind power), GHG emissions could be reduced by up to 82%. Lowering ship speeds and incorporating interim refueling can further reduce GHG emissions, though their impact diminishes as H₂-based fuels become cleaner. From a long-term perspective, prioritizing the decarbonization of H₂ supply through water electrolysis over CCS is crucial for achieving deep decarbonization in shipping.

H₂-based fuels come with other environmental trade-offs compared to HFO, and these impacts need to be minimized. Decarbonizing containerships by replacing HFO with H₂-based fuels consistently reduces environmental impacts such as freshwater ecotoxicity and ozone depletion. However, H₂-based fuels tend to increase environmental

burdens across most assessed categories, with metal and mineral use being the most significant due to reliance on renewables and water electrolysis. For eutrophication, human toxicity with non-cancer effects, and particulate matter formation, the main contributors are pollutants associated with the production of copper, aluminium, steel, and multicrystalline silicon wafers used in renewable electricity equipment. Human toxicity with cancer effects is further influenced by the production of alloyed steel in ship production. These impacts should be mitigated through the development of advanced, efficient, and cost-effective pollutant removal technologies targeting these key materials.

Overall, achieving deep decarbonization of container ships with H₂-based fuels in ICEs requires water electrolysis sourced from renewables to develop faster than in the NZE roadmap, while carefully considering environmental trade-offs.