

# ANALECTA PRAEHISTORICA LEIDENSIA

# 28

PUBLICATIONS OF THE INSTITUTE OF PREHISTORY  
UNIVERSITY OF LEIDEN

## INTERFACING THE PAST

COMPUTER APPLICATIONS AND QUANTITATIVE  
METHODS IN ARCHAEOLOGY CAA95 VOL. II

EDITED BY  
HANS KAMERMANS AND KELLY FENNEMA



UNIVERSITY OF LEIDEN 1996

Graphic design: Henk de Lorm

Computer graphics: Peter Heavens

Copy editor: Marianne Wanders

Copyright 1996 by the Institute of Prehistory, Leiden

ISSN 0169-7447

ISBN 90-73368-10-3

Subscriptions to the series *Analecta Praehistorica Leidensia* and single volumes can be ordered from:

Institute of Prehistory  
P.O. Box 9515  
2300 RA Leiden  
The Netherlands

## contents

### VOLUME I

Hans Kamermans  
Kelly Fennema

Preface

#### Data Management

Jens Andresen  
Torsten Madsen

IDEA – the Integrated Database for Excavation Analysis 3

Peter Hinge

The Other Computer Interface 15

Thanasis Hadzilacos  
Polyxeni Myladié Stoumbou

Conceptual Data Modelling for Prehistoric Excavation Documentation 21

E. Agresti  
A. Maggiolo-Schettini  
R. Saccoccio  
M. Pierobon  
R. Pierobon-Benoit

Handling Excavation Maps in SYSAND 31

Alaine Lamprell  
Anthea Salisbury  
Alan Chalmers  
Simon Stoddart

An Integrated Information System for Archaeological Evidence 37

Jon Holmen  
Espen Uleberg

The National Documentation Project of Norway – the Archaeological sub-project 43

Irina Oberländer-Târnoveanu

Statistical view of the Archaeological Sites Database 47

Nigel D. Clubb  
Neil A.R. Lang

A Strategic Appraisal of Information Systems for Archaeology and Architecture in England – Past, Present and Future 51

Nigel D. Clubb  
Neil A.R. Lang

Learning from the achievements of Information Systems – the role of the Post-Implementation Review in medium to large scale systems 73

Neil Beagrie

Excavations and Archives: Alternative Aspects of Cultural Resource Management 81

Mark Bell  
Nicola King

The MARS Project – an interface with England's past 87

**Archaeometry**

- M.J. Baxter  
H.E.M. Cool  
M.P. Heyworth  
Detecting Unusual Multivariate Data: An Archaeometric Example 95
- Jon Bradley  
Mike Fletcher  
Extraction and visualisation of information from ground penetrating radar surveys 103
- Gayle T. Allum  
Robert G. Aykroyd  
John G.B. Haigh  
Restoration of magnetometry data using inverse-data methods 111
- W. Neubauer  
P. Melichar  
A. Eder-Hinterleitner  
Collection, visualization and simulation of magnetic prospection data 121
- A. Eder-Hinterleitner  
W. Neubauer  
P. Melichar  
Reconstruction of archaeological structures using magnetic prospection 131
- Phil Perkins  
An image processing technique for the suppression of traces of modern agricultural activity in aerial photographs 139
- Statistics and Classification**
- Clive Orton  
Markov models for museums 149
- Juan A. Barceló  
Heuristic classification and fuzzy sets. New tools for archaeological typologies 155
- Kris Lockyear  
Dmax based cluster analysis and the supply of coinage to Iron Age Dacia 165
- Christian C. Beardah  
Mike J. Baxter  
MATLAB Routines for Kernel Density Estimation and the Graphical Representation of Archaeological Data 179
- John W.M. Peterson  
A computer model of Roman landscape in South Limburg 185
- Sabine Reinhold  
Time versus Ritual – Typological Structures and Mortuary Practices in Late Bronze/Early Iron Age Cemeteries of North-East Caucasia ('Koban Culture') 195
- Leonardo García Sanjuán  
Jesús Rodríguez López  
Predicting the ritual? A suggested solution in archaeological forecasting through qualitative response models 203
- Johannes Müller  
The use of correspondence analysis for different kinds of data categories: Domestic and ritual Globular Amphorae sites in Central Germany 217
- J. Steele  
T.J. Sluckin  
D.R. Denholm  
C.S. Gamble  
Simulating hunter-gatherer colonization of the Americas 223

- Paul M. Gibson                      An Archaeofaunal Ageing Comparative Study into the Performance of Human Analysis Versus Hybrid Neural Network Analysis    229
- Peter Durham                      Image Processing Strategies for Artefact Classification    235  
     Paul Lewis  
     Stephen J. Shennan
- Gijsbert R. Boekschoten            A new tool for spatial analysis: "Rings & Sectors plus Density Analysis and Trace lines"    241  
     Dick Stapert
- Susan Holstrom Loving            Estimating the age of stone artifacts using probabilities    251
- Oleg Missikoff                    Application of an object-oriented approach to the formalization of qualitative (and quantitative) data    263

## VOLUME II

### Geographic Information Systems I

- David Wheatley                    Between the lines: the role of GIS-based predictive modelling in the interpretation of extensive survey data    275
- Roger Martlew                    The contribution of GIS to the study of landscape evolution in the Yorkshire Dales, UK    293
- Vincent Gaffney                    Extending GIS Methods for Regional Archaeology: the Wroxeter Hinterland Project    297  
     Martijn van Leusen
- Trevor M. Harris                    Multi-dimensional GIS: exploratory approaches to spatial and temporal relationships within archaeological stratigraphy    307  
     Gary R. Lock
- Philip Verhagen                    The use of GIS as a tool for modelling ecological change and human occupation in the Middle Aguas Valley (S.E. Spain)    317
- Federica Massagrande            The Romans in southwestern Spain: total conquest or partial assimilation? Can GIS answer?    325
- Shen Eric Lim                      Recent examples of geographical analysis of archaeological evidence from central Italy    331  
     Simon Stoddart  
     Andrew Harrison  
     Alan Chalmers
- Vincent Gaffney                    Satellite Imagery and GIS applications in Mediterranean Landscapes    337  
     Krištof Oštir  
     Tomaž Podobnikar  
     Zoran Staničič
- Yvette Bommeljé                    The long and winding road: land routes in Aetolia (Greece) since Byzantine times    343  
     Peter Doorn

- Javier Baena Preysler      Application of GIS to images and their processing: the Chiribiquete Mountains Project   353  
 Concepción Blasco

### **Geographic Information Systems II: The York Applications**

- Julian D. Richards      From Site to Landscape: multi-level GIS applications in archaeology   361
- Harold Mytum      Intrasite Patterning and the Temporal Dimension using GIS: the example of Kellington Churchyard   363
- A. Paul Miller      Digging deep: GIS in the city   369
- Julian D. Richards      Putting the site in its setting: GIS and the search for Anglo-Saxon settlements in Northumbria   379
- Jeffrey A. Chartrand      Archaeological Resource Visibility and GIS: A case study in Yorkshire   389

### **Visualisation**

- John Wilcock      A description of the display software for Stafford Castle Visitor Centre, UK   405
- Christian Menard      Pictorial, Three-dimensional Acquisition of Archaeological Finds as Basis for an  
 Robert Sablatnig      Automatic Classification   419
- Katalin T. Biró      Simple fun – Interactive computer demonstration program on the exhibition of the Szentgál-Tűzköveshegy prehistoric industrial area   433
- György Csáki      Documentation and modelling of a Roman imperial villa in Central Italy   437  
 Ferenc Redő
- Maurizio Forte      Archaeology, GIS and desktop virtual reality: the ARCTOS project   443  
 Antonella Guidazzoli
- Germà Wünsch      Dissecting the palimpsest: an easy computer-graphic approach to the stratigraphic  
 Elisabet Arasa      sequence of Túnel VII site (Tierra del Fuego, Argentina)   457  
 Marta Pérez
- David Gilman Romano      Remote Sensing and GIS in the Study of Roman Centuriation in the Corinthia, Greece   461  
 Osama Tolba
- F.J. Baena      An application of GIS intra-site analysis to Museum Display   469  
 F. Quesada  
 M.C. Blasco

### **Education and Publication**

- Robin B. Boast      Teaching with objects   479  
 Sam J. Lucy

Martin Belcher Alan Chalmers Andrew Harrison Simon Stoddart	Teaching the Visualisation of Landscapes – Approaches in Computer based learning for Archaeologists 487
Anja C. Wolle Stephen J. Shennan	A Tool for Multimedia Excavation Reports – a prototype 493
G. Gyftodimos D. Rigopoulos M. Spiliopoulou	Exploring Archaeological Information through an Open Hypermedia System 501
Martijn van Leusen Sara Champion Jonathan Lizée Thomas Plunkett	Toward a European Archaeological Heritage Web 511
Mike Heyworth Seamus Ross Julian Richards	Internet archaeology: an international electronic journal for archaeology 521
Virgil Mihailescu-Bîrliba Vasile Chirica	A Survey of the Development of Computer Applications in Romanian Archaeology 529
Kris Lockyear	Computer-aided publication in practice 535

Shen Eric Lim  
Simon Stoddart  
Andrew Harrison  
Alan Chalmers

## Recent examples of geographical analysis of archaeological evidence from central Italy

### 1 Introduction

Geographical information systems have undergone a very great expansion in archaeology during recent years (Allen *et al.* 1990; Lock/Stančič 1995). Important and recent advances in the capabilities of GIS software have opened up new possibilities for data analysis and display. For example, developments in visualisation techniques (McLaren/Kennie 1989; Visvalingham 1994) have provided new approaches in a variety of application areas including archaeology.

The expansion has three, amongst other, important characteristics and concomitant questions. Firstly, readily available GIS software packages, requiring relatively cheap hardware (e.g., PCs), have both facilitated and constrained archaeological use. The packages have been developed for non-archaeological use where, for instance, time is often of a different order of magnitude. Are the current GIS packages entirely suitable for archaeology given their original aims? Secondly, certain assumptions of scale are made in building environmental and archaeological databases for analysis by GIS. For example, the extent to which DEMs provide an adequate realisation of the terrain of a site depends on the availability and characteristics of the original source material (i.e. maps or aerial photographs). How should archaeologists assess the relevant scale for the implementation of a particular project? Thirdly, GIS software has considerably aided the rapid assessment of theoretical questions of a broadly environmental and technological type which were prominent in the 1960s. The data sources are physically and environmentally deterministic and many approaches are technologically deterministic in the way in which certain GIS packages force the use of particular routines/algorithms. In the meantime, archaeological theory has begun to stress other, ideological, dimensions. Can GIS techniques address these more ideological questions?

This paper addresses these three issues in the light of two projects undertaken at the University of Bristol. The first was a project in the Department of Computing Science undertaken to develop a set of bespoke software tools for the exploratory analysis of archaeological and environmental data from the Valley of Gubbio whose first stage has already been published (Malone/Stoddart 1994) and whose

analysis is now entering the secondary stage. The second was the work involved in preparing data for a TLTP (Teaching and Learning Technology Programme) project to aid the teaching of GIS, drawing on data from the Nepi area of southeast Etruria, 40 km north of Rome. This is in turn part of a longer term project covering the re-analysis of settlement from a larger area of southeast Etruria, drawing from material collected by the British School at Rome and the Soprintendenza Archeologica per l'Etruria Meridionale.

### 2 Strategies towards increased flexibility: The Gubbio example

The data for the survey of the Gubbio valley have been published in the form of distribution maps of discrete sites, alongside excavation results, environmental analysis and overall interpretation of the Gubbio valley in comparison with other areas of central Italy (Malone/Stoddart 1994). As outlined in the introduction to the publication, this does not do justice to the information available either from the archaeological or environmental survey. The trial project proposed within computer science was to set up a flexible and interactive system to explore the relationship between pedology and densities of archaeological artefacts (as opposed to discrete sites). As currently implemented the application is relatively simple and allows the overlaying of different types of maps and the graphical representation of frequency of site finds against landscape characteristics.

The aim was to develop a prototype system which would provide a test bed for investigating extensions to the GIS capabilities available in commercial systems. In most cases these existing systems have not been developed with the needs of the archaeological user in mind. For this reason, there is a requirement to specify and implement a set of customised tools for data analysis and display to support archaeological investigations. An important feature of our approach is the opportunity it provides for an archaeologist, computer scientist and geographer to work together in an interdisciplinary framework to develop new techniques for geographical analysis of archaeological data. An important element of this approach is the use of a prototype system to demonstrate these techniques and facilitate communication between potential users and system developers.



## 2.1 SPECIFICATION FOR THE GUBBIO EXERCISE

A trial area of the archaeological survey was selected for preliminary examination. Environmental data were supplied for the purposes of this exercise in two forms: contour maps and pedological maps. Archaeological data were supplied in the form of quantities of recovered material from point coordinates which represent an area. The full detail allowed by the field survey collection strategy can be incorporated at a later stage.

These different arrays of information were to be overlaid on top of each other, allowing comparison of archaeological and environmental data. The environmental data can be divided (although not entirely independent) into topographical (height, aspect and gradient) and pedological (soil type, drainage etc.). The maps were to be rescaled and histograms were to be calculated which show these relationships. Figure 1 shows a histogram of finds at different contour levels.

## 2.2 IMPLEMENTATION

The prototype system is PC based, operating under Windows and developed in C++. The user interface is shown in figure 2. An important aspect of the system is the design of this user interface which enables an intuitive easy-to-use point-and-click interface for most of the system functions. Despite recent advances in GIS software, many

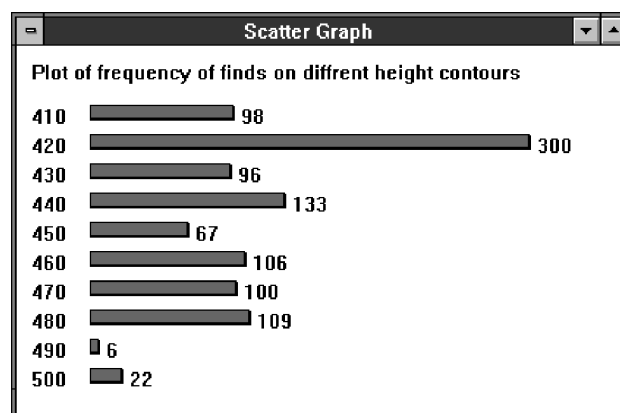


Figure 1. Frequency graph of finds at different contour levels.

commercial systems still make extensive use of command languages in which the user has to enter keywords and parameters via the keyboard. The approach developed here makes full use of an object-orientated language within a Windows environment in an attempt to maximise use in an intuitive and fully interactive manner. The use of a graphical user interface (GUI) and visual programming elements allows the user to interact more naturally with complex spatial data such as landscape models.

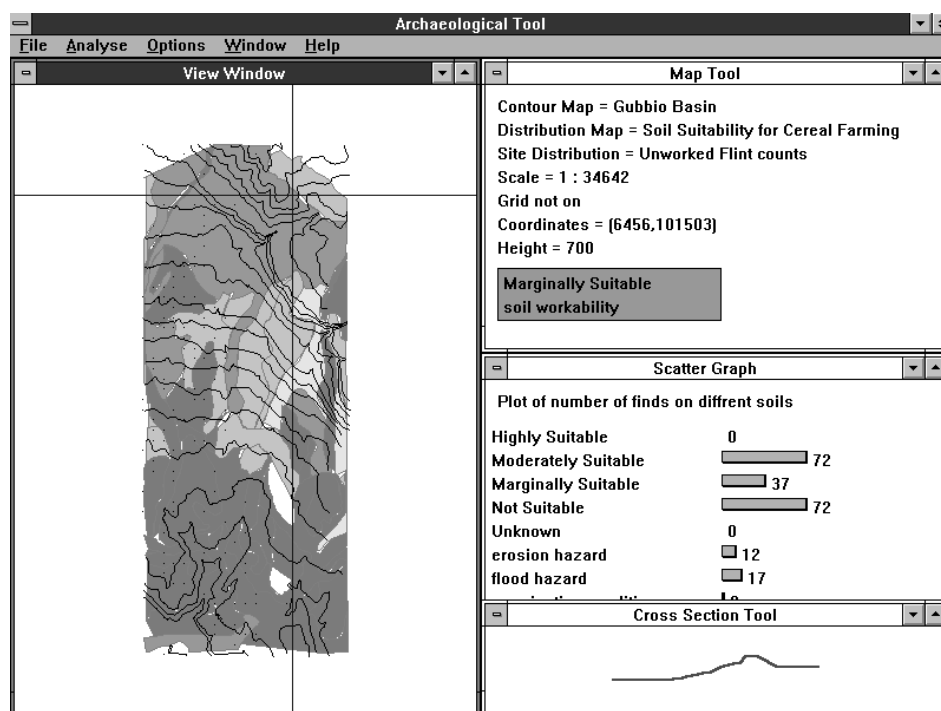


Figure 2. System for analysing information from the Gubbio region.

The limited amount of resources available for the development of this system to date means that we have focused on illustrating a series of possibilities, to stimulate further discussion of the possible uses of GIS in archaeological analysis, rather than concentrating on the development of a polished software system. The system currently scales and rotates maps and plots artefact locations following parameters determined by the operator, as illustrated in figure 3. This is an ongoing project where it is our intention to explore varied presentations of DEMs, with interactive control of interpolation, aspect, gradient and visibility, and to introduce specific types of statistical analysis.

### 3 Strategies towards appropriate scale and ideological analysis: The Nepi example

The grand scale of the study of the South Etruria area is to visualise a changing political landscape over time principally from the middle of the second millennium through a series of major changes: Etruscan and Faliscan state formation, conquest by the Roman Empire, the decline of late Antiquity and the resurgence of the Middle Ages. The specific case study derives from an early stage in this process adopted for teaching purposes in the tutorial of GIS for a nationally funded UK computer aided teaching programme.

The Nepi dataset is characterised by two important facets: a fragmented terrain and a rich, but unsystematic, settlement dataset. The Nepi landscape is volcanic and

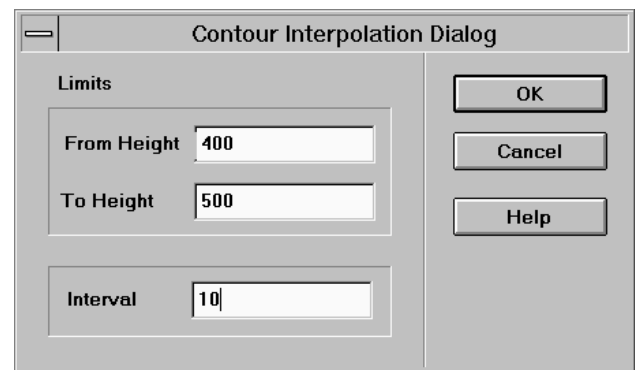


Figure 3. Contour interpolation dialogue box.

dissected. The accuracy of the terrain model is therefore crucial. Horizontal distance is no measure of the physical effort in crossing terrain. The volcanic plateaux are apparently flat, but slight differences in height can also have a major effect on intervisibility. The dataset is rich, although in need of considerable data verification. One aspect of the richness is the presence of tomb as well as settlement data. These data have been usually collected by different strategies to the settlement data, but once integrated may allow a new dimension of analysis. It is well known that pre-Roman tombs were placed in visible positions outside towns, but geographical analysis might allow a more detailed analysis of this phenomenon.

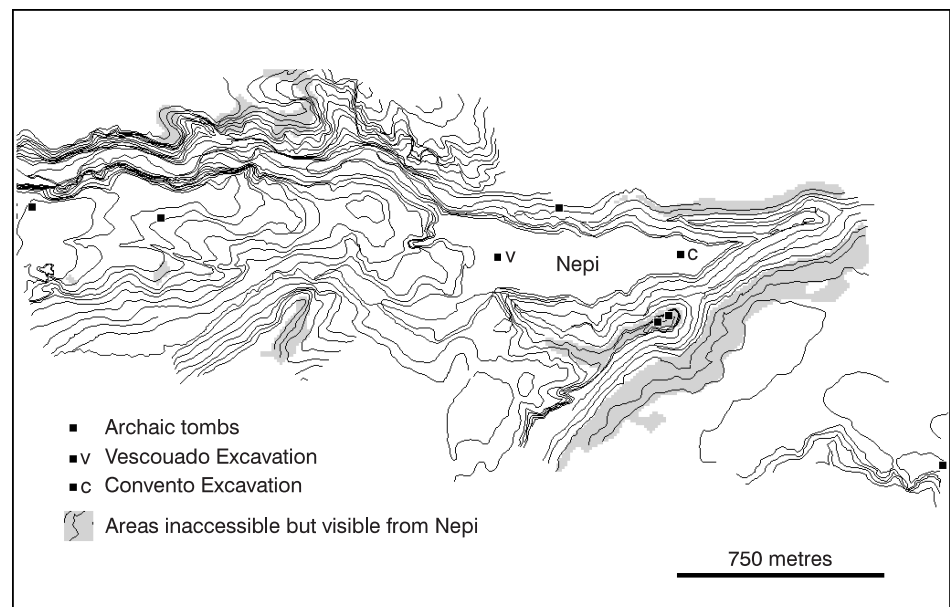


Figure 4. Location of tombs in zones of visibility and inaccessibility.

### 3.1 PROBLEMS OF SCALE

In work on the Nepi dataset, considerable effort was devoted to the elaboration of height data at an appropriate scale. This becomes very important when visibility in this terrain is highly sensitive to small changes in height. The problem in assessing the scale for the analysis became particularly prominent given the difficulty of securing suitable maps which could answer the questions posed by a rich, but methodologically complex dataset. Satellite data are expensive and not necessarily sensitive to the needs of micro-analysis of site location. The most detailed digital data are available at 1:25,000 but still not necessarily sufficiently sensitive and also costly. One approach is to build up coverage from locally available maps at scales of 1:2000 - 1:4000 with concomitant problems of edge matching and error checking. Problems also had to be addressed in replacing cartographic symbols of significant drops in height over short horizontal distances (ravine edges) by digital data. A more satisfactory solution is to constitute the DEM from aerial photographic data, using photogrammetric software and this is currently being investigated.

### 3.2 IDEOLOGY

The rich dataset of tomb and settlement data can be played against each other. Figure 4 shows the concurrence of inaccessibility and visibility from the town at certain points in the landscape. These zones correlate very strongly with the presence of tombs which have a liminal quality in the ideology of the pre-Roman period. More detailed analysis on a broader landscape will allow the precise quantification of this relationship, drawing in minor settlements and roads into the equation.

## 4 Conclusion

These examples illustrate the need to increase interactivity, sensitivity to scale and broadening of the scope of GIS to less strictly environmental questions. New steps can only be provided by increasing the communication between specialists in different fields of activity and ensuring their mutual understanding.

### Acknowledgements

Vanessa Blake is the author of the Toolbook application of the Nepi data.

## references

- Allen, K.  
S. Green  
E. Zubrow (eds)  
1990     *Interpreting space: GIS and archaeology*. London: Taylor & Francis.
- Lock, G.R.  
Z. Stančić (eds)  
1995     *Archaeology and Geographical Information Systems: A European Perspective*. London: Taylor & Francis.
- Malone, C.A.T.  
S.K.F. Stoddart (eds)  
1994     *Territory, Time and State. The archaeological history of the Gubbio valley*. Cambridge: Cambridge University Press.
- McLaren, A.  
T.J.M. Kennie  
1989     Visualisations of digital elevation models: techniques and applications. In: J. Raper (ed.), *Three dimensional applications of GIS*, 79-98, London: Taylor & Francis.
- Visvalingham, M.  
1994     Visualisation in GIS, cartography and ViSC. In: H.M. Heanshaw/D.J. Unwin (eds) *Visualisation in geographical information systems*, 18-25, Chichester: Wiley.

Shen Eric Lim  
Department of Computer Science  
University of Bristol.

Simon Stoddart  
Department of Classics & Archaeology  
University of Bristol.  
e-mail: s.k.stoddart@bristol.ac.uk

Andrew Harrison  
Department of Geography  
University of Bristol.

Alan Chalmers  
Department of Computer Science  
University of Bristol  
United Kingdom  
e-mail: alan@compsci.bristol.ac.uk