



Universiteit
Leiden

The Netherlands

The state of the earth: estimating physical parameters from noisy and incomplete earth observation data

Arp, L.R.

Citation

Arp, L. R. (2026, June 23). *The state of the earth: estimating physical parameters from noisy and incomplete earth observation data*. Retrieved from <https://hdl.handle.net/1887/4306907>

Version: Publisher's Version

License: [Licence agreement concerning inclusion of doctoral thesis in the Institutional Repository of the University of Leiden](#)

Downloaded from: <https://hdl.handle.net/1887/4306907>

Note: To cite this publication please use the final published version (if applicable).

BIBLIOGRAPHY

- [1] OP Hasekamp and J Landgraf. “A linearized vector radiative transfer model for atmospheric trace gas retrieval”. In: *Journal of Quantitative Spectroscopy and Radiative Transfer* 75.2 (2002), pp. 221–238 (cit. on pp. 1, 19, 183).
- [2] D Schepers, JMJ Aan de Brugh, Ph Hahne, A Butz, OP Hasekamp, and J Landgraf. “LINTRAN v2. 0: A linearised vector radiative transfer model for efficient simulation of satellite-born nadir-viewing reflection measurements of cloudy atmospheres”. In: *Journal of Quantitative Spectroscopy and Radiative Transfer* 149 (2014), pp. 347–359 (cit. on pp. 1, 19, 183).
- [3] Lise Kilic, Catherine Prigent, Jacqueline Boutin, Thomas Meissner, Stephen English, and Simon Yueh. “Comparisons of ocean radiative transfer models with SMAP and AMSR2 observations”. In: *Journal of Geophysical Research: Oceans* 124.11 (2019), pp. 7683–7699 (cit. on pp. 1, 19, 183).
- [4] Stéphane Jacquemoud, Wout Verhoef, Frédéric Baret, Cédric Bacour, Pablo J. Zarco-Tejada, Gregory P. Asner, Christophe François, and Susan L. Ustin. “PROSPECT+SAIL models: A review of use for vegetation characterization”. In: *Remote Sensing of Environment* 113 (2009), S56–S66 (cit. on pp. 1, 19).
- [5] Siddharth Mishra-Sharma. “Inferring dark matter substructure with astrometric lensing beyond the power spectrum”. In: *Machine Learning: Science and Technology* 3.1 (2022), 01LT03 (cit. on pp. 3, 126, 129).
- [6] Xiaosheng Zhao, Yi Mao, Cheng Cheng, and Benjamin D Wandelt. “Simulation-based inference of reionization parameters from 3D tomographic 21 cm light-cone images”. In: *The Astrophysical Journal* 926.2 (2022), p. 151 (cit. on pp. 3, 126, 129).
- [7] Jacques-Donald Tournier, Susumu Mori, and Alexander Leemans. “Diffusion tensor imaging and beyond”. In: *Magnetic resonance in medicine* 65.6 (2011), p. 1532 (cit. on p. 3).
- [8] Jeff Kershaw, Babak A Ardekani, and Iwao Kanno. “Application of Bayesian inference to fMRI data analysis”. In: *IEEE Transactions on Medical Imaging* 18.12 (1999), pp. 1138–1153 (cit. on p. 3).

- [9] Jana Lipková, Panagiotis Angelikopoulos, Stephen Wu, Esther Alberts, Benedikt Wiestler, Christian Diehl, Christine Preibisch, Thomas Pyka, Stephanie E Combs, Panagiotis Hadjidoukas, et al. “Personalized radiotherapy design for glioblastoma: integrating mathematical tumor models, multimodal scans, and Bayesian inference”. In: *IEEE Transactions on Medical Imaging* 38.8 (2019), pp. 1875–1884 (cit. on p. 3).
- [10] Jin Chen, Xiaolin Zhu, James E Vogelmann, Feng Gao, and Suming Jin. “A simple and effective method for filling gaps in Landsat ETM+ SLC-off images”. In: *Remote Sensing of Environment* 115.4 (2011), pp. 1053–1064 (cit. on pp. 4, 64, 79).
- [11] F L Naus, D van Gils, and T J Brussée. *Status and trend of the shallow and medium-deep groundwater quality in the Netherlands as measured by the National Groundwater Quality Monitoring Network*. 2023 (cit. on p. 12).
- [12] Korean Ministry of Environment. *AIRKOREA*, <https://www.airkorea.or.kr>. 2005 (cit. on p. 12).
- [13] National Research Institute for Earth Science and Disaster Resilience (NIED). *Kyoshin Network (K-NET)*. 2008. URL: <https://www.kyoshin.bosai.go.jp/> (cit. on p. 12).
- [14] National Ecological Observatory Network (NEON). *NEON Data Portal*. 2012. URL: <https://data.neonscience.org/> (cit. on p. 12).
- [15] B Fraters, A E J Hooijboer, G B J Rijs, N van Duijnhoven, and J C Rozemeijer. *Waterkwaliteit in Nederland; toestand (2012–2015) en trend (1992–2015)*. 2016 (cit. on p. 12).
- [16] European Commission. *Copernicus Sentinel Data Access Annual Report 2023*. Tech. rep. European Commission, 2024 (cit. on p. 14).
- [17] Fuzhen Zhuang, Zhiyuan Qi, Keyu Duan, Dongbo Xi, Yongchun Zhu, Hengshu Zhu, Hui Xiong, and Qing He. “A comprehensive survey on transfer learning”. In: *Proceedings of the IEEE* 109.1 (2020), pp. 43–76 (cit. on p. 15).
- [18] Yoshua Bengio, Aaron Courville, and Pascal Vincent. “Representation learning: A review and new perspectives”. In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* 35.8 (2013), pp. 1798–1828 (cit. on p. 15).
- [19] Phuc H Le-Khac, Graham Healy, and Alan F Smeaton. “Contrastive representation learning: A framework and review”. In: *IEEE Access* 8 (2020), pp. 193907–193934 (cit. on p. 15).
- [20] Jesper E Van Engelen and Holger H Hoos. “A survey on semi-supervised learning”. In: *Machine Learning* 109.2 (2020), pp. 373–440 (cit. on p. 15).

- [21] Longlong Jing and Yingli Tian. “Self-supervised visual feature learning with deep neural networks: A survey”. In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* 43.11 (2020), pp. 4037–4058 (cit. on p. 15).
- [22] Yezhen Cong, Samar Khanna, Chenlin Meng, Patrick Liu, Erik Rozi, Yutong He, Marshall Burke, David B. Lobell, and Stefano Ermon. “SatMAE: Pre-training Transformers for Temporal and Multi-Spectral Satellite Imagery”. In: *Advances in Neural Information Processing Systems*. Ed. by Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho. 2022. URL: <https://openreview.net/forum?id=WBhqzpF6KYH> (cit. on p. 15).
- [23] Johannes Jakubik, Sujit Roy, C. E. Phillips, Paolo Fraccaro, Denys Godwin, Bianca Zadrozny, Daniela Szwarzman, Carlos Gomes, Gabby Nyirjesy, Blair Edwards, Daiki Kimura, Naomi Simumba, Linsong Chu, S. Karthik Mukkavilli, Devyani Lambhate, Kamal Das, Ranjini Bangalore, Dario Oliveira, Michal Muszynski, Kumar Ankur, Muthukumaran Ramasubramanian, Iksha Gurning, Sam Khallaghi, Hanxi (Steve) Li, Michael Cecil, Maryam Ahmadi, Fatemeh Kordi, Hamed Alemohammad, Manil Maskey, Raghu Ganti, Kommy Weldemariam, and Rahul Ramachandran. “Foundation Models for Generalist Geospatial Artificial Intelligence”. In: *Preprint Available on arxiv:2310.18660* (Oct. 2023) (cit. on p. 15).
- [24] Casper Fibaek, Luke Camilleri, Andreas Luyts, Nikolaos Dionelis, and Bertrand Le Saux. *Phileo Bench: Evaluating Geo-Spatial Foundation Models*. 2024. arXiv: [2401.04464](https://arxiv.org/abs/2401.04464) [cs.CV] (cit. on p. 15).
- [25] Gencer Sumbul, Marcela Charfuelan, Begüm Demir, and Volker Markl. “BigEarth-Net: A large-scale benchmark archive for remote sensing image understanding”. In: *IEEE International Geoscience and Remote Sensing Symposium*. IEEE. 2019, pp. 5901–5904 (cit. on p. 15).
- [26] Ava Vali, Sara Comai, and Matteo Matteucci. “Deep learning for land use and land cover classification based on hyperspectral and multispectral earth observation data: A review”. In: *Remote Sensing* 12.15 (2020), p. 2495 (cit. on p. 15).
- [27] Thorsten Hoeser and Claudia Kuenzer. “Object detection and image segmentation with deep learning on earth observation data: A review-part i: Evolution and recent trends”. In: *Remote Sensing* 12.10 (2020), p. 1667 (cit. on p. 15).
- [28] Alistair Francis, Panagiotis Sidiropoulos, and Jan-Peter Muller. “CloudFCN: Accurate and robust cloud detection for satellite imagery with deep learning”. In: *Remote Sensing* 11.19 (2019), p. 2312 (cit. on p. 15).

- [29] Alistair Francis. “Sensor independent cloud and shadow masking with partial labels and multimodal inputs”. In: *IEEE Transactions on Geoscience and Remote Sensing* (2024) (cit. on pp. 15, 64, 77, 81).
- [30] Alexander A Gilerson, Anatoly A Gitelson, Jing Zhou, Daniela Gurlin, Wesley Moses, Ioannis Ioannou, and Samir A Ahmed. “Algorithms for remote estimation of chlorophyll-a in coastal and inland waters using red and near infrared bands”. In: *Optics Express* 18.23 (2010), pp. 24109–24125 (cit. on p. 15).
- [31] Jianfeng Zhang, Wenting Han, Lvwen Huang, Zhiyong Zhang, Yimian Ma, and Yamin Hu. “Leaf chlorophyll content estimation of winter wheat based on visible and near-infrared sensors”. In: *Sensors* 16.4 (2016), p. 437 (cit. on p. 15).
- [32] O Torres, PK Bhartia, JR Herman, Z Ahmad, and J Gleason. “Derivation of aerosol properties from satellite measurements of backscattered ultraviolet radiation: Theoretical basis”. In: *Journal of Geophysical Research: Atmospheres* 103.D14 (1998), pp. 17099–17110 (cit. on p. 15).
- [33] Maziar Raissi, Paris Perdikaris, and George E Karniadakis. “Physics-informed neural networks: A deep learning framework for solving forward and inverse problems involving nonlinear partial differential equations”. In: *Journal of Computational Physics* 378 (2019), pp. 686–707 (cit. on pp. 17, 181).
- [34] Salvatore Cuomo, Vincenzo Schiano Di Cola, Fabio Giampaolo, Gianluigi Rozza, Maziar Raissi, and Francesco Piccialli. “Scientific machine learning through physics-informed neural networks: Where we are and what’s next”. In: *Journal of Scientific Computing* 92.3 (2022), p. 88 (cit. on p. 17).
- [35] Jochem Verrelst, Zbyněk Malenovsky, Christiaan Van der Tol, Gustau Camps-Valls, Jean-Philippe Gastellu-Etchegorry, Philip Lewis, Peter North, and Jose Moreno. “Quantifying vegetation biophysical variables from imaging spectroscopy data: A review on retrieval methods”. In: *Surveys in Geophysics* 40 (2019), pp. 589–629 (cit. on pp. 17, 19–20, 98, 108, 144).
- [36] Markus Reichstein, Gustau Camps-Valls, Bjorn Stevens, Martin Jung, Joachim Denzler, Nuno Carvalhais, and F Prabhat. “Deep learning and process understanding for data-driven Earth system science”. In: *Nature* 566.7743 (2019), pp. 195–204 (cit. on pp. 17, 181).
- [37] Alex Krizhevsky, Geoffrey Hinton, et al. *Learning multiple layers of features from tiny images*. 2009 (cit. on p. 17).

- [38] Rosa Maria Cavalli. “Spatial validation of spectral unmixing results: A systematic review”. In: *Remote Sensing* 15.11 (2023), p. 2822 (cit. on pp. 18, 108, 110).
- [39] Michael D King, Steven Platnick, W Paul Menzel, Steven A Ackerman, and Paul A Hubanks. “Spatial and temporal distribution of clouds observed by MODIS onboard the Terra and Aqua satellites”. In: *IEEE Transactions on Geoscience and Remote Sensing* 51.7 (2013), pp. 3826–3852 (cit. on p. 18).
- [40] Andrea Meraner, Patrick Ebel, Xiao Xiang Zhu, and Michael Schmitt. “Cloud removal in Sentinel-2 imagery using a deep residual neural network and SAR-optical data fusion”. In: *ISPRS Journal of Photogrammetry and Remote Sensing* 166 (2020), pp. 333–346 (cit. on pp. 18, 24, 63, 75–76, 79–80, 87, 89, 179).
- [41] Patrick Ebel, Vivien Sainte Fare Garnot, Michael Schmitt, Jan Dirk Wegner, and Xiao Xiang Zhu. “UnCRtainTS: Uncertainty Quantification for Cloud Removal in Optical Satellite Time Series”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2023, pp. 2085–2095 (cit. on pp. 18, 24, 64, 77, 79–80, 84, 88, 178–179).
- [42] Huanfeng Shen, Xinghua Li, Qing Cheng, Chao Zeng, Gang Yang, Huifang Li, and Liangpei Zhang. “Missing information reconstruction of remote sensing data: A technical review”. In: *IEEE Geoscience and Remote Sensing Magazine* 3.3 (2015), pp. 61–85 (cit. on pp. 18, 63, 91).
- [43] Stéphane Jacquemoud and Frédéric Baret. “PROSPECT: A model of leaf optical properties spectra”. In: *Remote Sensing of Environment* 34.2 (1990), pp. 75–91 (cit. on pp. 19, 98, 156).
- [44] Wouter Verhoef. “Light scattering by leaf layers with application to canopy reflectance modeling: The SAIL model”. In: *Remote Sensing of Environment* 16.2 (1984), pp. 125–141 (cit. on pp. 19, 98, 156).
- [45] Nguyen An Binh, Leon T Hauser, Pham Viet Hoa, Giang Thi Phuong Thao, Nguyen Ngoc An, Huynh Song Nhut, Tran Anh Phuong, and Jochem Verrelst. “Quantifying mangrove leaf area index from Sentinel-2 imagery using hybrid models and active learning”. In: *International Journal of Remote Sensing* 43.15-16 (2022), pp. 5636–5657 (cit. on pp. 19–21, 99–100, 127, 130, 144, 175).
- [46] Rabi N Sahoo, Shalini Gakhar, Rajan G Rejith, Jochem Verrelst, Rajeev Rangan, Tarun Kondraju, Mahesh C Meena, Joydeep Mukherjee, Anchal Daas, Sudhir Kumar, et al. “Optimizing the Retrieval of Wheat Crop Traits from UAV-Borne Hyperspectral Image with Radiative Transfer Modelling Using

- Gaussian Process Regression". In: *Remote Sensing* 15.23 (2023), p. 5496 (cit. on pp. 19–20, 100, 122, 127, 130, 160, 175).
- [47] S Jacquemoud, S Flasse, J Verdebout, and G Schmuck. "Comparison of several optimization methods to extract canopy biophysical parameters-application to CAESAR data". In: *International Symposium on Physical Measurements and Signatures* *Signatures in Remote Sensing*. CNES Paris. 1994, pp. 291–298 (cit. on pp. 20, 99, 126, 130).
- [48] K Richter, C Atzberger, F Vuolo, P Weihs, and G d'Urso. "Experimental assessment of the Sentinel-2 band setting for RTM-based LAI retrieval of sugar beet and maize". In: *Canadian Journal of Remote Sensing* 35.3 (2009), pp. 230–247 (cit. on pp. 20, 99, 126, 130).
- [49] S Jacquemoud, C Bacour, H Poilve, and J-P Frangi. "Comparison of four radiative transfer models to simulate plant canopies reflectance: Direct and inverse mode". In: *Remote Sensing of Environment* 74.3 (2000), pp. 471–481 (cit. on pp. 20, 99, 130).
- [50] Nuno Cesar de Sa, Mitra Baratchi, Leon T Hauser, and Peter van Bodegom. "Exploring the impact of noise on hybrid inversion of PROSAIL RTM on Sentinel-2 data". In: *Remote Sensing* 13.4 (2021), p. 648 (cit. on pp. 20, 99, 104, 109, 115, 117, 126, 130, 217).
- [51] Katja Berger, Juan Pablo Rivera Caicedo, Luca Martino, Matthias Wocher, Tobias Hank, and Jochem Verrelst. "A survey of active learning for quantifying vegetation traits from terrestrial Earth observation data". In: *Remote Sensing* 13.2 (2021), p. 287 (cit. on pp. 20–21, 99, 130).
- [52] Gabriele Candiani, Giulia Tagliabue, Cinzia Panigada, Jochem Verrelst, Valentina Picchi, Juan Pablo Rivera Caicedo, and Mirco Boschetti. "Evaluation of hybrid models to estimate chlorophyll and nitrogen content of maize crops in the framework of the future CHIME mission". In: *Remote Sensing* 14.8 (2022), p. 1792 (cit. on pp. 20, 100, 122, 130, 175).
- [53] Marta Rossi, Gabriele Candiani, Francesco Nutini, Marco Gianinetto, and Mirco Boschetti. "Sentinel-2 estimation of CNC and LAI in rice cropping system through hybrid approach modelling". In: *European Journal of Remote Sensing* (2022), pp. 1–20 (cit. on pp. 20, 99, 130, 175).
- [54] Gabriel Caballero, Alejandro Pezzola, Cristina Winschel, Alejandra Casella, Paolo Sanchez Angonova, Juan Pablo Rivera-Caicedo, Katja Berger, Jochem Verrelst, and Jesus Delegido. "Seasonal Mapping of Irrigated Winter Wheat Traits in Argentina with a Hybrid Retrieval Workflow Using Sentinel-2 Imagery". In: *Remote Sensing* 14.18 (2022), p. 4531 (cit. on pp. 20, 99, 127, 130, 160, 175).

- [55] Marina Ranghetti, Mirco Boschetti, Luigi Ranghetti, Giulia Tagliabue, Cinzia Panigada, Marco Gianinetto, Jochem Verrelst, and Gabriele Candiani. “Assessment of maize nitrogen uptake from PRISMA hyperspectral data through hybrid modelling”. In: *European Journal of Remote Sensing* 56.1 (2023), p. 2117650 (cit. on pp. 20, 99, 130, 144, 175).
- [56] Victor Neuteboom. *AutoML for creating hybrid Earth science models*. LIACS, Leiden University, 2022 (cit. on p. 20).
- [57] B Combal, Frédéric Baret, M Weiss, Alain Trubuil, D Macé, A Pragnere, R Myneni, Y Knyazikhin, and L Wang. “Retrieval of canopy biophysical variables from bidirectional reflectance: Using prior information to solve the ill-posed inverse problem”. In: *Remote Sensing of Environment* 84.1 (2003), pp. 1–15 (cit. on pp. 21, 98, 100, 110, 126).
- [58] Jia Sun, Lunche Wang, Shuo Shi, Zhenhai Li, Jian Yang, Wei Gong, Shaoqiang Wang, and Torbern Tagesson. “Leaf pigment retrieval using the PRO-SAIL model: Influence of uncertainty in prior canopy-structure information”. In: *The Crop Journal* 10.5 (2022), pp. 1251–1263 (cit. on pp. 21, 98).
- [59] Xingwen Quan, Binbin He, and Xing Li. “A Bayesian network-based method to alleviate the ill-posed inverse problem: A case study on leaf area index and canopy water content retrieval”. In: *IEEE Transactions on Geoscience and Remote Sensing* 53.12 (2015), pp. 6507–6517 (cit. on pp. 21, 98).
- [60] Sergei Igorevich Kabanikhin. “Definitions and examples of inverse and ill-posed problems”. In: *Journal of Inverse and Ill-posed Problems* (2008) (cit. on p. 21).
- [61] Hyun Jeung Ko and Gerald W Evans. “A genetic algorithm-based heuristic for the dynamic integrated forward/reverse logistics network for 3PLs”. In: *Computers & Operations Research* 34.2 (2007), pp. 346–366 (cit. on p. 22).
- [62] David Meignan, Sigrid Knust, Jean-Marc Frayret, Gilles Pesant, and Nicolas Gaud. “A review and taxonomy of interactive optimization methods in operations research”. In: *ACM Transactions on Interactive Intelligent Systems (TiiS)* 5.3 (2015), pp. 1–43 (cit. on p. 22).
- [63] Roy de Winter, Jan Furustam, Thomas Bäck, and Thijs Muller. “Optimizing ships using the holistic accelerated concept design methodology”. In: *Practical Design of Ships and Other Floating Structures*. Springer, 2019, pp. 38–50 (cit. on p. 22).
- [64] Holger H Hoos and Thomas Stützle. “Stochastic local search”. In: *Handbook of Approximation Algorithms and Metaheuristics*. Chapman and Hall/CRC, 2018, pp. 297–307 (cit. on pp. 23, 105–106, 218).

- [65] Thomas Back. *Evolutionary algorithms in theory and practice: evolution strategies, evolutionary programming, genetic algorithms*. Oxford university press, 1996 (cit. on p. 23).
- [66] James Kennedy and Russell Eberhart. “Particle swarm optimization”. In: *International Conference on Neural Networks*. Vol. 4. ieee. 1995, pp. 1942–1948 (cit. on p. 23).
- [67] Marco Dorigo, Mauro Birattari, and Thomas Stutzle. “Ant colony optimization”. In: *IEEE Computational Intelligence Magazine* 1.4 (2007), pp. 28–39 (cit. on p. 23).
- [68] Bobak Shahriari, Kevin Swersky, Ziyu Wang, Ryan P Adams, and Nando De Freitas. “Taking the human out of the loop: A review of Bayesian optimization”. In: *Proceedings of the IEEE* 104.1 (2015), pp. 148–175 (cit. on p. 23).
- [69] Jean-Bastien Grill, Michal Valko, and Rémi Munos. “Black-box optimization of noisy functions with unknown smoothness”. In: *Advances in Neural Information Processing Systems* 28 (2015) (cit. on p. 23).
- [70] Peter Flach. *Machine Learning: the Art and Science of Algorithms that Make Sense of Data*. Cambridge University Press, 2012 (cit. on p. 23).
- [71] Grant J Scott, Matthew R England, William A Starms, Richard A Marcum, and Curt H Davis. “Training deep convolutional neural networks for land-cover classification of high-resolution imagery”. In: *IEEE Geoscience and Remote Sensing Letters* 14.4 (2017), pp. 549–553 (cit. on p. 24).
- [72] Naftaly Wambugu, Yiping Chen, Zhenlong Xiao, Mingqiang Wei, Saifullahi Aminu Bello, José Marcato Junior, and Jonathan Li. “A hybrid deep convolutional neural network for accurate land cover classification”. In: *International Journal of Applied Earth Observation and Geoinformation* 103 (2021), p. 102515 (cit. on p. 24).
- [73] Shunping Ji, Chi Zhang, Anjian Xu, Yun Shi, and Yulin Duan. “3D convolutional neural networks for crop classification with multi-temporal remote sensing images”. In: *Remote Sensing* 10.1 (2018), p. 75 (cit. on p. 24).
- [74] Keiller Nogueira, Mauro Dalla Mura, Jocelyn Chanussot, William Robson Schwartz, and Jefersson Alex Dos Santos. “Dynamic multicontext segmentation of remote sensing images based on convolutional networks”. In: *IEEE Transactions on Geoscience and Remote Sensing* 57.10 (2019), pp. 7503–7520 (cit. on p. 24).

- [75] Julia Waşala, Suzanne Marselis, Laurens Arp, Holger Hoos, Nicolas Longép  , and Mitra Baratchi. “AutoSR4EO: An AutoML Approach to Super-Resolution for Earth Observation Images”. In: *Remote Sensing* 16.3 (2024), p. 443 (cit. on p. 24).
- [76] Saman Ghaffarian, Jo  o Valente, Mariska Van Der Voort, and Bedir Tekinerdogan. “Effect of attention mechanism in deep learning-based remote sensing image processing: A systematic literature review”. In: *Remote Sensing* 13.15 (2021), p. 2965 (cit. on p. 24).
- [77] Zhi Li, Siying Cao, Jiakun Deng, Fengyi Wu, Ruilan Wang, Junhai Luo, and Zhenming Peng. “STADE-CDNet: Spatial-temporal attention with difference enhancement-based network for remote sensing image change detection”. In: *IEEE Transactions on Geoscience and Remote Sensing* 62 (2024), pp. 1–17 (cit. on p. 24).
- [78] Seyd Teymoor Seydi, Meisam Amani, and Arsalan Ghorbanian. “A dual attention convolutional neural network for crop classification using time-series Sentinel-2 imagery”. In: *Remote Sensing* 14.3 (2022), p. 498 (cit. on p. 24).
- [79] Xin Li, Feng Xu, Linyang Li, Nan Xu, Fan Liu, Chi Yuan, Ziqi Chen, and Xin Lyu. “AAFormer: Attention-attended transformer for semantic segmentation of remote sensing images”. In: *IEEE Geoscience and Remote Sensing Letters* (2024) (cit. on p. 24).
- [80] Pallavi Jain, Dino Ienco, Roberto Interdonato, Tristan Berchoux, and Diego Marcos. “SenCLIP: Enhancing zero-shot land-use mapping for Sentinel-2 with ground-level prompting”. In: *IEEE/CVF Winter Conference on Applications of Computer Vision*. IEEE. 2025, pp. 5656–5665 (cit. on p. 24).
- [81] Jiaxin Li, Danfeng Hong, Lianru Gao, Jing Yao, Ke Zheng, Bing Zhang, and Jocelyn Chanussot. “Deep learning in multimodal remote sensing data fusion: A comprehensive review”. In: *International Journal of Applied Earth Observation and Geoinformation* 112 (2022), p. 102926 (cit. on pp. 24, 179).
- [82] European Union’s Copernicus Land Monitoring Service. *Leaf Area Index 2014-present (raster 300 m), global, 10-daily*. <https://doi.org/10.2909/219fdc9f-616b-444b-a495-198f527b4722>. 2017 (cit. on p. 24).
- [83] Pedro Castro-Valdecantos, Orly Enrique Apolo-Apolo, Manuel P  rez-Ruiz, and G Egea. “Leaf area index estimations by deep learning models using RGB images and data fusion in maize”. In: *Precision Agriculture* 23.6 (2022), pp. 1949–1966 (cit. on p. 24).

- [84] Shuaibing Liu, Xiuliang Jin, Chenwei Nie, Siyu Wang, Xun Yu, Minghan Cheng, Mingchao Shao, Zixu Wang, Nuremanguli Tuohuti, Yi Bai, et al. "Estimating leaf area index using unmanned aerial vehicle data: shallow vs. deep machine learning algorithms". In: *Plant Physiology* 187.3 (2021), pp. 1551–1576 (cit. on p. 24).
- [85] Luis Carrasco, Aneurin W O'Neil, R Daniel Morton, and Clare S Rowland. "Evaluating combinations of temporally aggregated Sentinel-1, Sentinel-2 and Landsat 8 for land cover mapping with Google Earth Engine". In: *Remote Sensing* 11.3 (2019), p. 288 (cit. on p. 28).
- [86] Hongliang Fang, Frédéric Baret, Stephen Plummer, and Gabriela Schaepman-Strub. "An overview of global leaf area index (LAI): Methods, products, validation, and applications". In: *Reviews of Geophysics* 57.3 (2019), pp. 739–799 (cit. on p. 28).
- [87] Guillermo Q Tabios III and Jose D Salas. "A comparative analysis of techniques for spatial interpolation of precipitation 1". In: *JAWRA Journal of the American Water Resources Association* 21.3 (1985), pp. 365–380 (cit. on p. 28).
- [88] Matthew J Heaton, Abhirup Datta, Andrew O Finley, Reinhard Furrer, Joseph Guinness, Rajarshi Guhaniyogi, Florian Gerber, Robert B Gramacy, Dorit Hammerling, Matthias Katzfuss, et al. "A case study competition among methods for analyzing large spatial data". In: *Journal of Agricultural, Biological and Environmental Statistics* 24.3 (2019), pp. 398–425 (cit. on pp. 28, 30).
- [89] Zhe Jiang. "A survey on spatial prediction methods". In: *IEEE Transactions on Knowledge and Data Engineering* 31.9 (2018), pp. 1645–1664 (cit. on pp. 28, 30).
- [90] José-María Montero, Gema Fernández-Avilés, and Jorge Mateu. *Spatial and spatio-temporal geostatistical modeling and Kriging*. John Wiley & Sons, 2015 (cit. on p. 28).
- [91] Noel Cressie. *Statistics for spatial data*. John Wiley & Sons, 2015 (cit. on pp. 28, 30).
- [92] Luc Anselin. "Spatial econometrics: methods and models (Vol. 4)". In: *Studies in Operational Regional Science*. Dordrecht: Springer Netherlands (1988) (cit. on pp. 28, 31).
- [93] RP Haining. "The moving average model for spatial interaction". In: *Transactions of the Institute of British Geographers* (1978), pp. 202–225 (cit. on pp. 28, 31, 42).

- [94] Chao Dong, Chen Change Loy, Kaiming He, and Xiaoou Tang. “Image super-resolution using deep convolutional networks”. In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* 38.2 (2015), pp. 295–307 (cit. on pp. 28, 32, 42).
- [95] Wenzhe Shi, Jose Caballero, Ferenc Huszár, Johannes Totz, Andrew P Aitken, Rob Bishop, Daniel Rueckert, and Zehan Wang. “Real-time single image and video super-resolution using an efficient sub-pixel convolutional neural network”. In: *IEEE Conference on Computer Vision and Pattern Recognition*. 2016, pp. 1874–1883 (cit. on pp. 28, 32, 42).
- [96] Richard Bellman. “A Markovian decision process”. In: *Journal of Mathematics and Mechanics* (1957), pp. 679–684 (cit. on pp. 29, 33–34).
- [97] Daniel G Krige. “A statistical approach to some basic mine valuation problems on the Witwatersrand”. In: *Journal of the Southern African Institute of Mining and Metallurgy* 52.6 (1951), pp. 119–139 (cit. on p. 30).
- [98] Oliver Schabenberger and Carol A Gotway. *Statistical methods for spatial data analysis*. CRC press, 2017 (cit. on p. 30).
- [99] Mohamed A Bouhlel and Joaquim RRA Martins. “Gradient-enhanced Kriging for high-dimensional problems”. In: *Engineering with Computers* 35.1 (2019), pp. 157–173 (cit. on p. 30).
- [100] Koya Sato, Kei Inage, and Takeo Fujii. “On the performance of neural network residual Kriging in radio environment mapping”. In: *IEEE Access* 7 (2019), pp. 94557–94568 (cit. on p. 30).
- [101] Robert B Gramacy and Daniel W Apley. “Local Gaussian process approximation for large computer experiments”. In: *Journal of Computational and Graphical Statistics* 24.2 (2015), pp. 561–578 (cit. on pp. 30, 41, 56).
- [102] Håvard Rue, Andrea Riebler, Sigrunn H Sørbye, Janine B Illian, Daniel P Simpson, and Finn K Lindgren. “Bayesian computing with INLA: a review”. In: *Annual Review of Statistics and Its Application* 4 (2017), pp. 395–421 (cit. on p. 30).
- [103] Matthias Katzfuss. “A multi-resolution approximation for massive spatial datasets”. In: *Journal of the American Statistical Association* 112.517 (2017), pp. 201–214 (cit. on p. 30).
- [104] Florian Gerber, Rogier de Jong, Michael E Schaepman, Gabriela Schaepman-Strub, and Reinhard Furrer. “Predicting missing values in spatio-temporal remote sensing data”. In: *IEEE Transactions on Geoscience and Remote Sensing* 56.5 (2018), pp. 2841–2853 (cit. on pp. 30, 46).

- [105] Judea Pearl. *Reverend Bayes on inference engines: A distributed hierarchical approach*. Cognitive Systems Laboratory, School of Engineering and Applied Science, 1982 (cit. on p. 31).
- [106] Le Song, Arthur Gretton, Danny Bickson, Yucheng Low, and Carlos Guestrin. “Kernel Belief Propagation”. In: *International Conference on Artificial Intelligence and Statistics*. Ed. by Geoffrey Gordon, David Dunson, and Miroslav Dudík. Vol. 15. Proceedings of Machine Learning Research. Fort Lauderdale, FL, USA: PMLR, Apr. 2011, pp. 707–715. URL: <https://proceedings.mlr.press/v15/song11a.html> (cit. on p. 31).
- [107] Xin Zheng, Xiaobin Lin, and Pengfei Wu. “Outdoor image restoration based on belief propagation algorithm and formalized MTF”. In: *Journal of Physics: Conference Series*. Vol. 1651. 1. IOP Publishing. 2020, p. 012168 (cit. on p. 31).
- [108] Anat Levin, Assaf Zomet, and Yair Weiss. “Learning How to Inpaint from Global Image Statistics.” In: *ICCV*. Vol. 1. 2003, pp. 305–312 (cit. on p. 31).
- [109] Steffen L Lauritzen. *Graphical models*. Vol. 17. Clarendon Press, 1996 (cit. on p. 31).
- [110] Julian McAuley and Tibério Caetano. “Exploiting within-clique factorizations in junction-tree algorithms”. In: *Proceedings of the Thirteenth International Conference on Artificial Intelligence and Statistics*. JMLR Workshop and Conference Proceedings. 2010, pp. 525–532 (cit. on p. 31).
- [111] Lu Zheng, Ole Mengshoel, and Jike Chong. “Belief propagation by message passing in junction trees: Computing each message faster using GPU parallelization”. In: *arXiv preprint arXiv:1202.3777* (2012) (cit. on p. 31).
- [112] Victor Garcia Satorras and Max Welling. “Neural enhanced belief propagation on factor graphs”. In: *International Conference on Artificial Intelligence and Statistics*. PMLR. 2021, pp. 685–693 (cit. on p. 31).
- [113] Kevin Murphy, Yair Weiss, and Michael I Jordan. “Loopy belief propagation for approximate inference: An empirical study”. In: *arXiv preprint arXiv:1301.6725* (2013) (cit. on p. 31).
- [114] Kai Yang and Lung-fei Lee. “Identification and QML estimation of multivariate and simultaneous equations spatial autoregressive models”. In: *Journal of Econometrics* 196.1 (2017), pp. 196–214 (cit. on p. 31).
- [115] Miranda J Fix, Daniel S Cooley, and Emeric Thibaud. “Simultaneous autoregressive models for spatial extremes”. In: *Environmetrics* 32.2 (2021), e2656 (cit. on p. 31).
- [116] James Durbin. “Efficient estimation of parameters in moving-average models”. In: *Biometrika* 46.3/4 (1959), pp. 306–316 (cit. on p. 31).

- [117] Jianqing Qiu, Huimin Wang, Lin Hu, Changhong Yang, and Tao Zhang. “Spatial transmission network construction of influenza-like illness using dynamic Bayesian network and vector-autoregressive moving average model”. In: *BMC infectious diseases* 21.1 (2021), pp. 1–9 (cit. on p. 31).
- [118] Roberto Corizzo, Michelangelo Ceci, Hadi Fanaee-T, and Joao Gama. “Multi-aspect renewable energy forecasting”. In: *Information Sciences* 546 (2021), pp. 701–722 (cit. on pp. 31, 58).
- [119] Ali Soltani, Christopher James Pettit, Mohammad Heydari, and Fatemeh Aghaei. “Housing price variations using spatio-temporal data mining techniques”. In: *Journal of Housing and the Built Environment* (2021), pp. 1–29 (cit. on p. 31).
- [120] Junho Lee, Maria E Kamenetsky, Ronald E Gangnon, and Jun Zhu. “Clustered spatio-temporal varying coefficient regression model”. In: *Statistics in Medicine* 40.2 (2021), pp. 465–480 (cit. on p. 31).
- [121] Yara Abu Awad, Petros Koutrakis, Brent A Coull, and Joel Schwartz. “A spatio-temporal prediction model based on support vector machine regression: Ambient Black Carbon in three New England States”. In: *Environmental Research* 159 (2017), pp. 427–434 (cit. on p. 31).
- [122] Chao Wu, Mengjie Zhou, Pengyu Liu, and Mengjie Yang. “Analyzing COVID-19 using multisource data: An integrated approach of visualization, spatial regression, and machine learning”. In: *GeoHealth* 5.8 (2021), e2021GH000439 (cit. on p. 31).
- [123] Riku Hashimoto and Katsuya Suto. “SICNN: Spatial Interpolation with Convolutional Neural Networks for Radio Environment Mapping”. In: *2020 International Conference on Artificial Intelligence in Information and Communication (ICAIIIC)*. IEEE. 2020, pp. 167–170 (cit. on p. 32).
- [124] Yuankai Wu, Dingyi Zhuang, Aurelie Labbe, and Lijun Sun. “Inductive graph neural networks for spatiotemporal Kriging”. In: *arXiv preprint arXiv:2006.07527* (2020) (cit. on p. 32).
- [125] N Sato and Kishor S Trivedi. “Accurate and efficient stochastic reliability analysis of composite services using their compact Markov reward model representations”. In: *IEEE International Conference on Services Computing*. IEEE. 2007, pp. 114–121 (cit. on p. 33).
- [126] Francesco Bianchi and Francesco Lo Presti. “A Markov reward model based greedy heuristic for the virtual network embedding problem”. In: *International Symposium on Modeling, Analysis and Simulation of Computer and Telecommunication Systems*. IEEE. 2016, pp. 373–378 (cit. on p. 33).

- [127] Benjamin S. Murphy. *pykrige*. <https://pypi.org/project/PyKrige/>. 2020 (cit. on p. 40).
- [128] Matthias Feurer, Aaron Klein, Katharina Eggensperger, Jost Tobias Springenberg, Manuel Blum, and Frank Hutter. “Auto-sklearn: efficient and robust automated machine learning”. In: *Automated Machine Learning*. Springer, Cham, 2019, pp. 113–134 (cit. on pp. 41, 78).
- [129] Haifeng Jin, Qingquan Song, and Xia Hu. “Auto-keras: An efficient neural architecture search system”. In: *ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 2019, pp. 1946–1956 (cit. on p. 42).
- [130] World Bank DECRG. *Gross Domestic Product 2010*. <https://datacatalog.worldbank.org/search/dataset/0037850>. 2010 (cit. on p. 44).
- [131] DACON. *Corona Data Visualization AI Contest*. <https://www.dacon.io/competitions/official/235590/data/>. 2020 (cit. on p. 44).
- [132] OpenStreetMap. *OpenStreetMap*. <https://www.openstreetmap.org/>. 2019 (cit. on p. 44).
- [133] Holger H Hoos. “Programming by optimization”. In: *Communications of the ACM* 55.2 (2012), pp. 70–80 (cit. on p. 45).
- [134] Frank Hutter, Holger H Hoos, and Kevin Leyton-Brown. “Sequential model-based optimization for general algorithm configuration”. In: *International Conference on Learning and Intelligent Optimization*. Springer. 2011, pp. 507–523 (cit. on p. 45).
- [135] Frank Wilcoxon. “Individual comparisons by ranking methods”. In: *Breakthroughs in Statistics*. Springer, 1992, pp. 196–202 (cit. on p. 47).
- [136] Esam El-Araby, Tarek El-Ghazawi, Jacqueline Le Moigne, and Richard Irish. “Reconfigurable processing for satellite on-board automatic cloud cover assessment”. In: *Journal of Real-Time Image Processing* 4.3 (2009), pp. 245–259 (cit. on p. 60).
- [137] Gianluca Giuffrida, Lorenzo Diana, Francesco de Gioia, Gionata Benelli, Gabriele Meoni, Massimiliano Donati, and Luca Fanucci. “Cloudscout: a deep neural network for on-board cloud detection on hyperspectral images”. In: *Remote Sensing* 12.14 (2020), p. 2205 (cit. on p. 60).
- [138] Min Li, Soo Chin Liew, and Leong Keong Kwoh. “Producing cloud free and cloud-shadow free mosaic from cloudy IKONOS images”. In: *IEEE International Geoscience and Remote Sensing Symposium*. Vol. 6. Ieee. 2003, pp. 3946–3948 (cit. on pp. 60, 64, 78).

- [139] Eileen H Helmer and Bonnie Ruefenacht. “Cloud-free satellite image mosaics with regression trees and histogram matching”. In: *Photogrammetric Engineering & Remote Sensing* 71.9 (2005), pp. 1079–1089 (cit. on pp. 60, 64, 78).
- [140] Huanfeng Shen, Huifang Li, Yan Qian, Liangpei Zhang, and Qiangqiang Yuan. “An effective thin cloud removal procedure for visible remote sensing images”. In: *ISPRS Journal of Photogrammetry and Remote Sensing* 96 (2014), pp. 224–235 (cit. on p. 63).
- [141] Jun Liu, Xing Wang, Min Chen, Shuguang Liu, Xiran Zhou, Zhenfeng Shao, and Ping Liu. “Thin cloud removal from single satellite images”. In: *Optics Express* 22.1 (2014), pp. 618–632 (cit. on p. 63).
- [142] Gensheng Hu, Xiaoyi Li, and Dong Liang. “Thin cloud removal from remote sensing images using multidirectional dual tree complex wavelet transform and transfer least square support vector regression”. In: *Journal of Applied Remote Sensing* 9.1 (2015), p. 095053 (cit. on p. 63).
- [143] Meng Xu, Xiuping Jia, Mark Pickering, and Sen Jia. “Thin cloud removal from optical remote sensing images using the noise-adjusted principal components transform”. In: *ISPRS Journal of Photogrammetry and Remote Sensing* 149 (2019), pp. 215–225 (cit. on p. 63).
- [144] Wenbo Li, Ying Li, Di Chen, and Jonathan Cheung-Wai Chan. “Thin cloud removal with residual symmetrical concatenation network”. In: *ISPRS Journal of Photogrammetry and Remote Sensing* 153 (2019), pp. 137–150 (cit. on p. 63).
- [145] Jun Li, Zhaocong Wu, Zhongwen Hu, Jiaqi Zhang, Mingliang Li, Lu Mo, and Matthieu Molinier. “Thin cloud removal in optical remote sensing images based on generative adversarial networks and physical model of cloud distortion”. In: *ISPRS Journal of Photogrammetry and Remote Sensing* 166 (2020), pp. 373–389 (cit. on pp. 63, 76).
- [146] Jun Li, Zhaocong Wu, Zhongwen Hu, Zilong Li, Yisong Wang, and Matthieu Molinier. “Deep learning based thin cloud removal fusing vegetation red edge and short wave infrared spectral information for Sentinel-2A imagery”. In: *Remote Sensing* 13.1 (2021), p. 157 (cit. on pp. 63, 75).
- [147] Yujun Guo, Wei He, Yu Xia, and Hongyan Zhang. “Blind single-image-based thin cloud removal using a cloud perception integrated fast Fourier convolutional network”. In: *ISPRS Journal of Photogrammetry and Remote Sensing* 206 (2023), pp. 63–86 (cit. on p. 63).

- [148] Chuanrong Zhang, Weidong Li, and David Travis. “Gaps-fill of SLC-off Landsat ETM+ satellite image using a geostatistical approach”. In: *International Journal of Remote Sensing* 28.22 (2007), pp. 5103–5122 (cit. on p. 63).
- [149] USGS. *Phase 2 gap-fill algorithm: SLC-off gap-filled products gap-fill algorithm methodology*. <https://www.usgs.gov/faqs/what-landsat-7-etm-slc-data>. 2004 (cit. on p. 63).
- [150] Fang Xu, Yilei Shi, Patrick Ebel, Lei Yu, Gui-Song Xia, Wen Yang, and Xiao Xiang Zhu. “GLF-CR: SAR-enhanced cloud removal with global-local fusion”. In: *ISPRS Journal of Photogrammetry and Remote Sensing* 192 (2022), pp. 268–278 (cit. on p. 63).
- [151] Shuning Han, Jianmei Wang, and Shaoming Zhang. “Former-CR: A transformer-based thick cloud removal method with optical and SAR imagery”. In: *Remote Sensing* 15.5 (2023), p. 1196 (cit. on p. 63).
- [152] Hao Liu, Bo Huang, and Jiajun Cai. “Thick cloud removal under land cover changes using multisource satellite imagery and a spatiotemporal attention network”. In: *IEEE Transactions on Geoscience and Remote Sensing* 61 (2023), pp. 1–18 (cit. on p. 63).
- [153] Meng Xu, Furong Deng, Sen Jia, Xiuping Jia, and Antonio J Plaza. “Attention mechanism-based generative adversarial networks for cloud removal in Landsat images”. In: *Remote Sensing of Environment* 271 (2022), p. 112902 (cit. on p. 63).
- [154] Faramarz Naderi Darbaghshahi, Mohammad Reza Mohammadi, and Mohsen Soryani. “Cloud removal in remote sensing images using generative adversarial networks and SAR-to-optical image translation”. In: *IEEE Transactions on Geoscience and Remote Sensing* 60 (2021), pp. 1–9 (cit. on p. 63).
- [155] Ran Jing, Fuzhou Duan, Fengxian Lu, Miao Zhang, and Wenji Zhao. “Denosing diffusion probabilistic feature-based network for cloud removal in Sentinel-2 imagery”. In: *Remote Sensing* 15.9 (2023), p. 2217 (cit. on p. 63).
- [156] Alber Hamersson Sanchez, Michelle Cristina A Picoli, Gilberto Camara, Pedro R Andrade, Michel Eustaquio D Chaves, Sarah Lechler, Anderson R Soares, Rennan FB Marujo, Rolf Ezequiel O Simões, Karine R Ferreira, et al. “Comparison of Cloud cover detection algorithms on Sentinel-2 images of the amazon tropical forest”. In: *Remote Sensing* 12.8 (2020), p. 1284 (cit. on p. 64).
- [157] SentinelHub. *s2cloudless*. <https://github.com/sentinel-hub/sentinel2-cloud-detector>. 2018 (cit. on p. 64).

- [158] Fengli Zou, Qingwu Hu, Yichuan Liu, Haidong Li, Xujie Zhang, and Yuqi Liu. "Spatiotemporal Changes and Driving Analysis of Ecological Environmental Quality along the Qinghai-Tibet Railway Using Google Earth Engine—A Case Study Covering Xining to Jianghe Stations". In: *Remote Sensing* 16.6 (2024), p. 951 (cit. on p. 64).
- [159] John Brandt, Jessica Ertel, Justine Spore, and Fred Stolle. "Wall-to-wall mapping of tree extent in the tropics with Sentinel-1 and Sentinel-2". In: *Remote Sensing of Environment* 292 (2023), p. 113574 (cit. on p. 64).
- [160] Pasquale Scaramuzza and Julia Barsi. "Landsat 7 scan line corrector-off gap-filled product development". In: *Proceeding of Pecora*. Vol. 16. 3. 2005, pp. 23–27 (cit. on p. 64).
- [161] Hannes Feilhauer, Gregory P Asner, Roberta E Martin, and Sebastian Schmidtlein. "Brightness-normalized partial least squares regression for hyperspectral data". In: *Journal of Quantitative Spectroscopy and Radiative Transfer* 111.12–13 (2010), pp. 1947–1957 (cit. on p. 64).
- [162] Xingwang Fan, Yuanbo Liu, Jinmei Tao, and Yongling Weng. "Soil salinity retrieval from advanced multi-spectral sensor with partial least square regression". In: *Remote Sensing* 7.1 (2015), pp. 488–511 (cit. on p. 64).
- [163] Katherine Meacham-Hensold, Christopher M Montes, Jin Wu, Kaiyu Guan, Peng Fu, Elizabeth A Ainsworth, Taylor Pederson, Caitlin E Moore, Kenny Lee Brown, Christine Raines, et al. "High-throughput field phenotyping using hyperspectral reflectance and partial least squares regression (PLSR) reveals genetic modifications to photosynthetic capacity". In: *Remote Sensing of Environment* 231 (2019), pp. 111–176 (cit. on p. 64).
- [164] Raphael Fischer, Nico Piatkowski, Charlotte Pelletier, Geoffrey I Webb, François Petitjean, and Katharina Morik. "No cloud on the horizon: probabilistic gap filling in satellite image series". In: *International Conference on Data Science and Advanced Analytics*. IEEE. 2020, pp. 546–555 (cit. on p. 64).
- [165] Xiaolin Zhu, Feng Gao, Desheng Liu, and Jin Chen. "A modified neighborhood similar pixel interpolator approach for removing thick clouds in Landsat images". In: *IEEE Geoscience and Remote Sensing Letters* 9.3 (2011), pp. 521–525 (cit. on pp. 64, 79).
- [166] Chao Zeng, Huanfeng Shen, and Liangpei Zhang. "Recovering missing pixels for Landsat ETM+ SLC-off imagery using multi-temporal regression analysis and a regularization method". In: *Remote Sensing of Environment* 131 (2013), pp. 182–194 (cit. on p. 64).

- [167] Qing Cheng, Huanfeng Shen, Liangpei Zhang, Qiangqiang Yuan, and Chao Zeng. "Cloud removal for remotely sensed images by similar pixel replacement guided with a spatio-temporal MRF model". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 92 (2014), pp. 54–68 (cit. on p. 64).
- [168] Farid Melgani. "Contextual reconstruction of cloud-contaminated multi-temporal multispectral images". In: *IEEE Transactions on Geoscience and Remote Sensing* 44.2 (2006), pp. 442–455 (cit. on p. 64).
- [169] Bin Chen, Bo Huang, Lifan Chen, and Bing Xu. "Spatially and temporally weighted regression: A novel method to produce continuous cloud-free Landsat imagery". In: *IEEE Transactions on Geoscience and Remote Sensing* 55.1 (2016), pp. 27–37 (cit. on p. 64).
- [170] Zhe Zhu, Curtis E Woodcock, Christopher Holden, and Zhiqiang Yang. "Generating synthetic Landsat images based on all available Landsat data: Predicting Landsat surface reflectance at any given time". In: *Remote Sensing of Environment* 162 (2015), pp. 67–83 (cit. on p. 64).
- [171] Wen-Jie Zheng, Xi-Le Zhao, Yu-Bang Zheng, Jie Lin, Lina Zhuang, and Ting-Zhu Huang. "Spatial-spectral-temporal connective tensor network decomposition for thick cloud removal". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 199 (2023), pp. 182–194 (cit. on p. 64).
- [172] Qiang Zhang, Qiangqiang Yuan, Jie Li, Zhiwei Li, Huanfeng Shen, and Liangpei Zhang. "Thick cloud and cloud shadow removal in multitemporal imagery using progressively spatio-temporal patch group deep learning". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 162 (2020), pp. 148–160 (cit. on pp. 65, 178).
- [173] Qiang Zhang, Qiangqiang Yuan, Zhiwei Li, Fujun Sun, and Liangpei Zhang. "Combined deep prior with low-rank tensor SVD for thick cloud removal in multitemporal images". In: *ISPRS Journal of Photogrammetry and Remote Sensing* 177 (2021), pp. 161–173 (cit. on p. 65).
- [174] Xiaohu Zhao and Kebin Jia. "Cloud Removal in Remote Sensing Using Sequential-Based Diffusion Models". In: *Remote Sensing* 15.11 (2023), p. 2861 (cit. on pp. 65, 178).
- [175] Xuechao Zou, Kai Li, Junliang Xing, Yu Zhang, Shiyang Wang, Lei Jin, and Pin Tao. "DiffCR: A Fast Conditional Diffusion Framework for Cloud Removal From Optical Satellite Images". In: *IEEE Transactions on Geoscience and Remote Sensing* 62 (2024), pp. 1–14 (cit. on p. 65).

- [176] Corinne Stucker, Vivien Sainte Fare Garnot, and Konrad Schindler. “U-TILISE: A Sequence-to-sequence Model for Cloud Removal in Optical Satellite Time Series”. In: *IEEE Transactions on Geoscience and Remote Sensing* 61 (2023) (cit. on pp. 65, 77).
- [177] Michael Schmitt, Lloyd Haydn Hughes, Chunping Qiu, and Xiao Xiang Zhu. “SEN12MS—A Curated Dataset of Georeferenced Multi-Spectral Sentinel-1/2 Imagery for Deep Learning and Data Fusion”. In: *arXiv preprint arXiv:1906.07789* (2019) (cit. on p. 75).
- [178] M. Buchhorn, B. Smets, L. Bertels, M. Lesiv, N.-E. Tsendbazar, D. Masiliunas, L. Linlin, M. Herold, and S. Fritz. *Copernicus Global Land Service: Land Cover 100m: Collection 3: epoch 2019: Globe (Version V3.0.1)*. Zenodo. DOI: 10.5281/zenodo.3939050. 2020 (cit. on p. 76).
- [179] Patrick Ebel, Yajin Xu, Michael Schmitt, and Xiao Xiang Zhu. “SEN12MS-CR-TS: A Remote Sensing Data Set for Multi-modal Multi-temporal Cloud Removal”. In: *IEEE Transactions on Geoscience and Remote Sensing* (2022) (cit. on pp. 76–77, 89).
- [180] Vishnu Sarukkai, Anirudh Jain, Burak Uz Kent, and Stefano Ermon. “Cloud removal from satellite images using spatiotemporal generator networks”. In: *IEEE/CVF Winter Conference on Applications of Computer Vision*. 2020, pp. 1796–1805 (cit. on p. 77).
- [181] Vivien Sainte Fare Garnot and Loic Landrieu. “Panoptic segmentation of satellite image time series with convolutional temporal attention networks”. In: *IEEE/CVF International Conference on Computer Vision*. 2021, pp. 4872–4881 (cit. on p. 77).
- [182] Google. *Google Earth Engine*. <https://earthengine.google.com/>. 2022 (cit. on p. 78).
- [183] Jonas Mockus. *Bayesian approach to global optimization: theory and applications*. Vol. 37. Springer Science & Business Media, 2012 (cit. on p. 78).
- [184] Mikolaj Czerkawski, Robert Atkinson, Craig Michie, and Christos Tachtatzis. “SatelliteCloudGenerator: Controllable Cloud and Shadow Synthesis for Multi-Spectral Optical Satellite Images”. In: *Remote Sensing* 15.17 (2023). ISSN: 2072-4292. DOI: 10.3390/rs15174138. URL: <https://www.mdpi.com/2072-4292/15/17/4138> (cit. on pp. 80, 90).
- [185] Zhou Wang, A.C. Bovik, H.R. Sheikh, and E.P. Simoncelli. “Image quality assessment: from error visibility to structural similarity”. In: *IEEE Transactions on Image Processing* 13.4 (1989), pp. 600–612 (cit. on p. 83).

- [186] Laurens Arp, Mitra Baratchi, and Holger H. Hoos. “VPint: value propagation-based spatial interpolation”. In: *Data Mining and Knowledge Discovery* 36 (2022), pp. 1647–1678 (cit. on p. 93).
- [187] Luke A Brown, Courtney Meier, Harry Morris, Julio Pastor-Guzman, Gabriele Bai, Christophe Lerebourg, Nadine Gobron, Christian Lanconelli, Marco Clerici, and Jadunandan Dash. “Evaluation of global leaf area index and fraction of absorbed photosynthetically active radiation products over North America using Copernicus Ground Based Observations for Validation data”. In: *Remote Sensing of Environment* 247 (2020), p. 111935 (cit. on p. 98).
- [188] National Ecological Observatory Network (NEON). *NEON*. URL: <https://data.neonscience.org> (cit. on p. 98).
- [189] C Bacour, F Baret, D Béal, M Weiss, and K Pavageau. “Neural network estimation of LAI, fAPAR, fCover and LAI× Cab, from top of canopy MERIS reflectance data: Principles and validation”. In: *Remote Sensing of Environment* 105.4 (2006), pp. 313–325 (cit. on p. 98).
- [190] Stéphane Jacquemoud, Frédéric Baret, Bruno Andrieu, FM Danson, and K Jaggard. “Extraction of vegetation biophysical parameters by inversion of the PROSPECT+ SAIL models on sugar beet canopy reflectance data. Application to TM and AVIRIS sensors”. In: *Remote Sensing of Environment* 52.3 (1995), pp. 163–172 (cit. on pp. 98–99, 156).
- [191] Stéphane Jacquemoud, Wout Verhoef, Frédéric Baret, Cédric Bacour, Pablo J Zarco-Tejada, Gregory P Asner, Christophe François, and Susan L Ustin. “PROSPECT+ SAIL models: A review of use for vegetation characterization”. In: *Remote Sensing of Environment* 113 (2009), S56–S66 (cit. on pp. 98, 183).
- [192] Gabriele Bai, Jadunandan Dash, Luke Brown, Courtney Meier, C Lerebourg, E Ronco, N Lamquin, V Bruniquel, M Clerici, and N Gobron. “GBOV (ground-based observation for validation): a Copernicus service for validation of vegetation land products”. In: *IEEE International Geoscience and Remote Sensing Symposium*. IEEE. 2019, pp. 4592–4594 (cit. on p. 99).
- [193] NASA. *SMAPVEX08 In Situ Vegetation Data*. 2008. DOI: [10.5067/US4X5QPYH6DB](https://doi.org/10.5067/US4X5QPYH6DB). URL: https://cmr.earthdata.nasa.gov/search/concepts/C1000001420-NSIDC_ECS.html (cit. on p. 99).
- [194] Liangyun, Liu and Bowen, Song. *VallAI_Crop: Validation dataset for coarse-resolution satellite LAI product over Chinese cropland*. 2021. DOI: [10.5281/zenodo.4080910](https://doi.org/10.5281/zenodo.4080910). URL: https://data.niaid.nih.gov/resources?id=zenodo_4080910 (cit. on p. 99).

- [195] Jingwen Wang, Raul Lopez-Lozano, Marie Weiss, Samuel Buis, Wenjuan Li, Shouyang Liu, Frédéric Baret, and Jiahua Zhang. “Crop specific inversion of PROSAIL to retrieve green area index (GAI) from several decametric satellites using a Bayesian framework”. In: *Remote Sensing of Environment* 278 (2022), p. 113085 (cit. on pp. 99, 131).
- [196] M. Meroni, R. Colombo, and C. Panigada. “Inversion of a radiative transfer model with hyperspectral observations for LAI mapping in poplar plantations”. In: *Remote Sensing of Environment* 92.2 (2004), pp. 195–206. ISSN: 0034-4257 (cit. on p. 99).
- [197] Cédric Bacour, Stéphane Jacquemoud, Marc Leroy, Olivier Hauteœur, Marie Weiss, Laurent Prévot, Nadine Bruguier, and Habiba Chauki. “Reliability of the estimation of vegetation characteristics by inversion of three canopy reflectance models on airborne POLDER data”. In: *Agronomie* 22.6 (2002), pp. 555–565 (cit. on p. 99).
- [198] Anting Guo, Wenjiang Huang, Binxiang Qian, Huichun Ye, Qunjun Jiao, Xiangzhe Cheng, and Chao Ruan. “A hybrid model coupling PROSAIL and continuous wavelet transform based on multi-angle hyperspectral data improves maize chlorophyll retrieval”. In: *International Journal of Applied Earth Observation and Geoinformation* 132 (2024), p. 104076 (cit. on p. 99).
- [199] Frank Hutter, Holger Hoos, and Kevin Leyton-Brown. “An efficient approach for assessing hyperparameter importance”. In: *International Conference on Machine Learning*. PMLR. 2014, pp. 754–762 (cit. on pp. 102–103).
- [200] Ilya M Sobol. “Global sensitivity indices for nonlinear mathematical models and their Monte Carlo estimates”. In: *Mathematics and computers in simulation* 55.1-3 (2001), pp. 271–280 (cit. on pp. 102–103).
- [201] Thomas Bäck. *Evolutionary computation 1: Basic algorithms and operators*. CRC press, 2018 (cit. on p. 105).
- [202] Amrita Chakraborty and Arpan Kumar Kar. “Swarm intelligence: A review of algorithms”. In: *Nature-inspired Computing and Optimization: Theory and Applications* (2017), pp. 475–494 (cit. on p. 105).
- [203] Roshanak Darvishzadeh, Andrew Skidmore, Martin Schlerf, and Clement Atzberger. “Inversion of a radiative transfer model for estimating vegetation LAI and chlorophyll in a heterogeneous grassland”. In: *Remote Sensing of Environment*. Earth Observations for Terrestrial Biodiversity and Ecosystems Special Issue 112.5 (May 2008), pp. 2592–2604. ISSN: 0034-4257. DOI: 10.1016/j.rse.2007.12.003. URL: <https://www.sciencedirect.com/science/article/pii/S0034425707004968> (cit. on p. 108).

- [204] Jochem Verrelst, Juan Pablo Rivera, Ganna Leonenko, Luis Alonso, and José Moreno. “Optimizing LUT-Based RTM Inversion for Semiautomatic Mapping of Crop Biophysical Parameters from Sentinel-2 and -3 Data: Role of Cost Functions”. In: *IEEE Transactions on Geoscience and Remote Sensing* 52.1 (Jan. 2014), pp. 257–269. ISSN: 1558-0644. DOI: [10.1109/TGRS.2013.2238242](https://doi.org/10.1109/TGRS.2013.2238242) (cit. on p. 108).
- [205] M Varah James. “On the numerical solution of ill-conditioned linear systems with applications to ill-posed problems”. In: *SIAM Journal on Numerical Analysis* 10.2 (1973), pp. 257–267 (cit. on pp. 109, 126, 134).
- [206] David A Belsley and RW Oldford. “The general problem of ill conditioning and its role in statistical analysis”. In: *Computational Statistics & Data Analysis* 4.2 (1986), pp. 103–120 (cit. on pp. 109, 126, 134).
- [207] Fei Xu and Ben Somers. “Unmixing-based Sentinel-2 downscaling for urban land cover mapping”. In: *ISPRS Journal of Photogrammetry and Remote Sensing* 171 (2021), pp. 133–154 (cit. on p. 110).
- [208] Katja Kowalski, Akpona Okujeni, and Patrick Hostert. “A generalized framework for drought monitoring across central European grassland gradients with Sentinel-2 time series”. In: *Remote Sensing of Environment* 286 (2023), p. 113449 (cit. on p. 110).
- [209] Ion Sola, Alberto García-Martín, Leire Sandonís-Pozo, Jesús Álvarez-Mozos, Fernando Pérez-Cabello, María González-Audícana, and Raquel Montorio Llovería. “Assessment of atmospheric correction methods for Sentinel-2 images in Mediterranean landscapes”. In: *International journal of applied earth observation and geoinformation* 73 (2018), pp. 63–76 (cit. on pp. 115–116).
- [210] Jochem Verrelst, Jorge Vicent, Juan Pablo Rivera-Caicedo, Maria Lumbierres, Pablo Morcillo-Pallarés, and José Moreno. “Global sensitivity analysis of leaf-canopy-atmosphere RTMs: Implications for biophysical variables retrieval from top-of-atmosphere radiance data”. In: *Remote sensing* 11.16 (2019), p. 1923 (cit. on p. 115).
- [211] Pascal Vincent, Hugo Larochelle, Yoshua Bengio, and Pierre-Antoine Manzagol. “Extracting and composing robust features with denoising autoencoders”. In: *Proceedings of the 25th International Conference on Machine Learning*. 2008, pp. 1096–1103 (cit. on pp. 122, 179).
- [212] Grzegorz Łukaszewicz and Piotr Kalita. “Navier–Stokes equations”. In: *Advances in Mechanics and Mathematics* 34 (2016) (cit. on p. 126).

- [213] Charles R Doering and John D Gibbon. *Applied analysis of the Navier-Stokes equations*. 12. Cambridge University Press, 1995 (cit. on p. 126).
- [214] Magdalena Main-Knorn, Bringfried Pflug, Jerome Louis, Vincent Debaecker, Uwe Müller-Wilm, and Ferran Gascon. “Sen2Cor for Sentinel-2”. In: *Image and Signal Processing for Remote Sensing*. Vol. 23. SPIE. 2017, pp. 37–48 (cit. on p. 126).
- [215] Vitor Souza Martins, Claudio Clemente Faria Barbosa, Lino Augusto Sander De Carvalho, Daniel Schaffer Ferreira Jorge, Felipe de Lucia Lobo, and Evelyn Márcia Leão de Moraes Novo. “Assessment of atmospheric correction methods for Sentinel-2 MSI images applied to Amazon floodplain lakes”. In: *Remote Sensing* 9.4 (2017), p. 322 (cit. on p. 126).
- [216] Kyle Cranmer, Johann Brehmer, and Gilles Louppe. “The frontier of simulation-based inference”. In: *Proceedings of the National Academy of Sciences* 117.48 (2020), pp. 30055–30062 (cit. on pp. 126–127, 129, 136).
- [217] Lorenzo Pacchiardi and Ritabrata Dutta. “Score matched neural exponential families for likelihood-free inference”. In: *Journal of Machine Learning Research* 23.38 (2022), pp. 1–71 (cit. on pp. 126, 129).
- [218] Michael U Gutmann, Jukka Cor, et al. “Bayesian optimization for likelihood-free inference of simulator-based statistical models”. In: *Journal of Machine Learning Research* 17.125 (2016), pp. 1–47 (cit. on pp. 126, 129).
- [219] Jan-Matthis Lueckmann, Jan Boelts, David Greenberg, Pedro Goncalves, and Jakob Macke. “Benchmarking simulation-based inference”. In: *International Conference on Artificial Intelligence and Statistics*. PMLR. 2021, pp. 343–351 (cit. on pp. 126, 157).
- [220] Yuji Kim and Nori Nakata. “Geophysical inversion versus machine learning in inverse problems”. In: *The Leading Edge* 37.12 (2018), pp. 894–901 (cit. on p. 126).
- [221] Gregory Ongie, Ajil Jalal, Christopher A Metzler, Richard G Baraniuk, Alexandros G Dimakis, and Rebecca Willett. “Deep learning techniques for inverse problems in imaging”. In: *IEEE Journal on Selected Areas in Information Theory* 1.1 (2020), pp. 39–56 (cit. on p. 126).
- [222] Anil Aswani, Zuo-Jun Shen, and Auyon Siddiq. “Inverse optimization with noisy data”. In: *Operations Research* 66.3 (2018), pp. 870–892 (cit. on p. 126).
- [223] Pingheng Li and Quan Wang. “Retrieval of leaf biochemical parameters using PROSPECT inversion: A new approach for alleviating ill-posed problems”. In: *IEEE Transactions on Geoscience and Remote Sensing* 49.7 (2011), pp. 2499–2506 (cit. on p. 126).

- [224] Joel L Horowitz. “Ill-posed inverse problems in economics”. In: *Annual Review of Economics* 6.1 (2014), pp. 21–51 (cit. on p. 126).
- [225] David A Cicci. “Improving gravity field determination in ill-conditioned inverse problems”. In: *Computers & Geosciences* 18.5 (1992), pp. 509–516 (cit. on p. 126).
- [226] Jayanta Mandi, Peter J Stuckey, Tias Guns, et al. “Smart predict-and-optimize for hard combinatorial optimization problems”. In: *Proceedings of the AAAI conference on artificial intelligence*. Vol. 34. 02. 2020, pp. 1603–1610 (cit. on pp. 126, 129, 133).
- [227] Carla E Brodley and Mark A Friedl. “Identifying mislabeled training data”. In: *Journal of Artificial Intelligence Research* 11 (1999), pp. 131–167 (cit. on p. 128).
- [228] Nagarajan Natarajan, Inderjit S Dhillon, Pradeep K Ravikumar, and Ambuj Tewari. “Learning with noisy labels”. In: *Advances in neural information processing systems* 26 (2013) (cit. on p. 128).
- [229] Hwanjun Song, Minseok Kim, Dongmin Park, Yooju Shin, and Jae-Gil Lee. “Learning from noisy labels with deep neural networks: A survey”. In: *IEEE transactions on neural networks and learning systems* 34.11 (2022), pp. 8135–8153 (cit. on p. 128).
- [230] Curtis Northcutt, Lu Jiang, and Isaac Chuang. “Confident learning: Estimating uncertainty in dataset labels”. In: *Journal of Artificial Intelligence Research* 70 (2021), pp. 1373–1411 (cit. on p. 128).
- [231] Alexandra N Uma, Tommaso Fornaciari, Dirk Hovy, Silviu Paun, Barbara Plank, and Massimo Poesio. “Learning from disagreement: A survey”. In: *Journal of Artificial Intelligence Research* 72 (2021), pp. 1385–1470 (cit. on p. 128).
- [232] Alexander Philip Dawid and Allan M Skene. “Maximum likelihood estimation of observer error-rates using the EM algorithm”. In: *Journal of the Royal Statistical Society: Series C (Applied Statistics)* 28.1 (1979), pp. 20–28 (cit. on p. 128).
- [233] Silviu Paun, Bob Carpenter, Jon Chamberlain, Dirk Hovy, Udo Kruschwitz, and Massimo Poesio. “Comparing Bayesian models of annotation”. In: *Transactions of the Association for Computational Linguistics* 6 (2018), pp. 571–585 (cit. on p. 128).
- [234] Lora Aroyo and Chris Welty. “Truth is a lie: Crowd truth and the seven myths of human annotation”. In: *AI Magazine* 36.1 (2015), pp. 15–24 (cit. on p. 128).

- [235] Mélanie Bernhardt, Daniel C Castro, Ryutaro Tanno, Anton Schwaighofer, Kerem C Tezcan, Miguel Monteiro, Shruthi Bannur, Matthew P Lungren, Aditya Nori, Ben Glocker, et al. “Active label cleaning for improved dataset quality under resource constraints”. In: *Nature communications* 13.1 (2022), p. 1161 (cit. on p. 128).
- [236] Lu Jiang, Di Huang, Mason Liu, and Weilong Yang. “Beyond synthetic noise: Deep learning on controlled noisy labels”. In: *International conference on machine learning*. PMLR. 2020, pp. 4804–4815 (cit. on p. 128).
- [237] Yingsong Huang, Bing Bai, Shengwei Zhao, Kun Bai, and Fei Wang. “Uncertainty-aware learning against label noise on imbalanced datasets”. In: *Proceedings of the AAAI conference on artificial intelligence*. Vol. 36. 6. 2022, pp. 6960–6969 (cit. on p. 128).
- [238] Jang-Hyun Kim, Sangdoo Yun, and Hyun Oh Song. “Neural relation graph: A unified framework for identifying label noise and outlier data”. In: *Advances in Neural Information Processing Systems* 36 (2023), pp. 43754–43779 (cit. on p. 128).
- [239] Kush Bhatia, Prateek Jain, Parameswaran Kamalaruban, and Purushottam Kar. “Consistent robust regression”. In: *Advances in Neural Information Processing Systems* 30 (2017) (cit. on p. 129).
- [240] Dong Huang, Ricardo Cabral, and Fernando De la Torre. “Robust regression”. In: *IEEE transactions on pattern analysis and machine intelligence* 38.2 (2015), pp. 363–375 (cit. on p. 129).
- [241] Ruidi Chen and Ioannis Ch Paschalidis. “A robust learning approach for regression models based on distributionally robust optimization”. In: *Journal of Machine Learning Research* 19.13 (2018), pp. 1–48 (cit. on p. 129).
- [242] Toon Vanderschueren, Tim Verdonck, Bart Baesens, and Wouter Verbeke. “Predict-then-optimize or predict-and-optimize? An empirical evaluation of cost-sensitive learning strategies”. In: *Information sciences* 594 (2022), pp. 400–415 (cit. on p. 129).
- [243] Georgiana Ifrim, Barry O’Sullivan, and Helmut Simonis. “Properties of energy-price forecasts for scheduling”. In: *International Conference on Principles and Practice of Constraint Programming*. Springer. 2012, pp. 957–972 (cit. on p. 129).
- [244] Adam N Elmachetoub and Paul Grigas. “Smart “predict, then optimize””. In: *Management Science* 68.1 (2022), pp. 9–26 (cit. on p. 129).

- [245] Jarno Lintusaari, Henri Vuollekoski, Antti Kangasrääsiö, Kusti Skytén, Marko Järvenpää, Pekka Marttinen, Michael U Gutmann, Aki Vehtari, Jukka Corander, and Samuel Kaski. “Elfi: Engine for likelihood-free inference”. In: *Journal of Machine Learning Research* 19.16 (2018), pp. 1–7 (cit. on p. 129).
- [246] Duncan Watson-Parris, Andrew Williams, Lucia Deaconu, and Philip Stier. “Model calibration using ESEm v1. 1.0—an open, scalable Earth system emulator”. In: *Geoscientific Model Development* 14.12 (2021), pp. 7659–7672 (cit. on p. 129).
- [247] Maximilian Dax, Stephen R Green, Jonathan Gair, Jakob H Macke, Alessandra Buonanno, and Bernhard Schölkopf. “Real-time gravitational wave science with neural posterior estimation”. In: *Physical Review Letters* 127.24 (2021), p. 241103 (cit. on p. 129).
- [248] David B Bernstein, Snorre Sulheim, Eivind Almaas, and Daniel Segrè. “Addressing uncertainty in genome-scale metabolic model reconstruction and analysis”. In: *Genome Biology* 22 (2021), pp. 1–22 (cit. on p. 129).
- [249] Scott A Sisson, Yanan Fan, and Mark Beaumont. *Handbook of approximate Bayesian computation*. CRC press, 2018 (cit. on pp. 129, 136).
- [250] Paul Marjoram, John Molitor, Vincent Plagnol, and Simon Tavaré. “Markov chain Monte Carlo without likelihoods”. In: *Proceedings of the National Academy of Sciences* 100.26 (2003), pp. 15324–15328 (cit. on p. 130).
- [251] Scott A Sisson, Yanan Fan, and Mark M Tanaka. “Sequential Monte Carlo without likelihoods”. In: *Proceedings of the National Academy of Sciences* 104.6 (2007), pp. 1760–1765 (cit. on pp. 130, 157).
- [252] Manuel Glöckler, Michael Deistler, and Jakob H Macke. “Variational methods for simulation-based inference”. In: *International Conference on Learning Representations*. 2022 (cit. on p. 130).
- [253] David M Blei, Alp Kucukelbir, and Jon D McAuliffe. “Variational inference: A review for statisticians”. In: *Journal of the American statistical Association* 112.518 (2017), pp. 859–877 (cit. on p. 130).
- [254] Ankush Ganguly, Sanjana Jain, and Ukrit Watchareeruetai. “Amortized variational inference: A systematic review”. In: *Journal of Artificial Intelligence Research* 78 (2023), pp. 167–215 (cit. on p. 130).

- [255] Laura von Rueden, Sebastian Mayer, Rafet Sifa, Christian Bauckhage, and Jochen Garcke. “Combining machine learning and simulation to a hybrid modelling approach: Current and future directions”. In: *Advances in Intelligent Data Analysis XVIII: 18th International Symposium on Intelligent Data Analysis, IDA 2020, Konstanz, Germany, April 27–29, 2020, Proceedings 18*. Springer. 2020, pp. 548–560 (cit. on p. 130).
- [256] Andrew Zammit-Mangion, Matthew Sainsbury-Dale, and Raphaël Huser. “Neural methods for amortized inference”. In: *Annual Review of Statistics and Its Application* 12 (2024) (cit. on p. 130).
- [257] Tom Rainforth, Adam Golinski, Frank Wood, and Sheheryar Zaidi. “Target-aware Bayesian inference: how to beat optimal conventional estimators”. In: *Journal of Machine Learning Research* 21.88 (2020), pp. 1–54 (cit. on p. 130).
- [258] Manuel Gloeckler, Michael Deistler, and Jakob H Macke. “Adversarial robustness of amortized Bayesian inference”. In: *International Conference on Machine Learning*. PMLR. 2023, pp. 11493–11524 (cit. on p. 130).
- [259] Manuel Gloeckler, Michael Deistler, Christian Weillbach, Frank Wood, and Jakob H Macke. “All-in-one simulation-based inference”. In: *Proceedings of the 41st International Conference on Machine Learning* (2024) (cit. on p. 130).
- [260] Jonas Wildberger, Maximilian Dax, Simon Buchholz, Stephen Green, Jakob H Macke, and Bernhard Schölkopf. “Flow matching for scalable simulation-based inference”. In: *Advances in Neural Information Processing Systems* 36 (2024) (cit. on p. 130).
- [261] Joeri Hermans, Arnaud Delaunoy, François Rozet, Antoine Wehenkel, and Gilles Louppe. “A crisis in simulation-based inference? Beware, your posterior approximations can be unfaithful”. In: *Transactions on Machine Learning Research* (2022) (cit. on p. 130).
- [262] Rahul Rahaman et al. “Uncertainty quantification and deep ensembles”. In: *Advances in Neural Information Processing Systems* 34 (2021), pp. 20063–20075 (cit. on pp. 131, 160).
- [263] Florian Wenzel, Jasper Snoek, Dustin Tran, and Rodolphe Jenatton. “Hyperparameter ensembles for robustness and uncertainty quantification”. In: *Advances in Neural Information Processing Systems* 33 (2020), pp. 6514–6527 (cit. on pp. 131, 160).

- [264] J Padarian, B Minasny, and Alex B McBratney. “Assessing the uncertainty of deep learning soil spectral models using Monte Carlo dropout”. In: *Geoderma* 425 (2022), p. 116063 (cit. on p. 131).
- [265] Daily Milanés-Hermosilla, Rafael Trujillo Codorniú, René López-Baracaldo, Roberto Sagaró-Zamora, Denis Delisle-Rodriguez, John Jairo Villarejo-Mayor, and José Ricardo Núñez-Álvarez. “Monte Carlo dropout for uncertainty estimation and motor imagery classification”. In: *Sensors* 21.21 (2021), p. 7241 (cit. on p. 131).
- [266] Yongchan Kwon, Joong-Ho Won, Beom Joon Kim, and Myunghee Cho Paik. “Uncertainty quantification using Bayesian neural networks in classification: Application to biomedical image segmentation”. In: *Computational Statistics & Data Analysis* 142 (2020), p. 106816 (cit. on p. 131).
- [267] Audrey Olivier, Michael D Shields, and Lori Graham-Brady. “Bayesian neural networks for uncertainty quantification in data-driven materials modeling”. In: *Computer Methods in Applied Mechanics and Engineering* 386 (2021), p. 114079 (cit. on p. 131).
- [268] Moloud Abdar, Farhad Pourpanah, Sadiq Hussain, Dana Rezazadegan, Li Liu, Mohammad Ghavamzadeh, Paul Fieguth, Xiaochun Cao, Abbas Khosravi, U Rajendra Acharya, et al. “A review of uncertainty quantification in deep learning: Techniques, applications and challenges”. In: *Information Fusion* 76 (2021), pp. 243–297 (cit. on p. 131).
- [269] Jakob Gawlikowski, Cedrique Rovile Njietcheu Tassi, Mohsin Ali, Jongseok Lee, Matthias Humt, Jianxiang Feng, Anna Kruspe, Rudolph Triebel, Peter Jung, Ribana Roscher, et al. “A survey of uncertainty in deep neural networks”. In: *Artificial Intelligence Review* 56.Suppl 1 (2023), pp. 1513–1589 (cit. on p. 131).
- [270] Apostolos F Psaros, Xuhui Meng, Zongren Zou, Ling Guo, and George Em Karniadakis. “Uncertainty quantification in scientific machine learning: Methods, metrics, and comparisons”. In: *Journal of Computational Physics* 477 (2023), p. 111902 (cit. on p. 131).
- [271] Yinhao Zhu, Nicholas Zabaras, Phaeton-Stelios Koutsourelakis, and Paris Perdikaris. “Physics-constrained deep learning for high-dimensional surrogate modeling and uncertainty quantification without labeled data”. In: *Journal of Computational Physics* 394 (2019), pp. 56–81 (cit. on p. 131).
- [272] Andrea Beck, Jakob Dürrwächter, Thomas Kuhn, Fabian Meyer, Claus-Dieter Munz, and Christian Rohde. “hp-Multilevel Monte Carlo Methods for Uncertainty Quantification of Compressible Navier–Stokes Equations”. In: *SIAM Journal on Scientific Computing* 42.4 (2020), B1067–B1091 (cit. on p. 131).

- [273] Laura Martínez-Ferrer, Álvaro Moreno-Martínez, Manuel Campos-Taberner, Francisco Javier García-Haro, Jordi Muñoz-Marí, Steven W Running, John Kimball, Nicholas Clinton, and Gustau Camps-Valls. “Quantifying uncertainty in high resolution biophysical variable retrieval with machine learning”. In: *Remote Sensing of Environment* 280 (2022), p. 113199 (cit. on p. 131).
- [274] Matthias König, Annelot W Bosman, Holger H Hoos, and Jan N van Rijn. “Critically Assessing the State of the Art in Neural Network Verification”. In: *Journal of Machine Learning Research* 25.12 (2024), pp. 1–53 (cit. on p. 136).
- [275] Ian J Goodfellow, Jonathon Shlens, and Christian Szegedy. “Explaining and harnessing adversarial examples”. In: *arXiv preprint arXiv:1412.6572* (2014) (cit. on p. 136).
- [276] Linyi Li, Tao Xie, and Bo Li. “Sok: Certified robustness for deep neural networks”. In: *2023 IEEE Symposium on Security and Privacy*. IEEE. 2023, pp. 1289–1310 (cit. on p. 136).
- [277] Jing Zhao, JJing Li, Qinhuo Liu, and Le Yang. “A preliminary study on mechanism of LAI inversion saturation”. In: *The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences* 39 (2012), pp. 77–81 (cit. on p. 140).
- [278] Nikolaus Hansen and Andreas Ostermeier. “Adapting arbitrary normal mutation distributions in evolution strategies: The covariance matrix adaptation”. In: *Proceedings of IEEE international conference on evolutionary computation*. IEEE. 1996, pp. 312–317 (cit. on p. 144).
- [279] Jacob de Nobel, Diederick Vermetten, Hao Wang, Carola Doerr, and Thomas Bäck. “Tuning as a means of assessing the benefits of new ideas in interplay with existing algorithmic modules”. In: *Proceedings of the Genetic and Evolutionary Computation Conference Companion*. 2021, pp. 1375–1384 (cit. on p. 144).
- [280] Justin K Pugh, Lisa B Soros, and Kenneth O Stanley. “Quality diversity: A new frontier for evolutionary computation”. In: *Frontiers in Robotics and AI* (2016), p. 40 (cit. on p. 147).
- [281] Johannes Jahn. *Scalarization in multi objective optimization*. Springer, 1985 (cit. on p. 150).
- [282] Ruihao Zheng and Zhenkun Wang. “A generalized scalarization method for evolutionary multi-objective optimization”. In: *Proceedings of the AAAI Conference on Artificial Intelligence*. Vol. 37. 10. 2023, pp. 12518–12525 (cit. on p. 150).

- [283] Der-Tsai Lee and Bruce J Schachter. “Two algorithms for constructing a De-launay triangulation”. In: *International Journal of Computer & Information Sciences* 9.3 (1980), pp. 219–242 (cit. on p. 150).
- [284] David Ackley. *A connectionist machine for genetic hillclimbing*. Vol. 28. Springer Science & Business Media, 2012 (cit. on p. 153).
- [285] Frank Hoffmeister and Thomas Bäck. “Genetic algorithms and evolution strategies: Similarities and differences”. In: *International Conference on Parallel Problem Solving from Nature*. Springer. 1990, pp. 455–469 (cit. on p. 153).
- [286] Marius Lindauer, Katharina Eggensperger, Matthias Feurer, André Biedenkapp, Difan Deng, Carolin Benjamins, Tim Ruhkopf, René Sass, and Frank Hutter. “SMAC3: A Versatile Bayesian Optimization Package for Hyperparameter Optimization”. In: *Journal of Machine Learning Research* 23.54 (2022), pp. 1–9 (cit. on p. 155).
- [287] Patrick Raanes, Yumeng Chen, Colin Grudzien, Maxime Tondeur, and Remy Dubois. *DAPPER*. 2023. URL: <https://nansencenter.github.io/DAPPER/> (cit. on p. 157).
- [288] William Ditto and Toshinori Munakata. “Principles and applications of chaotic systems”. In: *Communications of the ACM* 38.11 (1995), pp. 96–102 (cit. on p. 157).
- [289] Sungyoon Lee, Hoki Kim, and Jaewook Lee. “Graddiv: Adversarial robustness of randomized neural networks via gradient diversity regularization”. In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* (2022) (cit. on p. 160).
- [290] Yannik Schälte, Emmanuel Klinger, Emad Alamoudi, and Jan Hasenauer. “pyABC: Efficient and robust easy-to-use approximate Bayesian computation”. In: *Journal of Open Source Software* 7.74 (2022), p. 4304. DOI: [10 . 21105 / joss . 04304](https://doi.org/10.21105/joss.04304). URL: <https://doi.org/10.21105/joss.04304> (cit. on p. 160).
- [291] Noah Hollmann, Samuel Müller, Katharina Eggensperger, and Frank Hutter. “TabPFN: A transformer that solves small tabular classification problems in a second”. In: *International Conference on Learning Representations*. 2023 (cit. on p. 161).
- [292] Noah Hollmann, Samuel Müller, Lennart Purucker, Arjun Krishnakumar, Max Körfer, Shi Bin Hoo, Robin Tibor Schirrmeyer, and Frank Hutter. “Accurate predictions on small data with a tabular foundation model”. In: *Nature* (2025) (cit. on p. 161).

- [293] Nguyen Dang, Özgür Akgün, Joan Espasa, Ian Miguel, and Peter Nightingale. “A Framework for Generating Informative Benchmark Instances”. In: *28th International Conference on Principles and Practice of Constraint Programming*. 2022, p. 1 (cit. on p. 176).
- [294] Will Steffen, Katherine Richardson, Johan Rockström, Hans Joachim Schellnhuber, Opha Pauline Dube, Sébastien Dutreuil, Timothy M Lenton, and Jane Lubchenco. “The emergence and evolution of Earth System Science”. In: *Nature Reviews Earth & Environment* 1.1 (2020), pp. 54–63 (cit. on p. 176).
- [295] Jure Brence, Ljupčo Todorovski, and Sašo Džeroski. “Probabilistic grammars for equation discovery”. In: *Knowledge-Based Systems* 224 (2021), p. 107077 (cit. on p. 177).
- [296] S Jacquemound, L Bidel, C Francois, and G Pavan. *ANGERS Leaf Optical Properties Database*. 2003 (cit. on p. 177).
- [297] National Ecological Observatory Network (NEON). *LAI - spectrometer - mosaic (DP3.30012.001)*. en. 2023. DOI: [10.48443/7X5A-MN68](https://doi.org/10.48443/7X5A-MN68). URL: <https://data.neonscience.org/data-products/DP3.30012.001/RELEASE-2023> (cit. on p. 177).
- [298] Pascal Vincent, Hugo Larochelle, Isabelle Lajoie, Yoshua Bengio, Pierre-Antoine Manzagol, and Léon Bottou. “Stacked denoising autoencoders: Learning useful representations in a deep network with a local denoising criterion.” In: *Journal of Machine Learning Research* 11.12 (2010) (cit. on p. 179).
- [299] Natalie Maus, Haydn Jones, Juston Moore, Matt J Kusner, John Bradshaw, and Jacob Gardner. “Local latent space bayesian optimization over structured inputs”. In: *Advances in Neural Information Processing Systems* 35 (2022), pp. 34505–34518 (cit. on p. 180).
- [300] Austin Tripp, Erik Daxberger, and José Miguel Hernández-Lobato. “Sample-efficient optimization in the latent space of deep generative models via weighted retraining”. In: *Advances in Neural Information Processing Systems* 33 (2020), pp. 11259–11272 (cit. on p. 180).
- [301] Peng Sun, Peter M van Bodegom, Joris Timmermans, Shuwen Liu, Jin Wu, and Marco D Visser. “Hybrid modelling of leaf traits: Integrating neural networks with radiative transfer theory”. In: *Remote Sensing of Environment* 329 (2025), p. 114958 (cit. on p. 181).
- [302] Roberta H Yuhas, Alexander FH Goetz, and Joe W Boardman. “Discrimination among semi-arid landscape endmembers using the spectral angle mapper (SAM) algorithm”. In: *JPL Airborne Geoscience Workshop. Volume 1: AVIRIS Workshop*. 1992 (cit. on p. 218).



SUPPLEMENTARY INFORMATION

A.1. PROSAIL INVERSION IMPLEMENTATION DETAILS

A.1.1. LOSS FUNCTIONS

When performing analyses on a loss landscape, the selection of an appropriate loss function (similarity metric d) can be of great importance. In the case of multispectral data, the simplest approach would be to consider all bands independently, and apply the mean absolute error (MAE) (or L_1 loss) function to compare the simulated spectrum $\hat{\mathbf{x}}$ and the observed spectrum $\mathbf{x}$ as:

$$MAE(\hat{\mathbf{x}}, \mathbf{x}) = \frac{1}{B} \cdot \sum_{b=0}^B |\hat{\mathbf{x}}_b - \mathbf{x}_b| \quad (\text{A.1})$$

Here B is the number of bands in the spectrum. However, the values of spectral bands can greatly differ in magnitude, causing the MAE to be biased towards the bands with the greatest expected reflectance values (such as infrared). A relatively simple way to alleviate this problem is to use the proportional mean absolute error (PMAE), which is equivalent to the mean absolute percentage error (MAPE) used in other work [50], but does not convert the representation to percentages:

$$PMAE(\hat{\mathbf{x}}, \mathbf{x}) = \sum_{b=0}^B \frac{|\hat{\mathbf{x}}_b - \mathbf{x}_b|}{s_b} \quad (\text{A.2})$$

MAE and PMAE are intuitive loss functions for the reconstruction of spectral data. However, in some applications, the brightness or albedo of a spectrum overall is less important than the ratio of band values compared to other band values,

forming the hue of the spectrum. The spectral angle mapper (SAM) loss function [302] can be used to try to capture this aspect of a reconstruction, and can be computed as:

$$SAM(\hat{\mathbf{x}}, \mathbf{x}) = \arccos \frac{\hat{\mathbf{x}} \cdot \mathbf{x}}{(\hat{\mathbf{x}} \cdot \hat{\mathbf{x}})^{1/2} (\mathbf{x} \cdot \mathbf{x})^{1/2}} \cdot \frac{180}{\pi} \quad (\text{A.3})$$

A.1.2. OPTIMISATION PROCEDURE

We treat the numerical optimisation procedure as a black-box optimisation problem. Within black-box optimisation algorithms, the tradeoff between *exploration* (identifying promising new parts of the search space) and *exploitation* (improving already known promising solutions until convergence) is often a central concept. In unimodal landscapes, only a single optimum exists, allowing greedy algorithms such as hill climbing or greedy local search (for an overview of stochastic local search methods, see [64]) to quickly converge to a local optimum, committing fully to exploitation. If the landscape is multimodal, there are multiple different local optima, causing greedy algorithms to get stuck in local optima. In this case, algorithms that add more exploration to their optimisation heuristics would be necessary.

Our experiments used greedy local search as an optimisation algorithm. For every instance, we initialised the current solution c to the mean of the prior distributions of the free parameters. At every optimisation step, we generated a candidate new solution θ' by perturbing the elements of θ : $\theta'_p = c_p + \mathcal{N}(0, \sigma_p)$, where p is a parameter in θ and $\sigma_p = 0.05 \cdot \frac{\max(p) - \min(p)}{2}$. Here σ_p represents the intensity of the perturbation for a parameter p ; we set it to 5% of the middle-way point of the parameter range (e.g., if a parameter ranges from 0 to 10, its perturbation intensity would be $0.05 \cdot \frac{10-0}{2} = 0.25$), though other mutation strategies could also be considered. If $\mathcal{L}(M(\theta'), \mathbf{x}) < \mathcal{L}(M(\theta), \mathbf{x})$, θ' becomes the new θ . This procedure is iterated until the function evaluation budget has been exhausted.

Using greedy local search resulted in two main advantages. First, convergence will be fast, reducing the computational load of our experiments. Second, using a greedy algorithm allows us to test for multimodality (since the algorithm could converge to different optima when repeating an optimisation procedure), which is important to Section 5.4.1.

We note that, if the results for our experiments described in Section 5.4.1 indicate that PROSAIL inversion is a multimodal problem, a global optimisation method would need to be used to enable reliable convergence to a global optimum.

A.2. PROSAIL INVERSION: REAL-WORLD SENTINEL-2 DATA

Although our main experiments in Chapter 5 focussed on simulated data, since this allowed us access to both noise-free and noisy data, it is possible that there are other factors, beyond the Gaussian noise and spectral mixing we considered in Section 5.4.2, that result in ill-posedness for parameter retrieval using real-world data. To ensure that the patterns we found (well-posedness of PROSAIL inversion) hold for real-world data as well, we performed additional analyses on real-world data, as shown in Figure 5.6.

The Sentinel-2 dataset in question that we used was the SEN2-MSI-T cloud removal dataset from Chapter 4. While any Sentinel-2 Level-2A-based dataset would work, this dataset offered a convenient mix of scale and diversity. The dataset consists of 5 land cover classes, each split into a geographically diverse set of 4 scenes, resulting in 20 total locations. Every scene contained a cloud-free observation at 5 time steps within a period of 6 months, resulting in a total of 100 geospatially- and temporally diverse images. From each image, we took the centre pixel as the representative spectrum for the image (using multiple pixels from the same image could have biased the evaluation to the specific images of the dataset). Therefore, this dataset enabled us to evaluate on a curated, diverse set of 100 real-world instances and check if the PROSAIL inversion loss landscapes were still well-posed.

B

ADDITIONAL RESULTS

B.1. PROSAIL INVERSION

B.1.1. OPTIMISATION CONVERGENCE

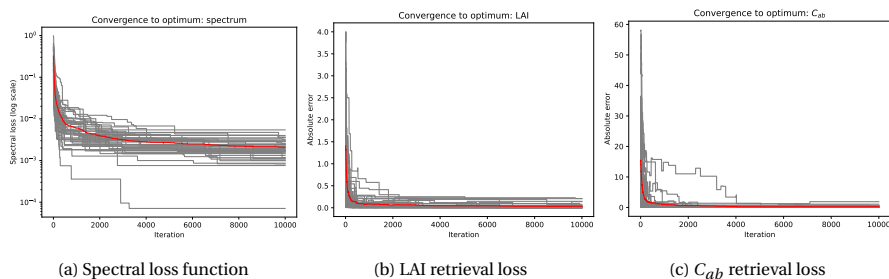


Figure B.1: Visualisation of convergence to a stable solution based on the spectral loss function (B.1a), the retrieval loss for LAI (B.1b), and the retrieval loss for C_{ab} (B.1c). In these plots, every gray line represents a randomly sampled instance from D , and the red line represents the mean of these runs. Out of the free parameters in our experiments, LAI took longer than other parameters to converge, but still did so within the budget limit. On average (the red lines), the parameters converged to stable values within 1000 iterations, with later iterations only slightly improving the spectral loss further.

We performed this additional experiment to verify that the function evaluation budget used in our experiments is sufficient to converge to a stable optimum, both in terms of the spectral loss value and the parameters of the configuration θ . We performed our optimisation approach on 100 random instances, and plotted the loss values for the spectrum (which the optimisation algorithm uses to perform

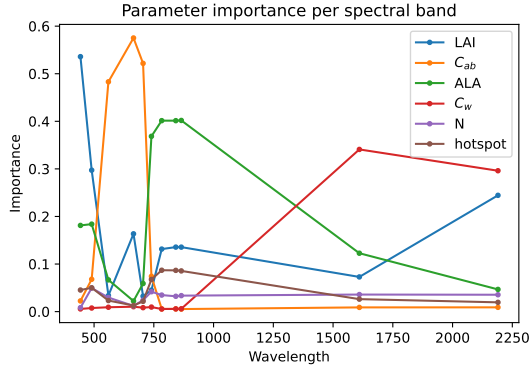


Figure B.2: Relative importance of different parameters for different wavelengths. Every point on a line represents the average importance of the parameter of that line in determining the MAE for a particular spectral band's wavelength.

optimisation) and for the retrieved parameters in the configuration (which the algorithm does not have access to, and is plotted for evaluation purposes). A very low rate of improvement for later iterations would indicate that the budget is sufficient to converge to a stable optimum.


The results of this experiment can be found in Figure B.1. As the figure shows, the function evaluation budget allotted to the optimisation algorithm is sufficient to converge to stable values on average, and a convergence of the spectral loss (Figure B.1a) corresponds to a convergence of the retrieval losses of individual parameters (Figures B.1b and B.1c). As a result, our experimental setup appears to be well suited to answer our research questions.

B.1.2. PARAMETER IMPORTANCE PER BAND

In addition to our main parameter importance experiment, we computed the importance of 6 of the globally most important parameters at every Sentinel-2 band, and plotted this in Figure B.2. As can be seen in the figure, the relative importance of the parameters can vary greatly between spectral bands. Therefore, parameters with a relatively low global importance may still be relatively easily retrievable, due to the sensitivity of the loss landscape to these parameters in local, specialised parts of the parameter space. All parameters from our selection have a part of the spectrum where they have the highest impact (LAI for ultraviolet and blue, chlorophyll for green, red and near-infrared, leaf angle for short-wave infrared, and leaf water content for infrared).


B.1.3. PROSAIL INVERSION SAM RESULTS

These supplementary figures contain the results for our experiments for the SAM loss function, corresponding to the same analyses we provide in Section 5.5 for the PMAE loss function. We have moved these figures to the supplementary material because their patterns largely conformed to those for PMAE. Figure B.3 contains results for Experiment 2, Figure B.4 contains results for Experiment 3, Table B.1 contains results for Experiment 4, and Table B.2 contains results for Experiment 5.

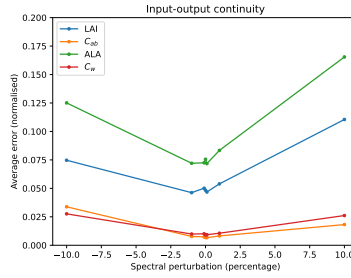

(a) Shift per perturbation

Figure B.3: The continuity of the output for PROSAIL inversion (predicted configuration $\hat{\theta}$) with respect to perturbations to the input (spectrum), aggregated over all 1000 instances and normalised to a 0-1 range based on the bounds of the parameter range. Unlike in the PMAE results, the best solution for no perturbation (0 on the x-axis) did not have a near-zero error rate for LAI and ALA; this suggests that SAM may not be an appropriate choice as an optimisation loss function.

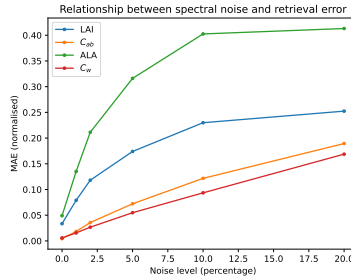

(a) Performance per noise level

Figure B.4: The impact of spectral noise on retrieval performance, aggregating the 'shifted optimum' phenomenon over all 1000 instances, showing that it is a consistent pattern, and the intensity of the shifts increases as the noise level increases.

Parameter	Normalised MAE target			
	$\alpha_1\theta_1^+ + \alpha_2\theta_2^+ + \alpha_3\theta_3^+$	θ_1^+	θ_2^+	θ_3^+
LAI	0.136 ± 0.167	0.199 ± 0.182	0.203 ± 0.187	0.206 ± 0.19
C_{ab}	0.057 ± 0.058	0.128 ± 0.113	0.121 ± 0.109	0.123 ± 0.11
ALA	0.24 ± 0.172	0.296 ± 0.233	0.299 ± 0.241	0.307 ± 0.233
C_w	0.043 ± 0.053	0.082 ± 0.069	0.084 ± 0.072	0.087 ± 0.073

Table B.1: Results for E4 on the impact of spectral mixing. Every cell represents the (normalised) MAE between the optima found for the mixed spectrum $\mathbf{x}'$ and the quantities listed in the columns. The first column represents the weighted mean of the true configurations of the constituent spectra $\mathbf{x}_1$, $\mathbf{x}_2$ and $\mathbf{x}_3$, while the other columns represent the MAE compared to these individual constituent configurations. This suggests that the solution for mixed spectra matches the weighted mean of the constituent configurations more closely than the configuration of any individual constituent spectrum.

Range interval	LAI prior range interval size				
	0%	10%	30%	50%	100%
LAI (uniform)	[1]0.0 $\pm$ 0.0	[2]0.473 $\pm$ 0.289	[3]1.413 $\pm$ 0.863	[4]2.214 $\pm$ 1.37	[5]2.978 $\pm$ 2.124
LAI	[1]0.0 $\pm$ 0.0	[2]0.755 $\pm$ 0.33	[3]1.606 $\pm$ 1.054	[4]1.995 $\pm$ 1.572	[5]2.151 $\pm$ 1.851
C_{ab}	[2]10.86 $\pm$ 15.61	[1]10.35 $\pm$ 15.497	[3]11.455 $\pm$ 15.626	[4]12.084 $\pm$ 15.965	[5]12.23 $\pm$ 16.092
ALA	[1]24.908 $\pm$ 22.832	[2]30.773 $\pm$ 22.476	[3]34.7 $\pm$ 23.514	[4]35.712 $\pm$ 24.424	[4]35.725 $\pm$ 24.357
C_w	[1]0.004 $\pm$ 0.007	[1]0.005 $\pm$ 0.007	[3]0.005 $\pm$ 0.008	[4]0.005 $\pm$ 0.008	[5]0.005 $\pm$ 0.008

Table B.2: Mean absolute error rates for parameter retrieval performance for the four different parameters (rows), with columns representing the interval size of a range constraint prior on LAI (with 100% covering the full original parameter range). The 'LAI (uniform)' row represents the performance of estimating LAI through uniform random sampling, while in other columns, performance is acquired through optimisation. In each row, the prior range size in a column marked with a lower number (e.g., [1]) retrieves a parameter significantly better (significance level $\alpha = 0.05$) than one with a higher number (e.g., [2]). Adding range constraint priors on LAI greatly improved LAI retrieval performance, while also improving ALA (but not C_{ab} and C_w) retrieval performance.

B.2. EMMI

B.2.1. ϵ -MANIFOLD EFFECTIVENESS WITH PRECISION AND RECALL

Dataset	ϵ -manifold		Uncertainty quantification	
	Precision	Recall	Precision	Recall
PROSAIL	1.0	1.0	1.0	0.68
PROSAIL 2D	0.94	0.38	1.0	0.48
TP	0.99	0.6	1.0	0.24
Lorenz63	0.99	0.8	0.85	0.3
GM	0.81	0.94	0.99	0.79
TM	0.96	0.98	0.87	0.56
LR	0.82	0.94	1.0	0.52

Table B.3: Results for the oracle-based ϵ -manifold validation experiment for RQ2, showing precision and recall scores for a classification task where, for every instance, the true values θ^+ had to be predicted along with a negative sample from the validation points. For these metrics, only a single score could be computed.

B.2.2. EMMI RESULTS WITH PRECISION AND RECALL

Table B.4: Precision of the different methods approximating the ϵ -manifolds, with all hyperparameters for all methods (including the appropriate eMMI variant) automatically determined through hyperparameter optimisation. For every simulator, the best performance has been marked in **boldface**, with statistical significance determined by a Wilcoxon signed-rank test at significance level $\alpha = 0.05$.

Method	PROSAIL	PROSAIL 2D	TP	Lorenz63	GM	TM	LR
RF	0.67 $\pm$ 0.46	0.57 $\pm$ 0.37	0.89 $\pm$ 0.12	0.51 $\pm$ 0.15	0.91 $\pm$ 0.17	0.38 $\pm$ 0.37	0.05 $\pm$ 0.22
GP	0.75 $\pm$ 0.09	0.58 $\pm$ 0.13	0.51 $\pm$ 0.03	0.5 $\pm$ 0.0	1.0 $\pm$ 0.01	0.5 $\pm$ 0.0	0.5 $\pm$ 0.0
BNN	0.51 $\pm$ 0.09	0.67 $\pm$ 0.15	0.51 $\pm$ 0.03	0.5 $\pm$ 0.0	0.58 $\pm$ 0.13	0.5 $\pm$ 0.0	0.5 $\pm$ 0.0
ABCSMC	0.34 $\pm$ 0.31	0.37 $\pm$ 0.32	0.38 $\pm$ 0.32	0.37 $\pm$ 0.24	0.27 $\pm$ 0.38	0.32 $\pm$ 0.33	0.42 $\pm$ 0.48
TabPFN	0.0 $\pm$ 0.0	0.0 $\pm$ 0.0	0.0 $\pm$ 0.0	0.0 $\pm$ 0.0	0.0 $\pm$ 0.0	0.0 $\pm$ 0.0	0.0 $\pm$ 0.0
eMMI	0.84 $\pm$ 0.1	0.86 $\pm$ 0.12	0.9 $\pm$ 0.12	0.59 $\pm$ 0.2	1.0 $\pm$ 0.0	0.68 $\pm$ 0.14	0.96 $\pm$ 0.1

Method	PROSAIL	PROSAIL 2D	TP	Lorenz63	GM	TM	LR
RF	0.09 ± 0.11	0.15 ± 0.16	0.01 ± 0.01	0.03 ± 0.02	0.84 ± 0.23	0.27 ± 0.37	0.0 ± 0.0
GP	0.67 ± 0.21	0.7 ± 0.22	0.97 ± 0.11	1.0 ± 0.01	0.26 ± 0.24	1.0 ± 0.0	1.0 ± 0.0
BNN	0.93 ± 0.2	0.85 ± 0.27	0.98 ± 0.08	1.0 ± 0.0	0.85 ± 0.29	1.0 ± 0.0	1.0 ± 0.0
ABCSMC	0.34 ± 0.37	0.44 ± 0.41	0.32 ± 0.33	0.35 ± 0.32	0.16 ± 0.29	0.4 ± 0.44	0.0 ± 0.0
TabPFN	0.0 ± 0.0	0.0 ± 0.0	0.0 ± 0.0	0.0 ± 0.0	0.0 ± 0.0	0.0 ± 0.0	0.0 ± 0.0
eMMI	0.95 ± 0.19	0.96 ± 0.07	0.86 ± 0.26	0.43 ± 0.3	0.95 ± 0.14	0.98 ± 0.12	0.79 ± 0.25

Table B.5: Recall of the different methods approximating the ϵ -manifolds, with all hyperparameters for all methods (including the appropriate eMMI variant) automatically determined through hyperparameter optimisation. For every simulator, the best performance has been marked in **boldface**, with statistical significance determined by a Wilcoxon signed-rank test at significance level $\alpha = 0.05$.

ACKNOWLEDGEMENTS

After all the “academic we” that you, as the reader, have just endured, it seems only fitting that this short section can provide some relief in favour of a more personal touch. After four years of working as a PhD, I certainly understand now why everyone feels the need to add these acknowledgements: so much in how a PhD is experienced depends on the people who support it.

In this vein, the first people to thank are my supervisors. Mitra, you are clearly doing something right, because even after working together since 2019 I still enjoy the process, and constantly learn from you. Thank you for all the opportunities you have given me that I have gladly taken, and for being the kind of supervisor who makes academia both a safe and pleasant experience for PhD students, and a stimulating environment to learn and grow. Peter, thank you for guiding me in the scary foreign place that is “the domain”, and for the unfailingly kind and patient welcome I received in it. At times I nearly forgot I had work to do as I learned about concepts in biology and ecology, and to this day, I continue to read about these topics out of general interest. Holger, your views on AI, science and Europe are inspiring and closely match my own ideals, therefore finding very fertile soil in my brain. I suspect that my newfound hobby of following your social media posts, which bring some much-needed reality checks to the business influencer-dominated public discourse on AI, will remain a highly enjoyable passtime for the foreseeable future.

I would like to express my gratitude to everyone in the ADA research group, especially my fellow PhDs. I have learned much from you, from the excellent examples I could look up to when I joined as a Master student to the new students newly introduced to the group. In a vaguely chronological order: Jan, Koen, Marie, Anna, Can, Jeroen, Matthias, Bram, Mike, Annelot, Maedeh, Samira, Hadar, Thijs, Andreas, Khashayar, Inês, Nansheline and Sietse. A special mention should go to Julia, who was the first Master student I ever supervised (feeling woefully under-qualified for the task as a fresh PhD), and not soon after, became the one colleague-PhD with whom I could jointly commiserate over the frustrations of working with EO data as an AI researcher. Also thanks to the part of ADA at RWTH Aachen, whom I always feel like I should find ways to spend more time with, and all the Master and Bachelor students who have come and gone (I’m sorry, there are just so many of you!).

Thank you to Alistair for being my guide during my research visit to ϕ -lab at

ESA, both in terms of work and in terms of cool slightly hidden vegan restaurants in the middle of Rome. Thanks also to James and Athanasia for their involvement when they were my contacts at ESA. Thanks to Juhuhn, my friend from back in our Master student days, with whom my research trajectory always seems strangely, but enjoyably, synced.

I tend to be more reserved when it comes to my private life, but the brevity of this paragraph should not be misinterpreted as it being the least important category. My work brings me satisfaction, which I appreciate a great deal. However, my happiness stems from my family and my partner Areum, which deserves more thanks than can be expressed through this public medium.

CURRICULUM VITÆ

Laurens Arp was born on 23 January 1995 in Haarlem, The Netherlands. He pursued his Bachelor studies at Vrije Universiteit Amsterdam, where he studied Lifestyle Informatics, followed by his Master studies in the Artificial Intelligence specialisation of Computer Science at Leiden University. He carried out his Master thesis with the ADA research group at Leiden Institute of Advanced Computer Science (LIACS), supervised by Dr. Mitra Baratchi, and graduated in 2020. After this, he kept working with the ADA group as a PhD candidate supervised by Dr. Mitra Baratchi and Prof.dr. Holger Hoos from LIACS, and Prof.dr. Peter van Bodegom from the Institute of Environmental Sciences (CML). During this time he also collaborated closely with research fellows from the European Space Agency (ESA), and spent time as a visiting researcher at the ϕ -lab at the European Space Research Institute (ESRIN) location of ESA in Frascati, Italy.

Laurens' interests lie in interdisciplinary work where typical machine learning assumptions are violated, particularly for relevant spatio-temporal problems such as environmental challenges, urban planning and socio-economic conditions, which often involves Earth observation data. He is currently working as a postdoctoral researcher at Leiden University, researching causal machine learning for spatio-temporal data. During his PhD studies, he took various AI courses at the European Summer School on AI (ESSAI) and Advanced Course on Artificial Intelligence (ACAI) in Ljubljana, in addition to courses on transferable skills such as project management, oral presentation skills and scientific conduct, among others.

LIST OF PUBLICATIONS

UNDER REVIEW

- 1. **Laurens Arp**, Peter van Bodegom, Nguyen Dang, Alistair Francis, Holger H. Hoos, and Mitra Baratchi. Inference from Noisy Observations through Model Inversion: Constructing ϵ -Manifolds of Potentially Valid Solutions. Under review.

2026

- 1. **Laurens Arp**, Peter van Bodegom, Holger H. Hoos, and Mitra Baratchi. Characterising the Ill-posedness of PROSAIL Inversion for Biophysical Parameter Retrieval. In *European Journal of Remote Sensing*, 59(1).

2024

- 2. **Laurens Arp**, Holger H. Hoos, Peter van Bodegom, Alistair Francis, James Wheeler, Dean van Laar, and Mitra Baratchi. 2024. Training-free thick cloud removal for Sentinel-2 imagery using value propagation interpolation. In *ISPRS Journal of Photogrammetry and Remote Sensing*, 216.
- 1. Julia Wąsala, Suzanne Marselis, **Laurens Arp**, Holger Hoos, Nicolas Longép   and Mitra Baratchi. 2024. AutoSR4EO: An AutoML Approach to Super-Resolution for Earth Observation Images. In *Remote Sensing*, 443.

2022

- 1. **Laurens Arp**, Mitra Baratchi, and Holger H. Hoos. 2022. VPint: value propagation-based spatial interpolation. In *Data Mining and Knowledge Discovery*, 36.

Included in this Thesis.

GLOSSARY

automated algorithm configuration an optimisation problem where the hyperparameters of algorithms are automatically tuned based on an objective function [23](#)

AutoML automated machine learning: automated model selection and algorithm configuration for machine learning problems [23](#)

band a data dimension for an EO image containing measurements for a specific variable [13](#)

black-box optimisation a type of optimisation problem/algorithm in which only the inputs and outputs of an objective function g can be observed, with no knowledge about g itself [22](#)

configuration a vector θ containing concrete value assignments for the physical parameters P [1](#), [22](#)

convolutional neural network a type of neural network where local spatial patterns are extracted using convolutional kernels [32](#)

data product a dataset containing estimations for quantities of interest through the processing of EO data [13](#)

Earth Observation data obtained through sensors observing the Earth [11](#)

hybrid model a machine learning model trained on the inverse of simulated data produced by an RTM [20](#)

hyperspectral spectral (optical) data containing many spectral bands [16](#)

ill-posed a problem that does not meet the requirements of well-posedness [21](#)

in-situ direct measurements of relevant physical parameters [12](#)

inference the estimation of the properties that generated an observed outcome [2](#)

Landsat satellites operated by NASA, many of which contain a spectrometer as a sensor 15

look-up table a tabular dataset generated by an RTM, containing generating parameters and simulated outcomes 20

loss landscape a surface in $d + 1$ -dimensional space describing the loss function value of every point in the parameter space 101

model inversion the inversion of a (simulation) model capturing the data generation process for an inference problem 19

MODIS optical satellites operated by NASA with a high temporal resolution and a low spatial resolution 15

multispectral spectral (optical) data containing multiple spectral bands, often including wavelengths outside the visible ranges 15

optical data data containing measurements of a light spectrum 15

parameter estimation an inference setting where the value of a physical parameter p must be inferred from some observed feature data $\mathbf{x}$ 2

parameter space (search) space of the parameter domain D_P containing all possible combinations of parameter values 100

physical parameter a variable p in a set of scientific variables P describing the state of a physical system 1

PROSAIL a radiative transfer model for vegetation, combining the PROSPECT and 4SAIL models 19

radiative transfer model a type of physical model that simulates a light spectrum based on physical input parameters 19

remote sensing data obtained remotely by sensors not directly interacting with the object being observed 13

search space space containing all possible combinations of parameter values, through which we must perform a search to find an optimum 22

sensor network a spatially distributed network of sensors, measuring a target variable at specific points 12

Sentinel-2 multispectral optical satellites operated by ESA [15](#)

spatial interpolation filling in a spatial grid of missing values in between of a number of known measurements [27](#)

spectral band a measurement of light intensity for a single wavelength on a light spectrum [15](#)

spectrometer an optical sensor measuring light intensity at certain wavelengths [15](#)

swath width of a remote sensing sensor passing over a study area [13](#)

VPint our proposed spatial interpolation algorithm founded on a system-oriented perspective [33](#)

VPint2 our proposed spatial interpolation algorithm suitable for filling in gaps in optical satellite imagery [66](#)